

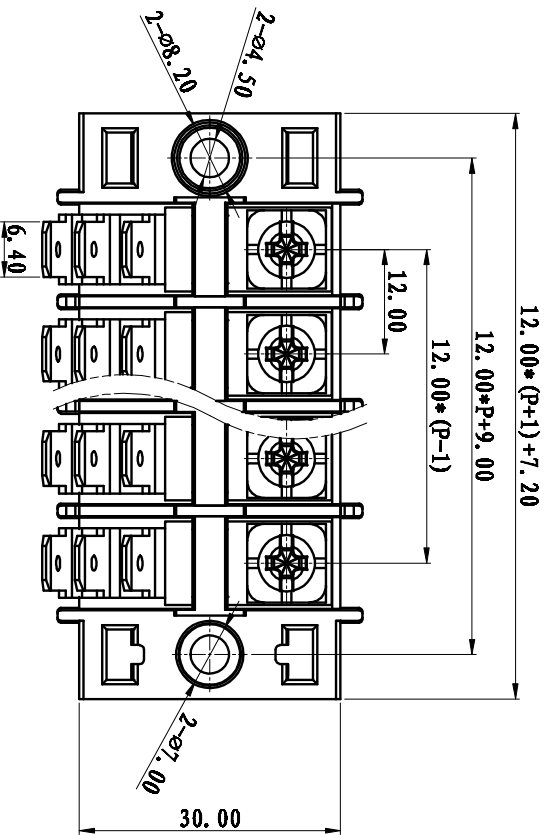


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

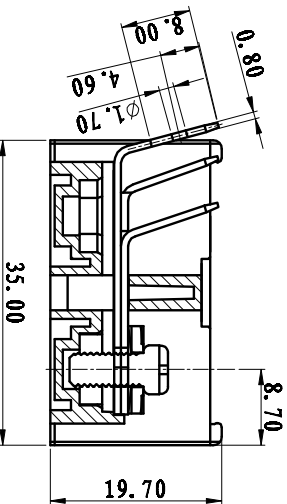

NOTES:
Pitch : 12.0mm
Rated Voltage : 600V
Rated Current : 25A
Withstand Voltage : AC3000V for 1 minute
Insulation Resistance : 1000MΩ / DC1000V
Using Temperature Range : -40℃ ~ +105℃
Suitable Electric Wire: 22-14 AWG
Screw Torque Value : M4/1.2Nm

技术要求:
间距: 12.0mm
额定电压: 600V
额定电流: 25A
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+105℃
适用线规: 22-14 AWG
螺丝扭矩: M4/1.2Nm

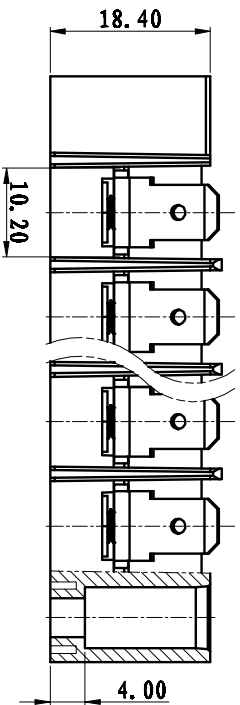

	pitch dimension			Nominal dimension					—  (
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
								0.05/10	

4	M4*9-10*10	SPFELA09073V	P	碳钢	镀锌
3	M4外六角螺母	SM00A000004V	P	铁	镀锌
2	JY0-66-早电件2	6JY0BD02664V	P	黄铜	镀锌
1	TB1-25IX-A本体	6TB1M7210V	1	PC	
DES.	LDD	DATE	2015/05/07	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-25IX-B成品