
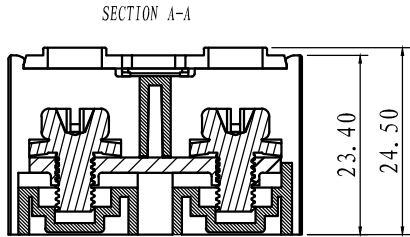
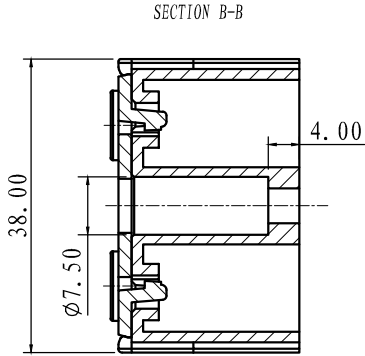
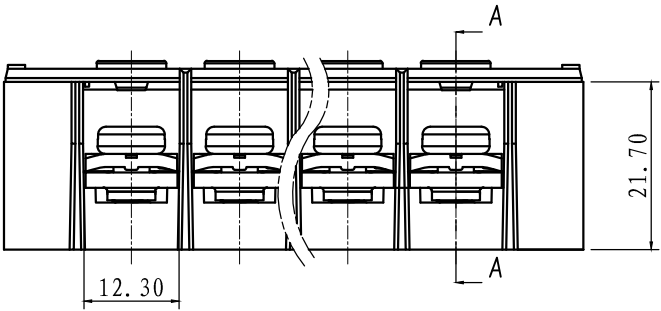


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

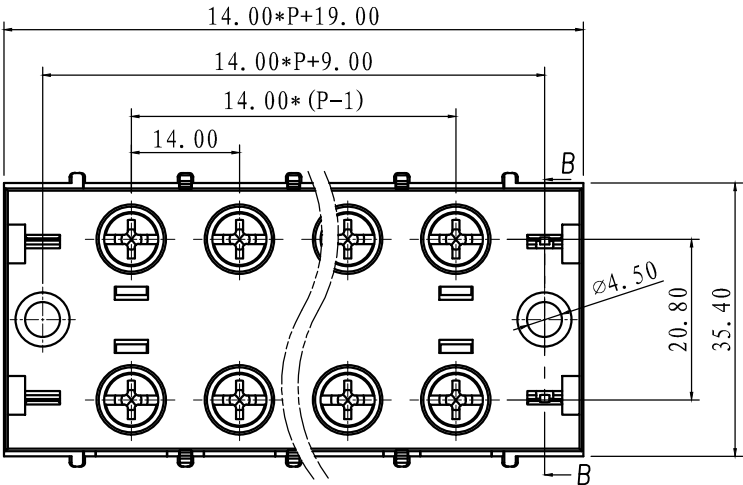

技术要求:

间距: 14.0mm

额定电压: 600V

额定电流: 45A

耐电压值: AC3000V/min


绝缘阻抗: $1000M\Omega/DC1000V$

使用条件: $-40^{\circ}C \sim +105^{\circ}C$

适用线规: 22-10 AWG

螺丝扭矩: M5/2.0Nm

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		 
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

5	标记条		1	A4腹膜纸	
4	M5*10-12*12螺丝	SPFSA501099V	2P	碳钢	镀蓝白锌
3	TA-40A-导电件	6TB1BDD040AV	P	黄铜	镀镍
2	TB1-45XX-A盖板	6TB1C7045X0V	1	PC	透明
1	TB1-45XX-A主体	6TB1E0Y45X0V	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ZSH	DATE 2016/03/10	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4		SHEET 1 of 1
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-6TB35A1 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O., LTD				TITLE	
				TB1-45XX-A-130-00A TB1-45XX-A成品	