


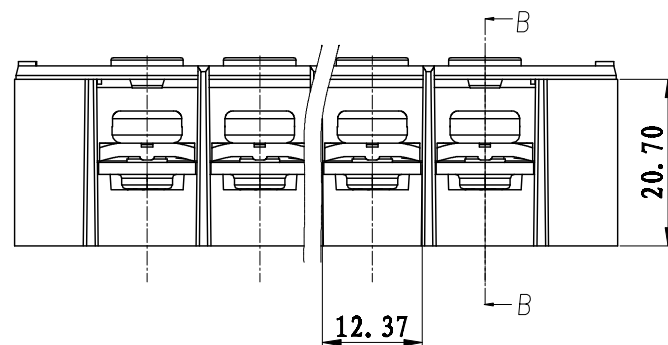


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	两侧固定孔壁厚加厚		

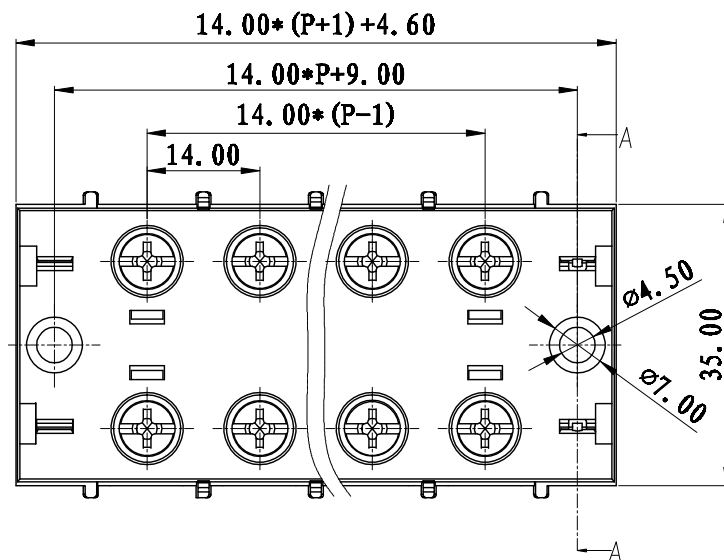

SECTION A—A

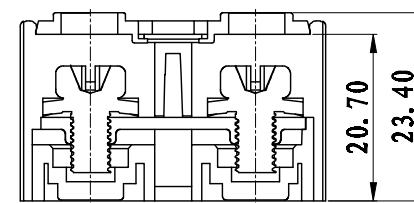

SECTION B—B

技术要求:

间距: 14.0mm

额定电压: 600V

额定电流: 35A

耐电压值: AC3000V/min


绝缘阻抗: 1000MΩ/DC1000V

使用条件: -40℃~+105℃

适用线规: 22-12 AWG

螺丝扭矩: M5/2.0Nm

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	标记条 (共用45A)			1	A4腹膜纸	
4	M5*10-12*12带垫片螺丝		SPFSA501099V	2P	碳钢	镀蓝白锌
3	JH9-30A导电件		6JH9BDD030AV	P	黄铜	镀镍
2	TB1-45XX-A透明盖		6TB1C700450V	1	PC	透明
1	TB1-35XX-A本体		6TB1C700350V	1	PC	黑色
NO. NAME OF PART		NO. OF PART		QTY	MATERIAL	NOTES
DES.	ZSH	DATE	2016/03/10	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	
APP.		DATE		SCALE	1:1	
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE
						TB1-35XX-A-130-00A
						TB1-35A-成品