



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

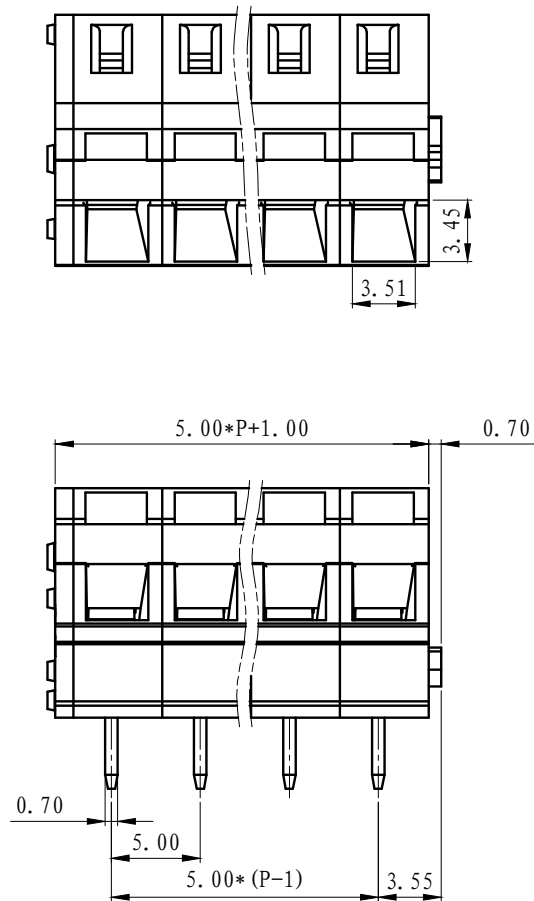

NOTES:
Pitch : 5.0mm
Rated Voltage : 300 V
Rated Current : 17 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC1000V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 24~ 14AWG
Stripping length:6mm


技术要求:
间距: 5.0mm
额定电压: 300V
额定电流: 17A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC1000V
使用温度: -40℃~+105℃
适用线规: 24~ 14AWG
剥线长度: 6mm

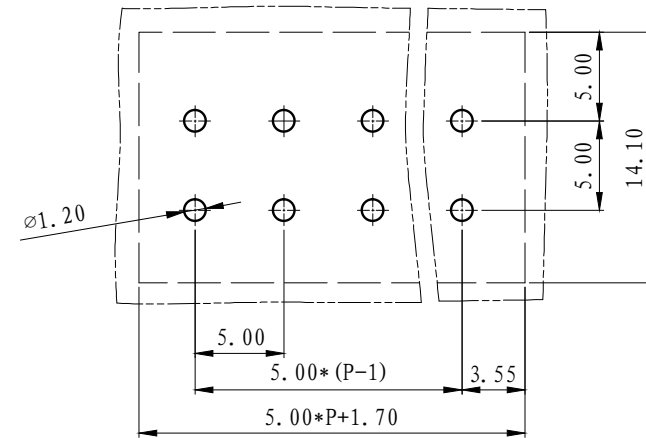

	pitch dimension			Naminal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0	6	10	0	30	60	100	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10




4	LS243-弹片	F2A0DLS243BV	P	不锈钢	
3	LS243-焊脚	3007B0001AV	P	紫铜	镀雾锡
2	LS245-盖板	3008C0Y01AV	1	PA66-V0	
1	LS245-5.0-主体	3008A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/3/31	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1: 1
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LS245-5.0-XXP-1Y-00A
					LS245-5.0-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

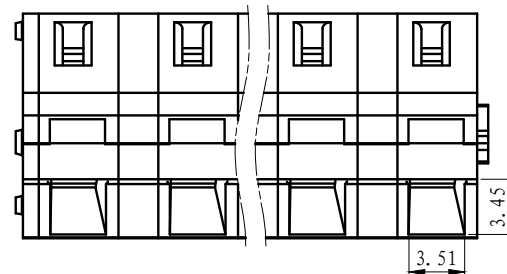

NOTES:
Pitch : 7.5mm
Rated Voltage : 300 V
Rated Current : 17 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC1000V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 24~ 14AWG
Stripping length : 6mm


技术要求:
间距: 7.5mm
额定电压: 300V
额定电流: 17A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ/DC1000V
使用温度: -40℃~+105℃
适用线规: 24~ 14AWG
剥线长度: 6mm

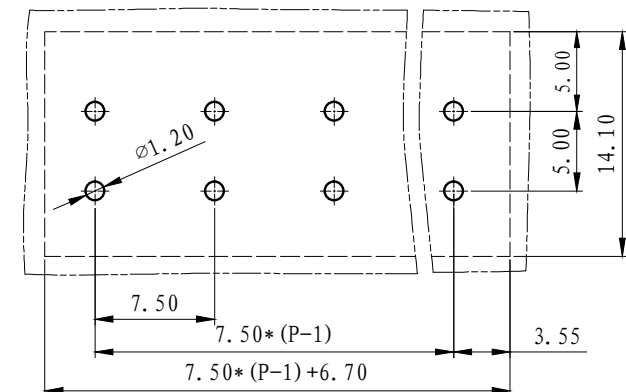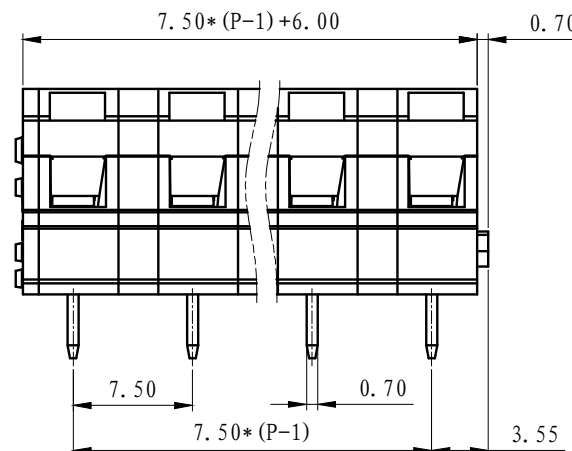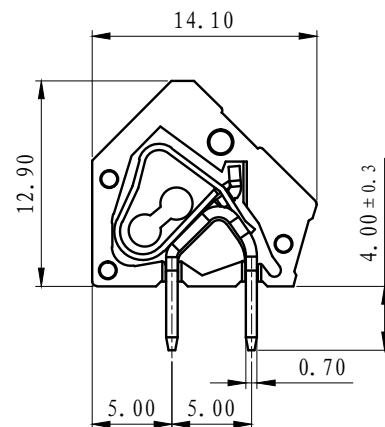

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10




5	LS243-弹片	F2A0DLS243BV	P	不锈钢	
4	LS243-焊脚	3007B0001AV	P	紫铜	镀雾锡
3	LS245-盖板	3008C0Y01AV	1	PA66-V0	
2	LS245-2.5-隔板	3008H0Y02AV	P-1	PA66-V0	
1	LS245-5.0-主体	3008A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLN	DATE	2012/3/31	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LS245-7.5-XXP-1Y-00A
					LS245-7.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

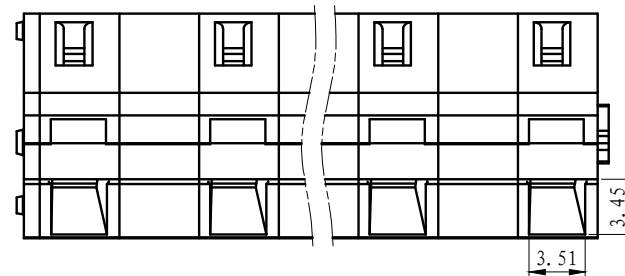

NOTES:
Pitch : 10.0mm
Rated Voltage : 300 V
Rated Current : 17 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC1000V
Using Temperature Range :
-40℃ ~ +105℃
Wire range : 24~ 14AWG
Stripping length: 6mm

技术要求:
间距: 10.0mm
额定电压: 300V
额定电流: 17A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ/DC1000V
使用温度: -40℃~+105℃
适用线规: 24~ 14AWG
剥线长度: 6mm

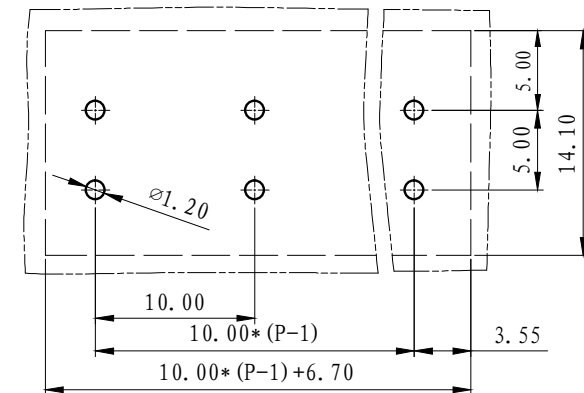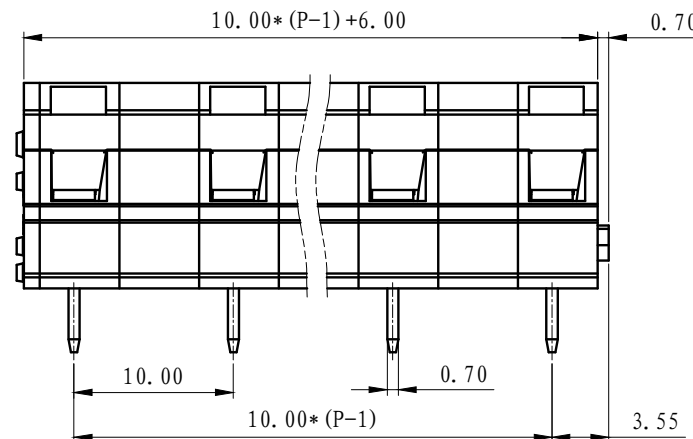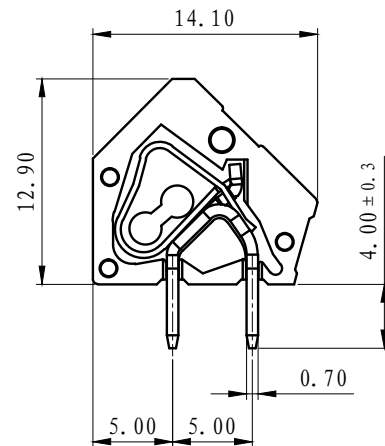

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LS243-弹片	F2A0DLS243BV	P	不锈钢	
4	LS243-焊脚	3007B0001AV	P	紫铜	镀雾锡
3	LS245-盖板	3008C0Y01AV	1	PA66-V0	
2	LS245-5.0-隔板	3008H0Y01AV	P-1	PA66-V0	
1	LS245-5.0-主体	3008A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/3/31	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LS245-10.0-XXP-1Y-00A
					LS245-10.0-成品