


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

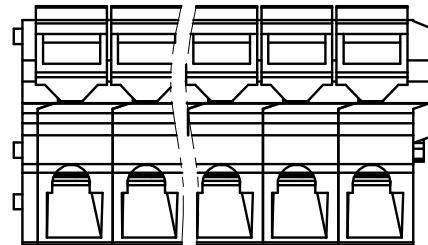

NOTES:

Pitch : 5.0mm

Rated Voltage : 300 V

Rated Current : 17 A

Withstand Voltage :

AC2500V for 1 minute

Insulation Resistance :

500MΩ / DC500V

Using Temperature Range :

-40℃ ~ +105℃

Wire range : 24~14AWG

Stripping length: 6mm

技术要求:

间距: 5.0mm

额定电压: 300V

额定电流: 17A



耐电压值: AC2500V/min

绝缘阻抗: 500MΩ/DC500V

使用条件: -40℃~+105℃

适用线规: 24~14 AWG


剥线长度: 6mm

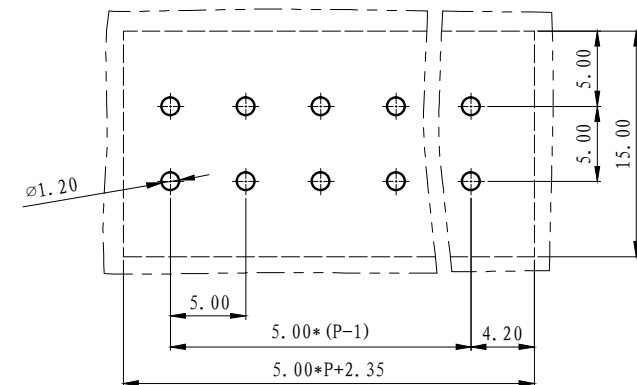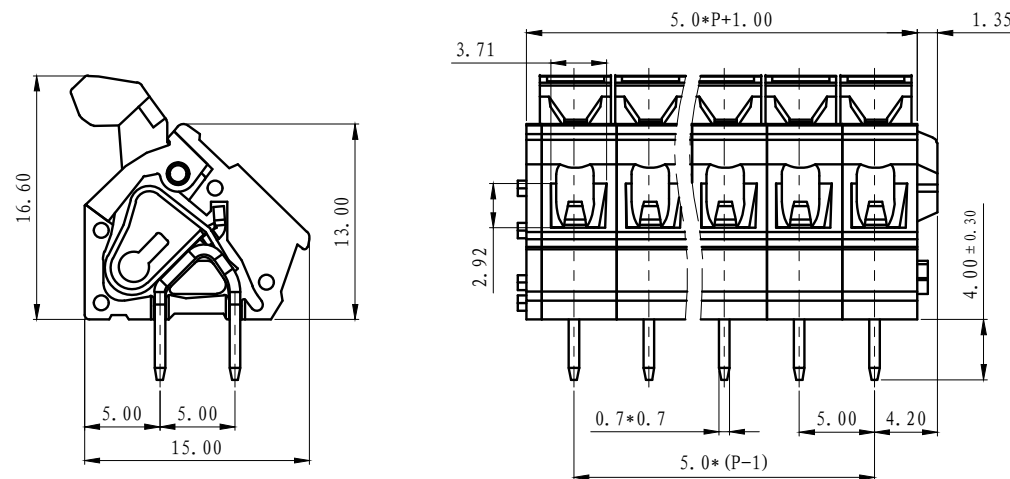

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱
									⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



5	LS243-盖板	3007C0Y01AV	1	PA66-V0	
4	LS243-弹片	F2A0DLS243BV	P	不锈钢	
3	LS243-焊脚	3007B00010V	P	紫铜	镀雾锡
2	LS243-按钮	3007D0Y01AV	P	POM	
1	LS243-5.0-主体	3007A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/2/23	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LS243-5.0-XXP-1Y-00A
					LS243-5.0-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		



NOTES:
Pitch : 7.5mm
Rated Voltage : 300 V
Rated Current : 17 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
-40℃ ~ +105℃
Wire range : 24~14AWG
Stripping length: 6mm


技术要求:
间距: 7.5mm
额定电压: 300V
额定电流: 17A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 24~14AWG
剥线长度: 6mm

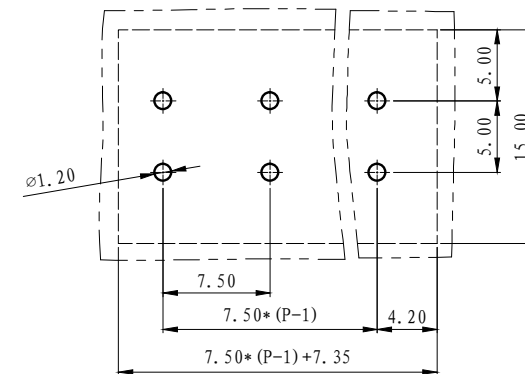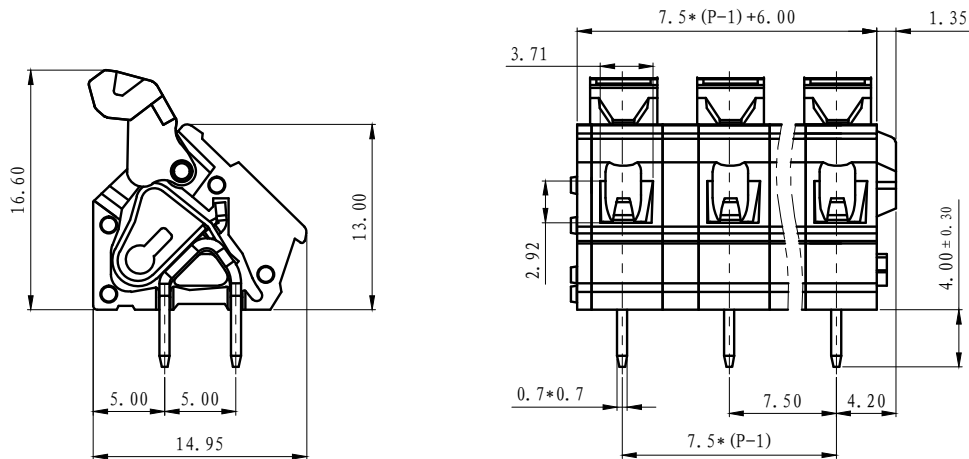

	pitch dimension			Naminal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10




6	LS243-2.5-隔板	3007H0Y02AV	P-1	PA66-V0	
5	LS243-盖板	3007C0Y01AV	1	PA66-V0	
4	LS243-弹片	F2A0DLS243BV	P	不锈钢	
3	LS243-焊脚	3007B00010V	P	紫铜	镀雾锡
2	LS243-按钮	3007D0Y01AV	P	POM	
1	LS243-5.0-主体	3007A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE	2012/2/23	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-3007003
				TITLE	LS243-7.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

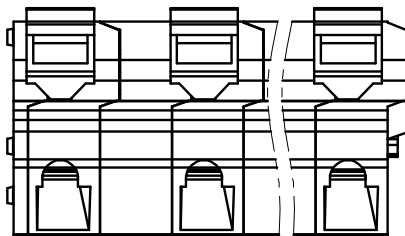

NOTES:
Pitch : 10.0mm
Rated Voltage : 300 V
Rated Current : 17 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
-40℃ ~ +105℃
Wire range : 24~14AWG
Stripping length: 6mm

技术要求:
间距: 10.0mm
额定电压: 300V
额定电流: 17A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 24~14AWG
剥线长度: 6mm

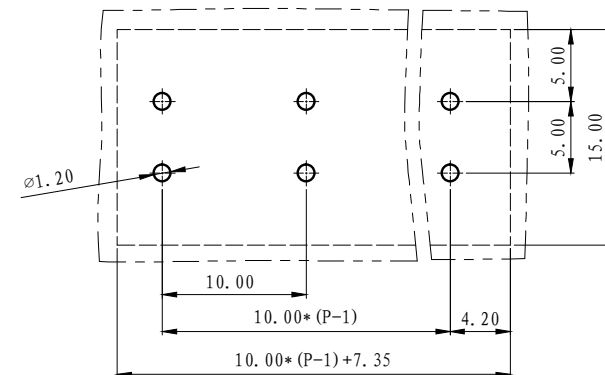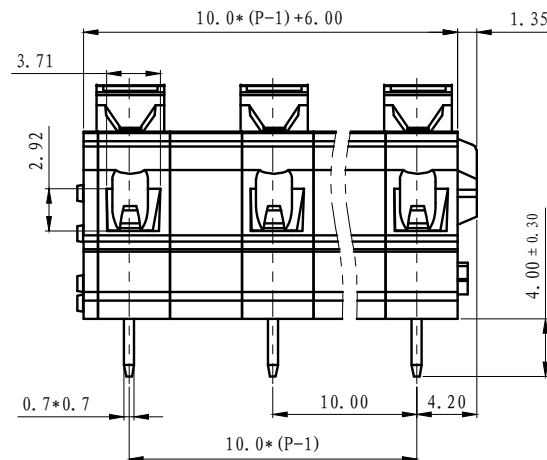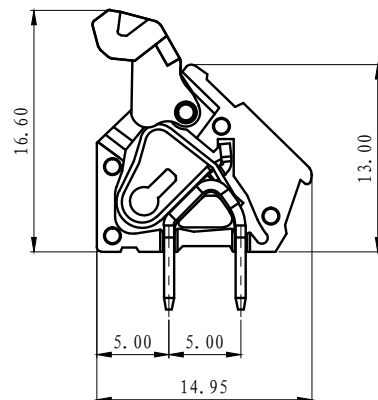

	pitch dimension			Naminal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⌒
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LS243-5.0-隔板	3007H0Y01AV	P-1	PA66-V0	
5	LS243-盖板	3007C0Y01AV	1	PA66-V0	
4	LS243-弹片	F2A0DLS243BV	P	不锈钢	
3	LS243-焊脚	3007B00010V	P	紫铜	镀雾锡
2	LS243-按钮	3007D0Y01AV	P	POM	
1	LS243-5.0-主体	3007A0Y01AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	XLM	DATE 2012/2/23	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO. SP-2-3007002	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD				TITLE	LS243-10.0-XXP-1Y-00A
					LS243-10.0-成品