
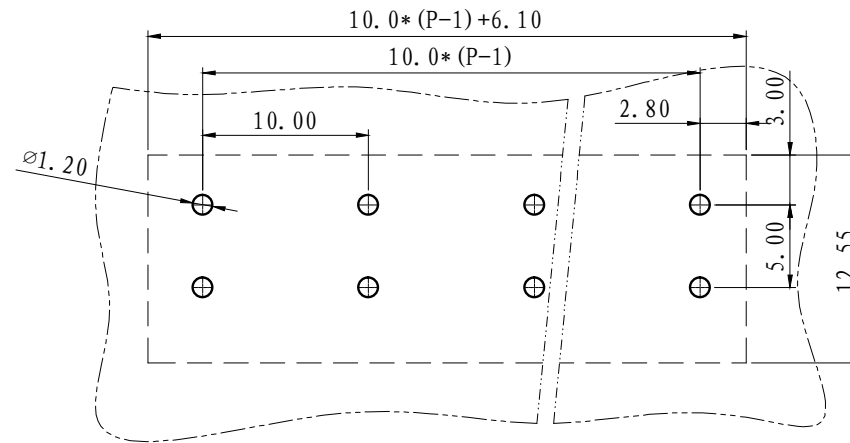


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		


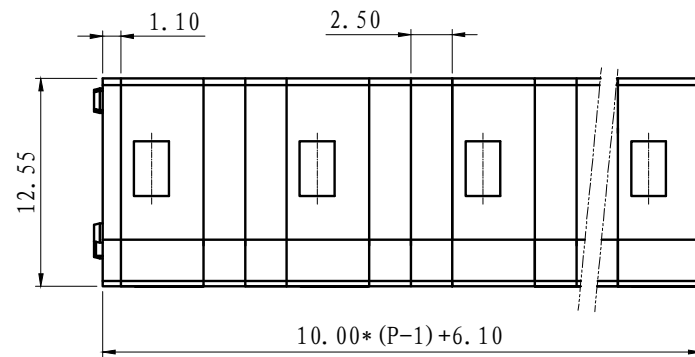


NOTES:

1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 10.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 20-18 AWG
7. Button down pressure range: 28-55N
8. Stripping length: 8-10mm

技术要求:

1. 额定电压: 300V, 额定电流: 10A
2. 间距: 10.0mm
3. 耐压值: AC 2500V/min
4. 绝缘阻抗500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 20-18 AWG
7. 按钮下压力范围为: 28-55N
8. 剥线长度: 8-10mm

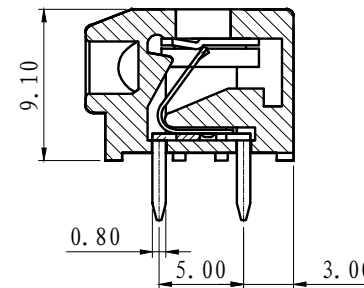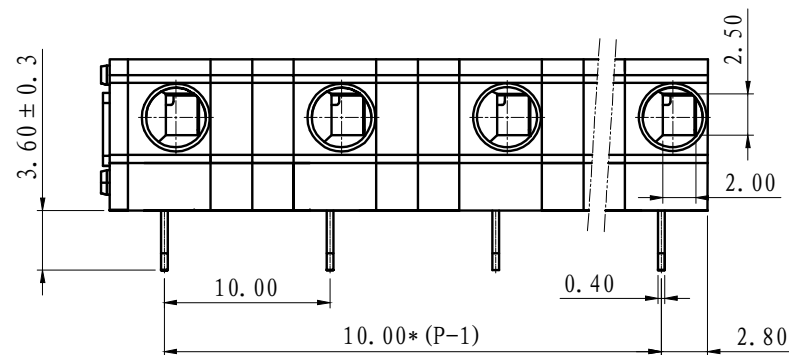

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LS235-焊脚	3001B0001AV	P	磷青铜	镀雾锡
4	LS235-弹片	F2A0DLS235BV	P	SUS301	
3	LS235-盖板	3001C1001AV	1	PA66-V0	
2	LS235-2.5-隔板	3001H1001AV	2*(P-1)	PA66-V0	
1	LS235W-5.0-主体	3013A1001AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE 2011/03/14	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1: 1	DWG NO. SP-2-3013003 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD				TITLE	LS235W-10.0-XXP-1Y-00A
					LS235W-10.0-成品