

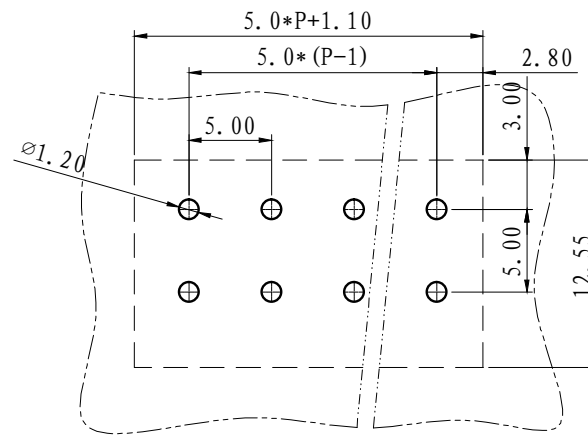
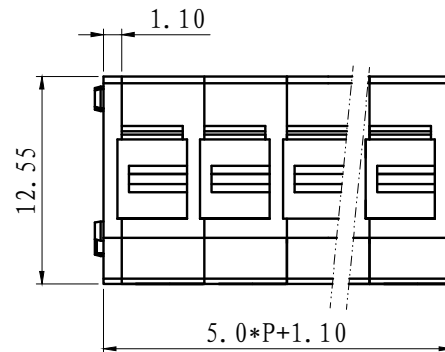


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

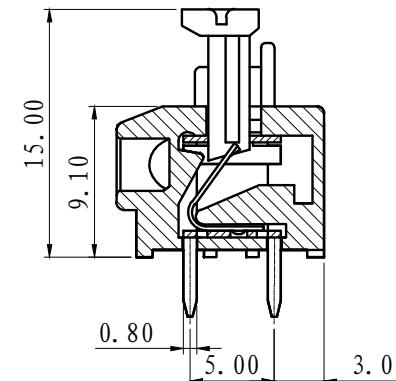

NOTES:


1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 20-18 AWG
7. Button down pressure range: 28-55N
8. Stripping length: 28~55N

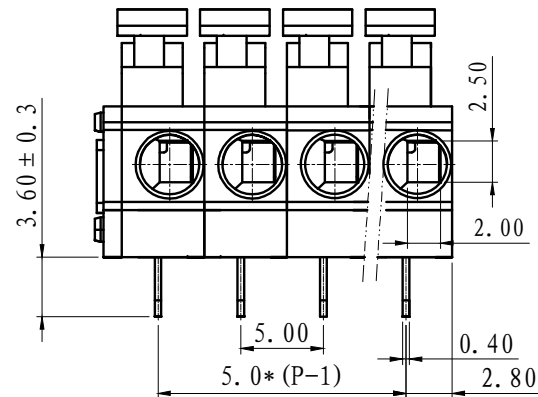

技术要求:


1. 额定电压: 300V, 额定电流: 10A
2. 间距: 5.0mm
3. 耐压值: AC 2500V/min
4. 绝缘电阻: 500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 20-18 AWG
7. 按钮下压力范围为: 28-55N
8. 剥线长度: 8mm ~ 10mm

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		◇ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10



5	LS235-焊脚		3001B0001AV		P	磷青铜	镀雾锡	
4	LS235-弹片		F2A0DLS235BV		P	SUS301		
3	LS235-按钮		3011D0Y01AV		P	POM		
2	LS235-盖板		3001C1001AV		1	PA66-V0		
1	LS235-5.0-主体		3001A1001AV		P	PA66-V0		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	ZD	DATE	21-1-28	UNITS	MM	THIRD ANGLE PROJECTION	SHEET	
CHK.		DATE		SIZE	A4		1 of 1	
APP.		DATE		SCALE	1:1		DWG NO.	SP-2-3001001
 上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD						TITLE	LS235-5.0-XXP-1Y-00A	
							LS235-5.0-成品	

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

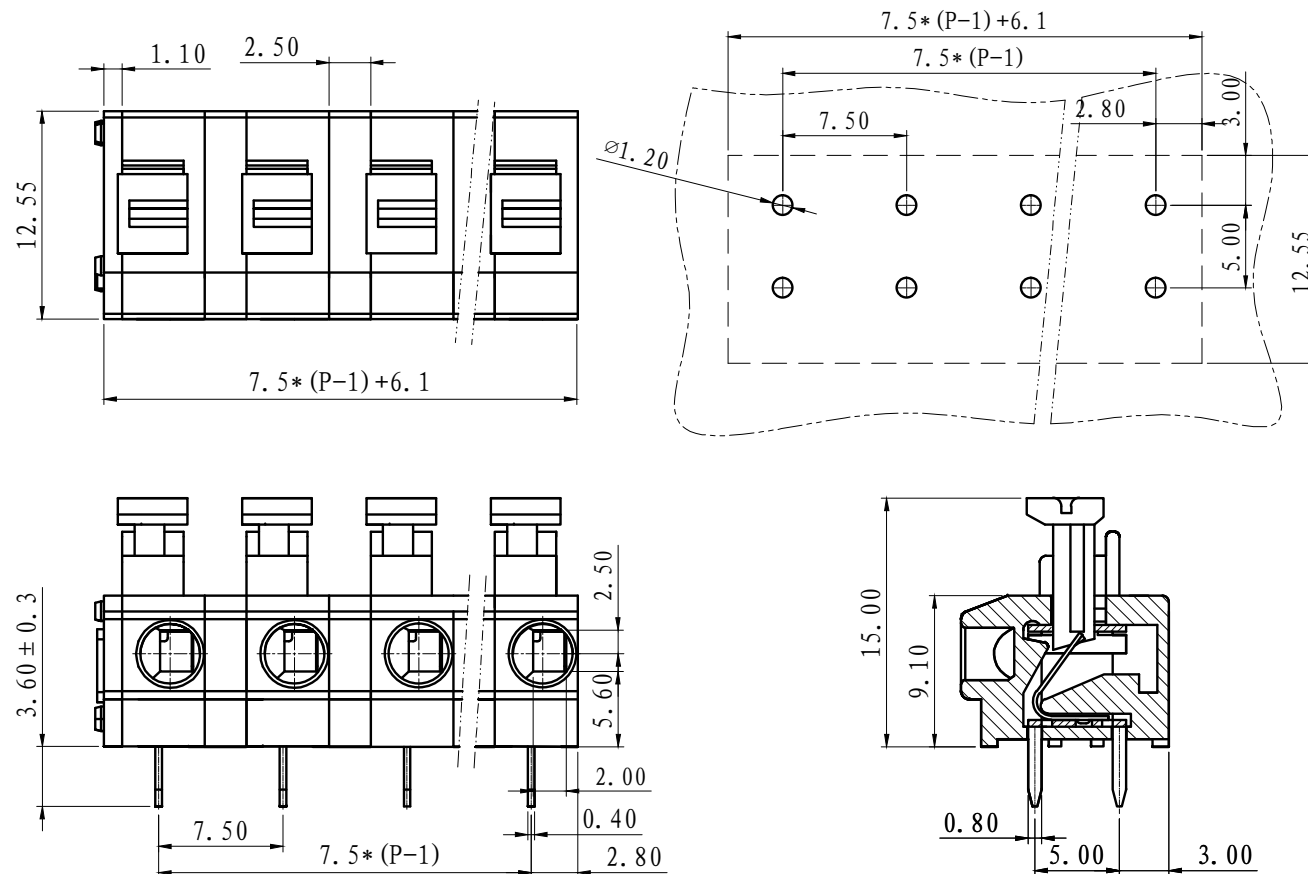

NOTES:

1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 7.5mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 20-18 AWG
7. Button down pressure range: 28-55N
8. Stripping length: 8-10mm





技术要求:

1. 额定电压: 300V, 额定电流: 10A
2. 间距: 7.5mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 20-18 AWG
7. 按钮下压力范围为: 28-55N
8. 剥线长度: 8-10mm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ◇ ○
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LS235-焊脚		3001B0001AV		P	磷青铜	镀雾锡
5	LS235-弹片		F2A0DLS235BV		P	SUS301	
4	LS235-按钮		3011D0Y01AV		P	POM	
3	LS235-盖板		3001C1001AV		1	PA66-V0	
2	LS235-2.5-隔板		3001H1001AV		P-1	PA66-V0	
1	LS235-5.0-主体		3001A1001AV		P	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	ZD	DATE	21-1-28	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1: 1		DWG NO.
 上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD						TITLE	LS235-7.5-XXP-1Y-00A
							LS235-7.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

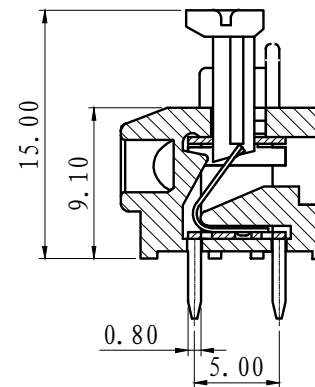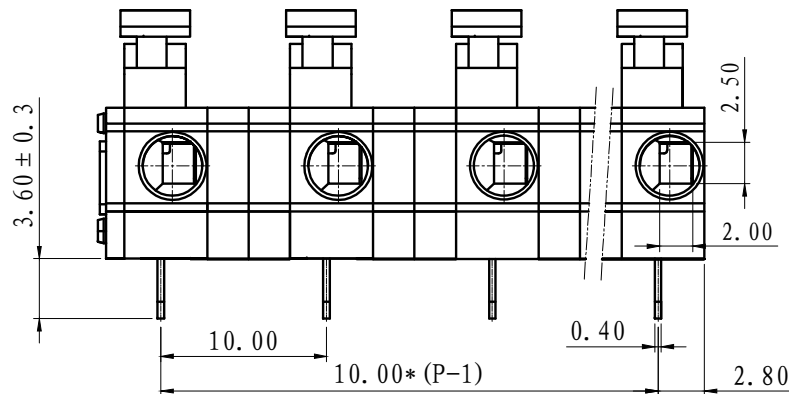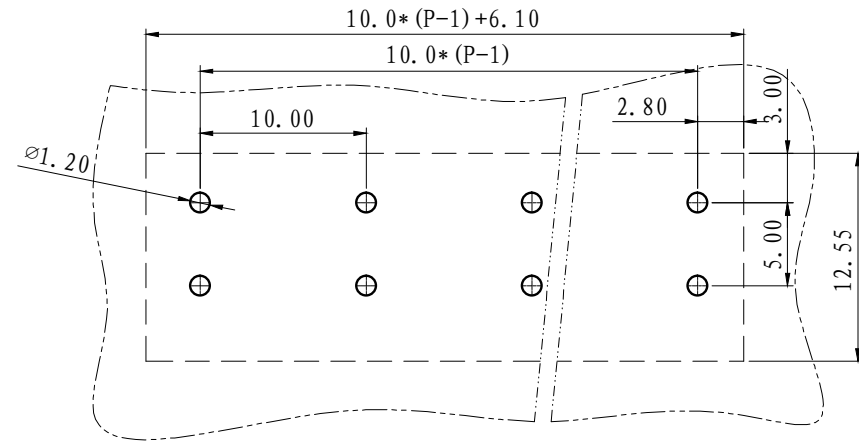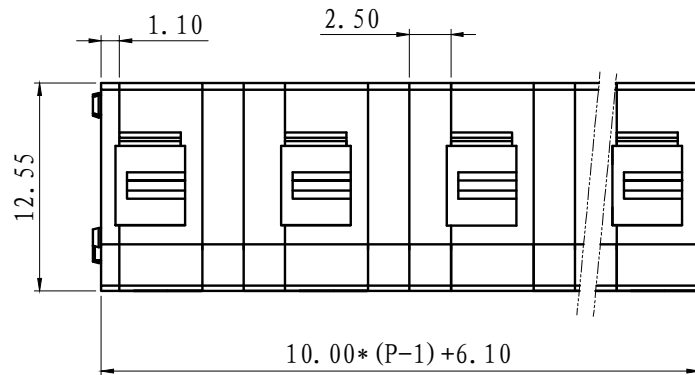

技术要求:

1. 额定电压: 300V, 额定电流: 10A
2. 间距: 10.0mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗500兆欧
5. 使用条件: -40° - +105°
6. 适用线规: 20-18 AWG
7. 按钮下压力范围为: 28-55N
8. 剥线长度: 8-10mm

NOTES:

1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 10.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40° C - +105° C
6. Suitable Electric Wire: 20-18 AWG
7. Button down pressure range: 28-55N
8. Stripping length: 8-10mm

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LS235-焊脚	3001B0001AV	P	磷青铜	镀雾锡
5	LS235-弹片	F2A0DLS235BV	P	SUS301	
4	LS235-按钮	3011D0Y01AV	P	POM	
3	LS235-盖板	3001C1001AV	1	PA66-V0	
2	LS235-2.5-隔板	3001H1001AV	2*(P-1)	PA66-V0	
1	LS235-5.0-主体	3001A1001AV	P	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ZD	DATE	21-1-28	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1: 1
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD				TITLE	LS235-10.0-XXP-1Y-00A
					LS235-10.0-成品