
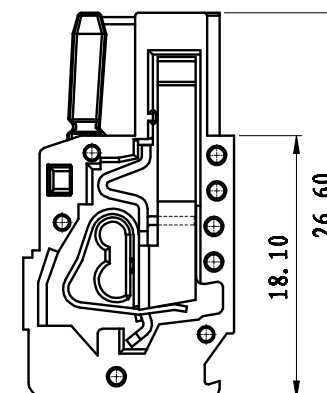


REV.	CONTENT	MOD.	DATE
①	初版发行		


适用线规: 22~ 14AWG

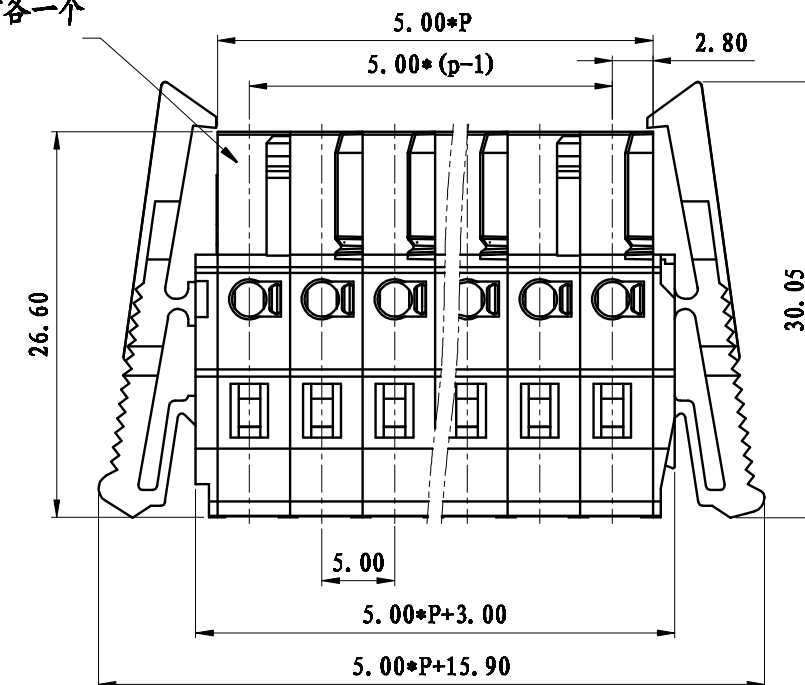

	pitch dimension			Nominal dimension					—
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	 
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LSC1J-5.08-盖板2	1059C0Y01AV	1	PA66	
5	LSC1-5.08-弹片	F2A0DLSLC1BV	P	不锈钢	
4	LSC1-5.08-夹子	1056B0001AV	P	磷青铜	镀镍
3	LSC1J-5.08-盖板1	1061C0Y01AV	1	PA66	
2	LSC1-5.0-中间件	1074A0Y01AV	10-3 14P>3	PA66	
1	LSC1-5.0-边件2	1084A0Y01AV	10-3 12P>3	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/15	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1084002 REV: 70
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LSC1JB-5.0-XP-1Y-00
					LSC1JB-5.0-成品



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

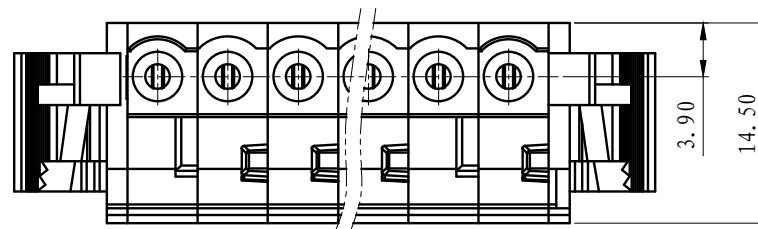

NOTES:
Pitch: 5.08mm
Rated Voltage: 300 V
Rated Current: 15 A
Withstand Voltage:
AC2500V for 1 minute
Insulation Resistance:
500MΩ/DC500V
Using Temperature Range:
-40℃ ~ +105℃
Wire range: 22~ 14AWG
Stripping length: 6mm

技术要求:
间距: 5.08mm
额定电压: 300V
额定电流: 15A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃ ~ +105℃
适用线规: 22~ 14AWG
剥线长度: 6mm

2P, 边件2在左边, 且只有一个
3P, 边件2左右各一个

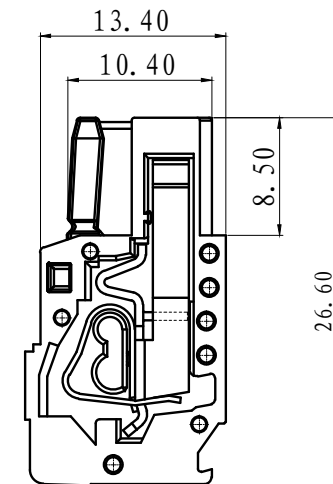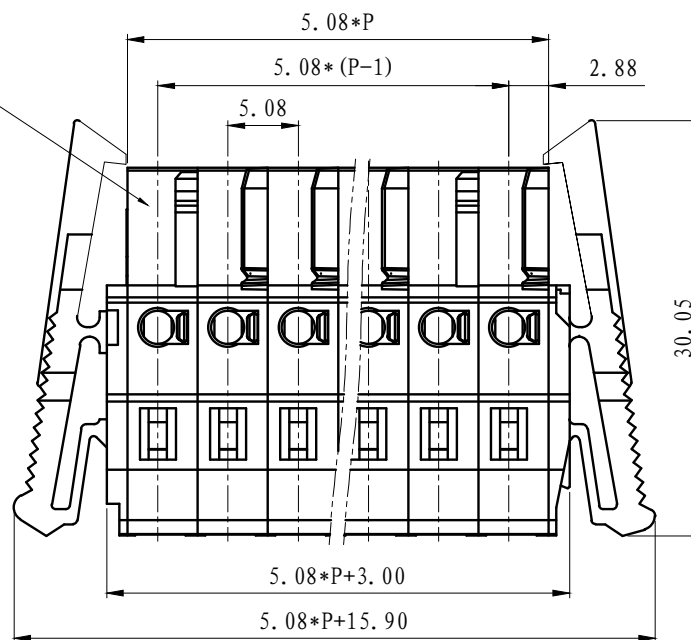

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LSC1J-5.08-盖板2	1059C0Y01AV	1	PA66-V0	
5	LSC1-弹片	F2A0DLSLC1BV	P	不锈钢	
4	LSC1-夹子	1056B0001AV	P	磷青铜	镀镍
3	LSC1J-5.08-盖板1	1061C0Y01AV	1	PA66-V0	
2	LSC1-5.08-中间件	1057A0Y01AV	P-2	PA66-V0	
1	LSC1-5.08-边件2	1058A0Y01AV	2	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/15	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE	DWG NO.	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LSC1JB-5.08-成品