

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

NOTES:

Pitch : 5.0mm

Rated Voltage : 300 V

Rated Current : 15 A

Withstand Voltage :

AC2500V for 1 minute

Insulation Resistance :

500MQ / DC500V

Using Temperature Range :

- 40℃ ~ + 105℃

Wire range : 22~ 14AWG

技术要求:

间距: 5.0mm

额定电压: 300V

额定电流: 15A




耐电压值: AC2500V/min

绝缘阻抗: 500MQ/DC500V

使用条件: -40℃~+105℃

适用线规: 22~ 14AWG

2P, 边件1在左边, 且只有一个
3P, 边件1左右各一个

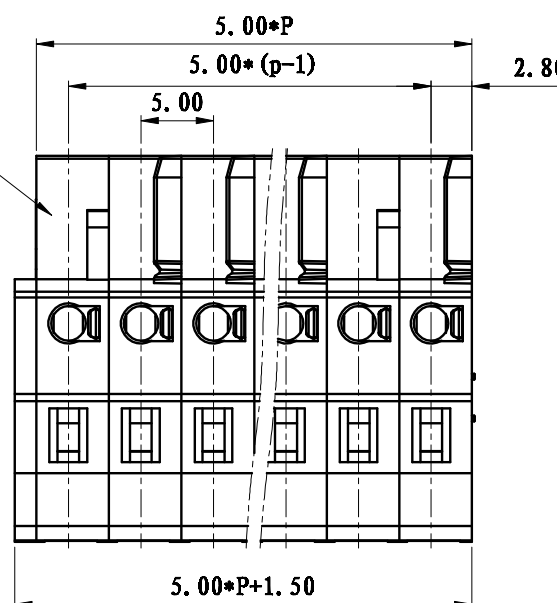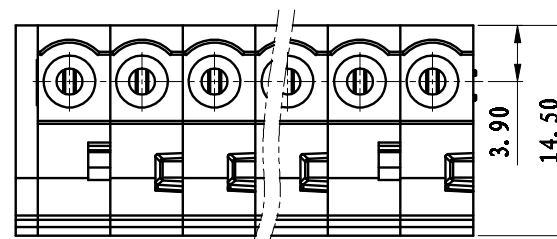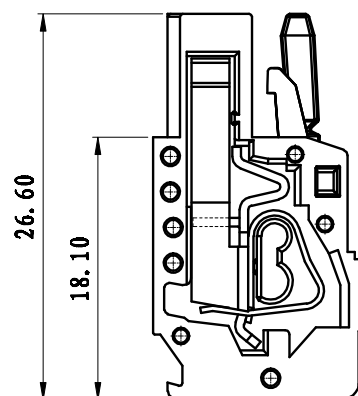

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	—
variable	0	6	10	0	30	60	100	150	□
range	to	to	to	to	to	to	to		○
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LSC1-5.08弹片	F2A0DLSLC1BV	P	不锈钢	
4	LSC1-5.08夹子	1056B0001AV	P	磷青铜	镀镍
3	LSC1-5.08-盖板	1056C0Y01AV	1	PA66	
2	LSC1-5.0-中间件	1074A0Y01AV	10-0 P22.0 3P2.0	PA66	
1	LSC1-5.0-边件1	1073A0Y01AV	10-0 P22.0 3P2.0	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/15	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO. SP-2-1073001	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LSC1-5.0-XXP-1Y-00A LSC1-5.0-成品