



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		

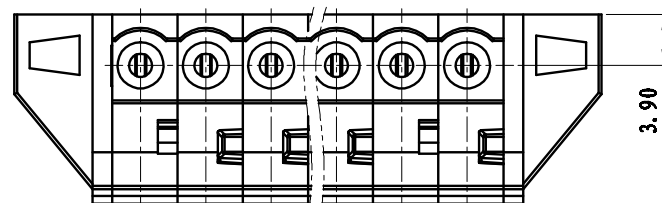


2P, 边件1在左边, 且只有一个
3P, 边件1左右各一个

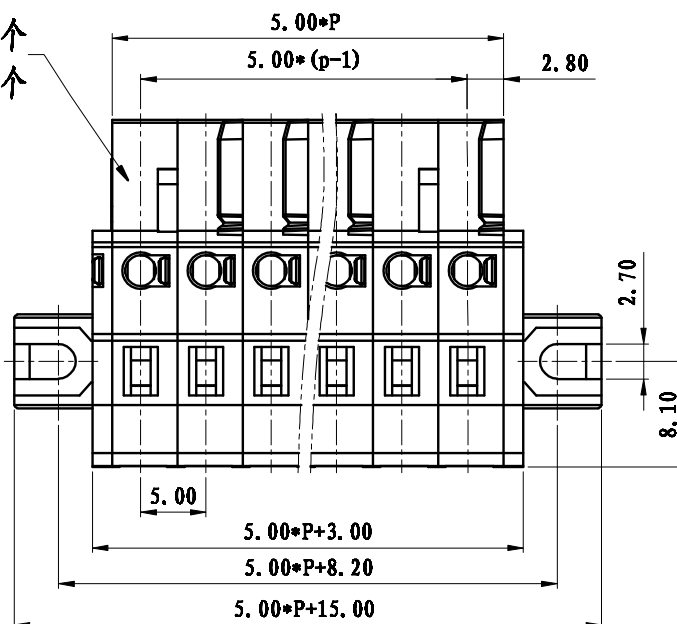

NOTES:
Pitch: 5.0mm
Rated Voltage: 300 V
Rated Current: 15 A
Withstand Voltage:
AC2500V for 1 minute
Insulation Resistance:
500MQ / DC500V
Using Temperature Range:
- 40℃ ~ + 105℃
Wire range: 22~ 14AWG

技术要求:
间距: 5.0mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MQ/DC500V
使用条件: -40℃~+105℃
适用线规: 22~ 14AWG

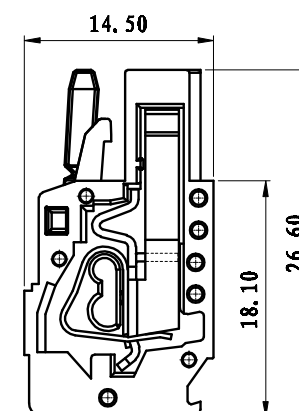

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LSC1-5.08 夹子	1056B0001AV	P	磷青铜	镀镍
5	LSC1-5.08 弹片	F2A0DLSLC1BV	P	不锈钢	
4	LSC1M-5.08-盖板2	1066C0Y01AV	1	PA66	
3	LSC1M-5.08-盖板1	1065C0Y01AV	1	PA66	
2	LSC1-5.0-中同件	1074A0Y01AV	10-0 1-30>9	PA66	
1	LSC1-5.0-边件1	1073A0Y01AV	10-0 20>9	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/15	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO. SP-2-1073003	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LSC1M-5.0-XP-1Y-00A LSC1M-5.0-成品