


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

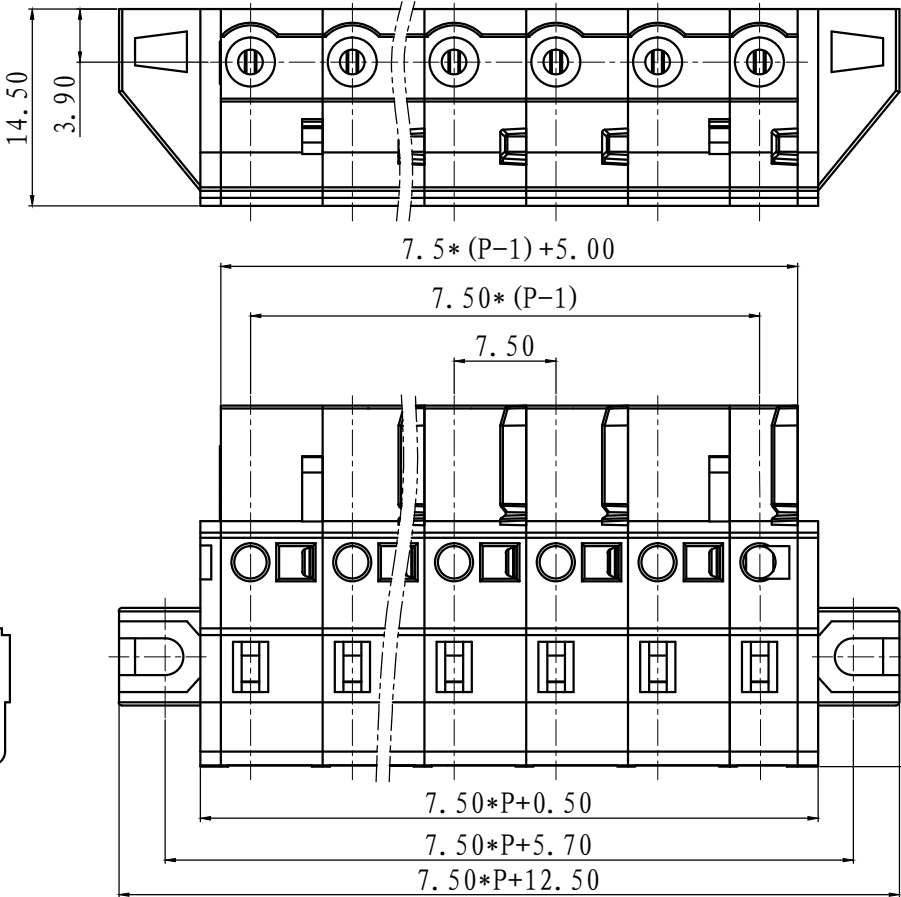

- NOTES:
1. Voltage Rating: 300V, Current Rating: 15A
 2. PITCH: 7.5mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Insulation Resistance: 500MΩ or more at DC500V
 5. Using Temperature Range: -40℃ - +105℃
 6. Suitable Electric Wire: 22-14AWG

- 技术要求:
1. 额定电压：300V，额定电流：15A
 2. 间距：7.5mm
 3. 耐电压值：AC 2500V/min
 4. 绝缘阻抗：500兆欧
 5. 使用条件：-40℃- +105℃
 6. 适用线规：22-14AWG

	pitch dimension			Naminl dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LSC1-夹子	1056B0001AV	P	磷青铜	镀镍
6	LSC1-弹片	F2A0DLSLC1BV	P	不锈钢	
5	LSC1M-5.08-盖板2	1066C0Y01AV	1	PA66	
4	LSC1M-5.08-盖板1	1065C0Y01AV	1	PA66	
3	LSC1-7.5-中间件	1090A0Y01AV	P-3	PA66	
2	LSC1-5.0-中间件	1074A1Y01AV	1	PA66	
1	LSC1-7.5-边件1	1089A0Y01AV	2	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/15	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.	DATE	SIZE A4			1 of 1
APP.	DATE	SCALE 1:1	DWG NO.	SP-2-1089002	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LSC1M-7.5-XXP-1Y-00A LSC1M-7.5-成品