



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		

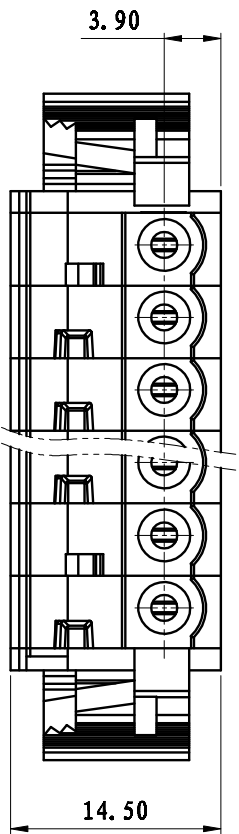


2P, 边件1在左边, 且只有一个
3P, 边件1在左右各一个

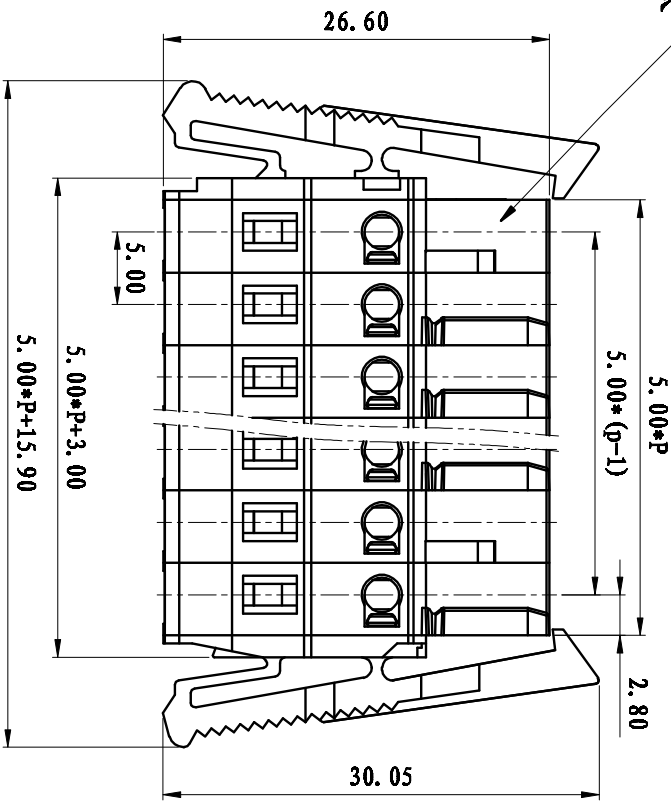

NOTES:
Pitch : 5.0mm
Rated Voltage : 300 V
Rated Current : 15 A
Withstand Voltage : AC2500V for 1 minute
Insulation Resistance : 500MΩ / DC500V
Using Temperature Range : -40℃ ~ + 105℃
Wire range : 22~14AWG

技术要求:
间距: 5.0mm
额定电压: 300V
额定电流: 15A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 22~14AWG

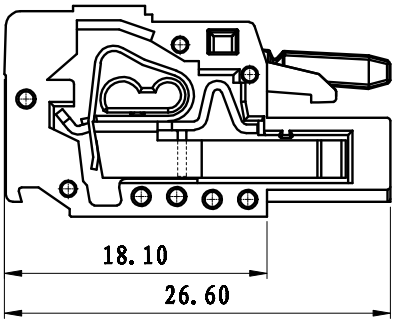

	pitch dimension			Nominal dimension						
	over	over	over	over	over	over	over	over	over	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150			
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

6	LSC1J-5.08-盖板2	1059C0Y01AY	1	PA66	
5	LSC1-5.08弹片	F2ANDLSC1BY	P	不锈钢	
4	LSC1-5.08夹子	1056B0001AY	P	磷青铜	镀镍
3	LSC1J-5.08-盖板1	1061C0Y01AY	1	PA66	
2	LSC1-5.0-中间件	1074A0Y01AY	1060 14123 1023	PA66	
1	LSC1-5.0-边件1	1073A0Y01AY	1060 14123 1023	PA66	
THIRD ANGLE PROJECTION					
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LMD	DATE	2012/08/15	UNITS	mm
CHK.	DATE	SIZE	A4		
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-1073002
上海联捷电气有限公司					TITLE
Shanghai Einker Electric CO.,LTD					LSC1J-5.0-XXP-1T-00A
					LSC1J-5.0-成品