



| REVISION RECORD |         |      |      |
|-----------------|---------|------|------|
| REV.            | CONTENT | MOD. | DATE |
| △               | 初版发行    |      |      |

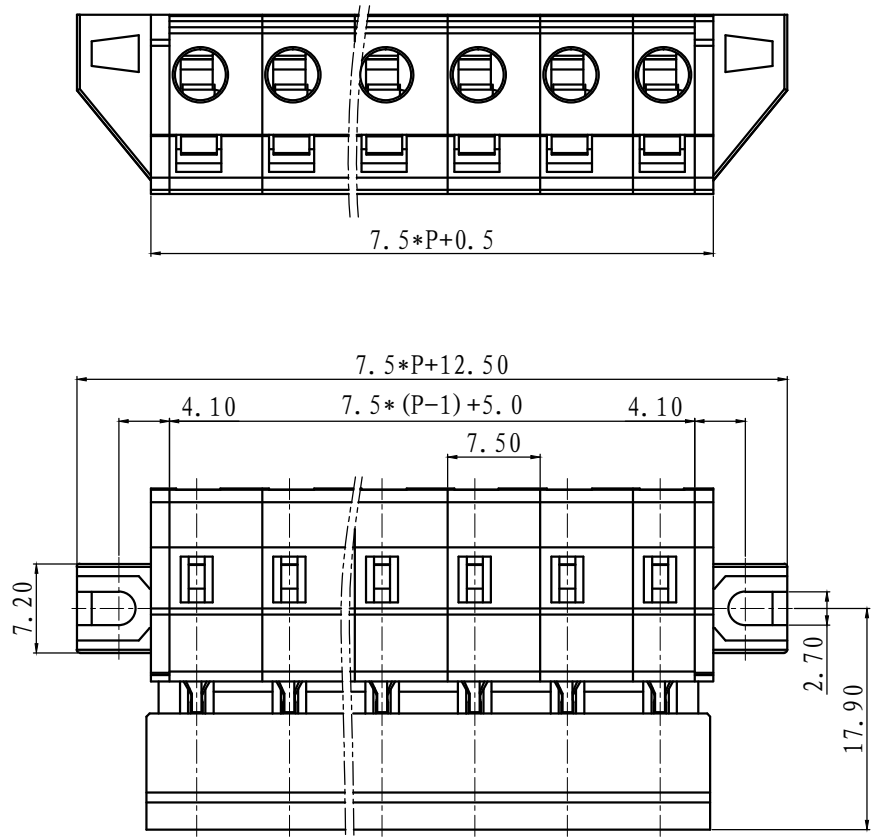

NOTES:

1. Voltage Rating: 400V, Current Rating: 20A
2. PITCH: 7.50mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -40℃ - +105℃
6. Suitable Electric Wire: 22-14AWG

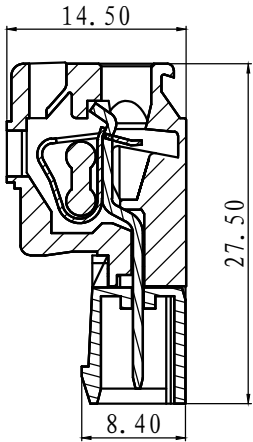

技术要求:

1. 额定电压: 400V, 额定电流: 20A
2. 间距: 7.50mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗: 500兆欧
5. 使用条件: -40℃ - +105℃
6. 适用线规: 22-14AWG

|           | pitch dimension |                 |                  | Nominal dimension |                  |                   |                    |      | —<br><br> |
|-----------|-----------------|-----------------|------------------|-------------------|------------------|-------------------|--------------------|------|-----------|
|           | over 0<br>to 6  | over 6<br>to 10 | over 10<br>to 24 | over 0<br>to 30   | over 30<br>to 60 | over 60<br>to 100 | over 100<br>to 150 |      |           |
| Tolerance | ±0.1            | ±0.15           | ±0.25            | ±0.2              | ±0.3             | ±0.5              | ±0.7               | ±1.0 | 0.05/10   |

| 7                                               | LSC10-7.5-本体    | 1097A0Y01AV     | P-1      | PA66                   |                                        |
|-------------------------------------------------|-----------------|-----------------|----------|------------------------|----------------------------------------|
| 6                                               | LSC10-方针        | 1062B00010V     | P        | 黄铜                     | 镀雾锡                                    |
| 5                                               | LSC1-弹片         | F2A0DLSLC1BV    | P        | 不锈钢                    |                                        |
| 4                                               | LSZ10-7.5-主体    | 1095A0YXXAV     | 1        | PA66                   |                                        |
| 3                                               | LSC10M-5.08-盖板2 | 1064C0Y01AV     | 1        | PA66                   |                                        |
| 2                                               | LSC10M-5.08-盖板1 | 1063C0Y01AV     | 1        | PA66                   |                                        |
| 1                                               | LSC10-5.0-本体    | 1069A0Y01AV     | 1        | PA66                   |                                        |
| NO.                                             | NAME OF PART    | NO. OF PART     | Q'TY     | MATERIAL               | NOTES                                  |
| DES.                                            | LDD             | DATE 2013/02/21 | UNITS mm | THIRD ANGLE PROJECTION |                                        |
| CHK.                                            |                 | DATE            | SIZE A4  |                        | SHEET 1 of 1                           |
| APP.                                            |                 | DATE            | SCALE    | DWG NO.                | SP-2-1095001 REV: V0                   |
| 上海联捷电气有限公司<br>Shanghai Elinker Electric CO.,LTD |                 |                 |          | TITLE                  | LSC10M-7.5-XXP-1Y-00A<br>LSC10M-7.5-成品 |