
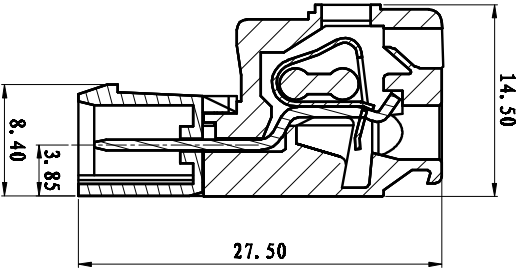
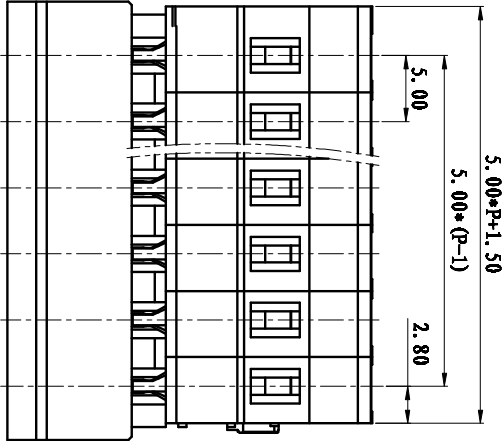


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		

技术要求:

间距: 5.0mm
额定电压: 300V
额定电流: 15A
 withstand Voltage : AC2500V for 1 minute
Insulation Resistance : 500MΩ / DC500V
Using Temperature Range : -40℃ ~ +105℃
Wire range : 22~14AWG

绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 22~14AWG

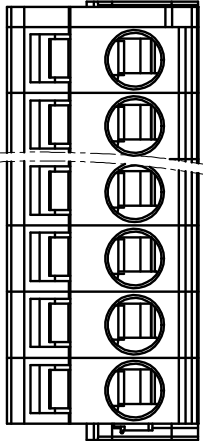

	pitch dimension			Nominal dimension				
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	
variable range	6	10	24	30	60	100	150	()
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10

5	LSC10-方针	1062B0001AY	P	黄铜	镀雾锡
4	LSC1-裸片	F2A0DLSL1BV	P	不锈钢	
3	LS210-5-0-主体	1070A0VXXAY	1	PA66	
2	LSC10-5-0B-盖板	1062C0T01AY	1	PA66	
1	LSC10-5-0-本体	1069A0T01AY	P	PA66	
NO. NAME OF PART		NO. OF PART	QTY	MATERIAL	
DES.	LMD	DATE	2012/08/15	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
		DWG NO.	THIRD ANGLE PROJECTION		
		SP-2-1070002	SHEET		
			1 of 1		
			REV: V0		
			LS210-5-0-1XP-1T-00A		
			LS210-5-0-成品		