
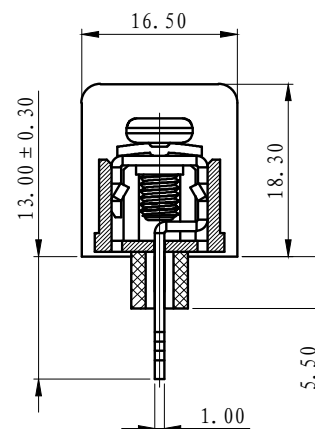
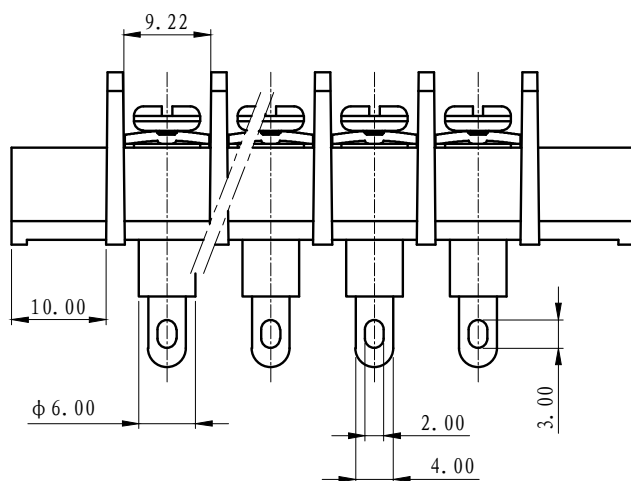
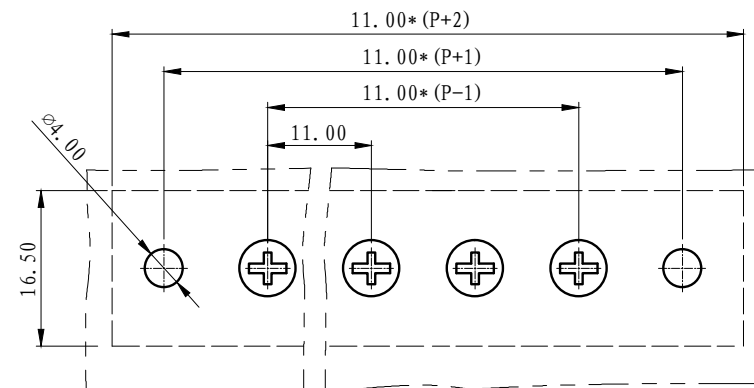


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

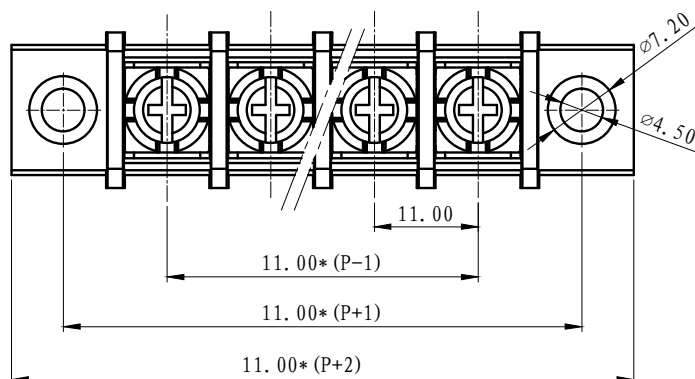

NOTES:

Pitch : 11.0mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

技术要求:

间距: 11.0mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	pitch dimension			Naminl dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW-圆柱	5034A0Y01AV	P	PA66	
3	LW1Q-11.0焊脚	5008B0003AV	P	黄铜	镀雾锡
2	M4*8-9*9螺丝	SQFFA408062V	P	碳钢	三价铬钝化彩锌
1	LW1M-11.0-本体	5008M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ZGC	DATE 2021/02/24	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1: 1	DWG NO. SP-1-5008022 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LW1MQJ-11.0-XXP-1Y-00A LW1MQJ-11.0-成品