
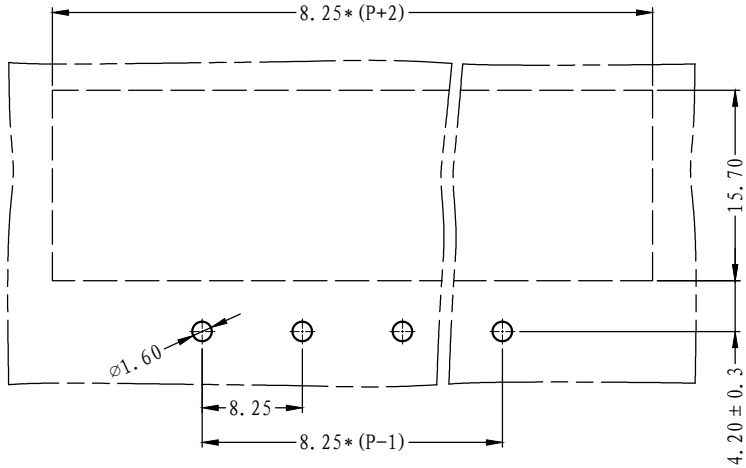
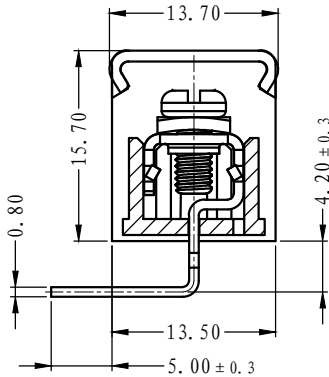
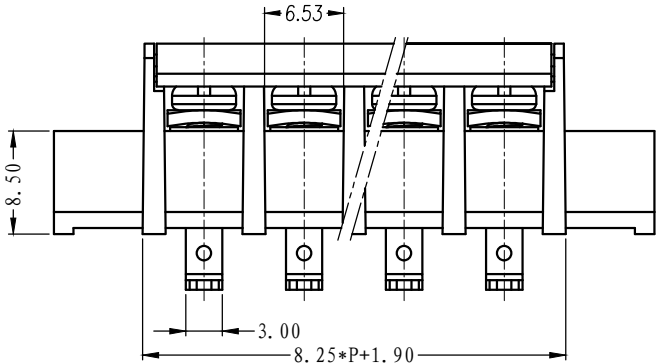


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

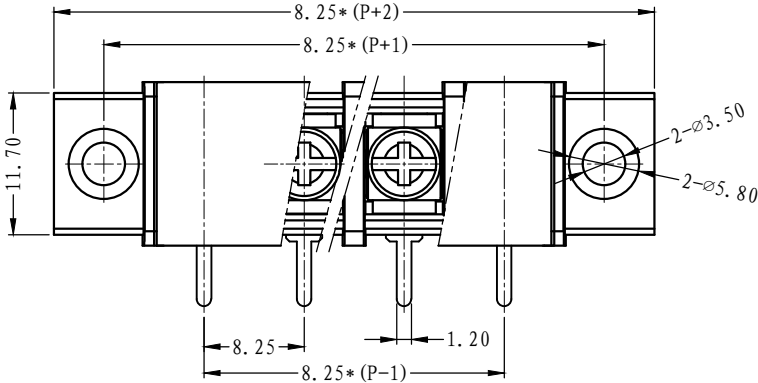

NOTES:

Pitch : 8.25mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22~12 AWG
Screw Torque Value : 0.5Nm

技术要求:

间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐压值: AC2500V/min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Naminal dimension					—  
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW2-7.62-盖板	5021C0YXXAV	1	PC	
3	M3*6-6*6	SQFFA306023V	P	碳钢	三价铬钝化彩锌
2	LW1R-7.62-焊脚	5010B0004AV	P	黄铜	镀雾锡
1	LW2M-8.25-本体	5017M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE 11-05-10	UNITS	MM	THIRD ANGLE PROJECTION SHEET
CHK.		DATE	SIZE	A4	 1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-5017008 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD				TITLE	LW2MR-8.25-XXP-1Y-00A LW2MR-8.25-成品