
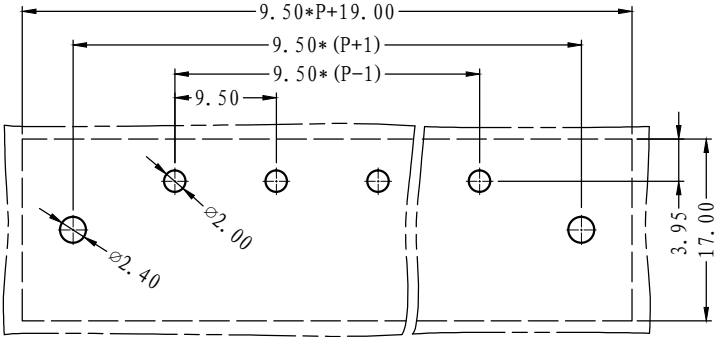
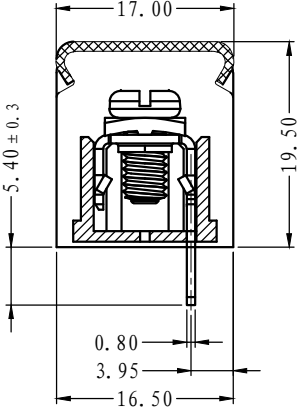
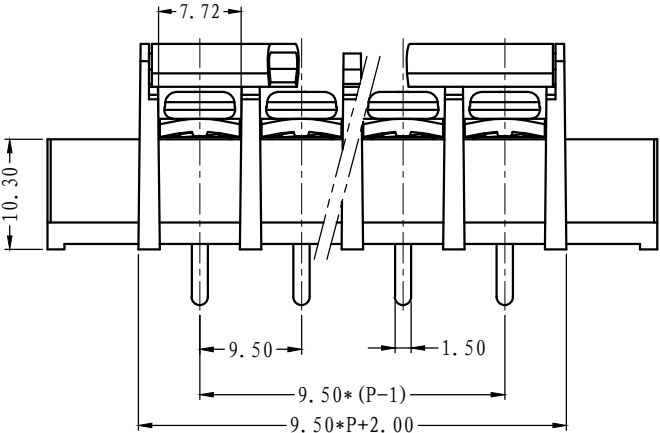


| REVISION RECORD |         |      |      |
|-----------------|---------|------|------|
| REV.            | CONTENT | MOD. | DATE |
| △               | 初版发行    |      |      |

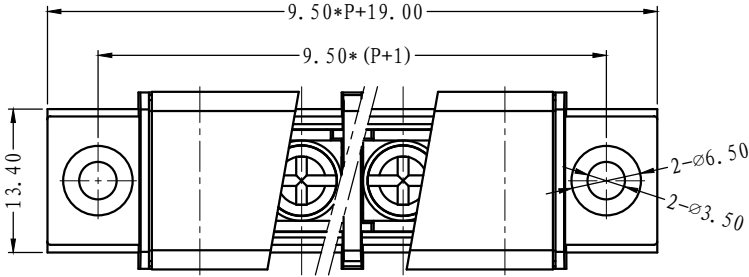

NOTES:  
Pitch : 9.5mm  
Rated Voltage : 300V  
Rated Current : 20 A  
Withstand Voltage :  
AC2500V for 1 minute  
Insulation Resistance :  
1000MΩ / DC500V  
Using Temperature Range :  
- 40℃ ~ + 130℃  
Wire range : 22~12 AWG  
Screw Torque Value : 1.2Nm

技术要求:  
间距: 9.5mm  
额定电压: 300V  
额定电流: 20A  
耐电压值: AC2500V/min  
绝缘阻抗: 1000MΩ/DC500V  
使用条件: -40℃~+130℃  
适用线规: 22~12 AWG  
螺丝扭矩: 1.2Nm

|                | Pitch dimension |        |         | Nominal dimension |         |         |          |          |                                                                                     |
|----------------|-----------------|--------|---------|-------------------|---------|---------|----------|----------|-------------------------------------------------------------------------------------|
| variable range | over 0          | over 6 | over 10 | over 0            | over 30 | over 60 | over 100 | over 150 |  |
|                | to 6            | to 10  | to 24   | to 30             | to 60   | to 100  | to 150   |          |  |
| Tolerance      | ±0.1            | ±0.15  | ±0.25   | ±0.2              | ±0.3    | ±0.5    | ±0.7     | ±1.0     | 0.05/10                                                                             |

| 4                                                                                                                                     | LW2-9.5-盖板   | 5013C0YXXAV   | 1     | PC       |                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------|-------|----------|----------------------------------------------------------------------------------------------|
| 3                                                                                                                                     | LW1B-9.5-焊脚  | 5002B0002AV   | P     | 黄铜       | 镀雾锡                                                                                          |
| 2                                                                                                                                     | M4*8-7.5*7.5 | SQFFA408043V  | P     | 碳钢       | 三价铬钝化彩锌                                                                                      |
| 1                                                                                                                                     | LW2M-9.5-本体  | 5013M0YXXAV   | 1     | PBT      |                                                                                              |
| NO.                                                                                                                                   | NAME OF PART | NO. OF PART   | Q' TY | MATERIAL | NOTES                                                                                        |
| DES.                                                                                                                                  | ARKINE       | DATE 11/03/23 | UNITS | MM       | THIRD ANGLE PROJECTION                                                                       |
| CHK.                                                                                                                                  |              | DATE          | SIZE  | A4       |  1 of 1 |
| APP.                                                                                                                                  |              | DATE          | SCALE | 1:1      | DWG NO. SP-2-5013006 REV: V0                                                                 |
|  上海联捷电气有限公司<br>Shanghai Elinker Electric C.O,LTD |              |               |       | TITLE    | LW2MB-9.5-XXP-1Y-00A<br>LW2MB-9.5-成品                                                         |