

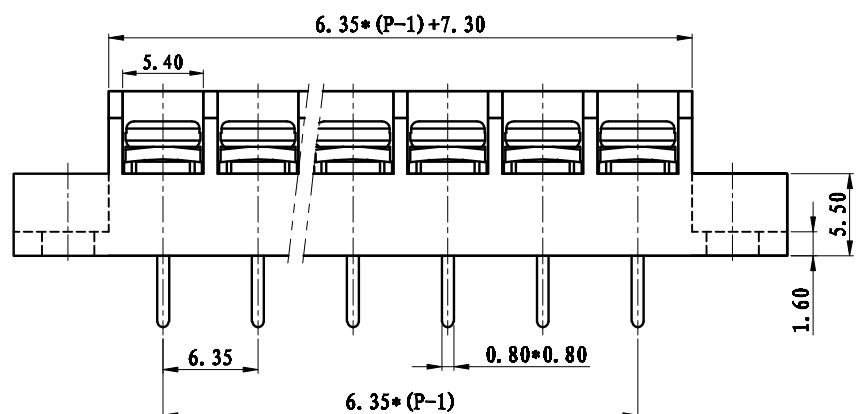
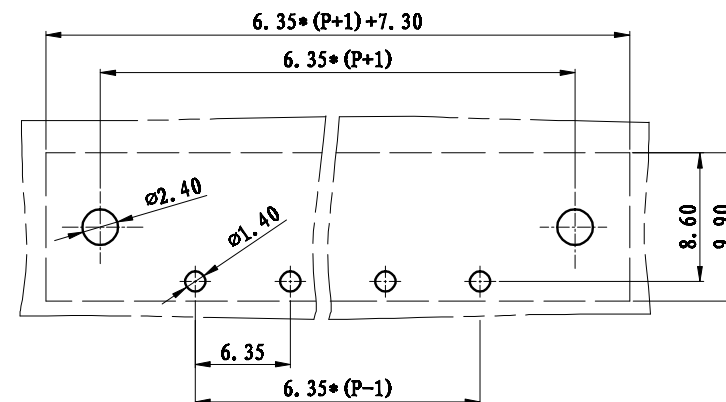


REV.	CONTENT	MOD.	DATE
0	初版发行		

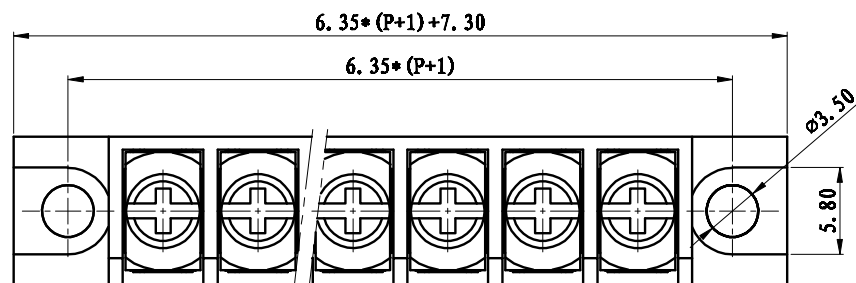

NOTES:
Pitch: 0.35mm
Rated Voltage: 300V
Rated Current: 15A
Withstand Voltage:
AC3500V for 1 minute
Insulation Resistance:
500MΩ / DC500V
Using Temperature Range:
-40°C ~ +130°C
Wire range: 22-14 AWG
Screw Torque Value: 0.4Nm

技术要求:
 间距: 6.35mm
 额定电压: 300V
 额定电流: 15A
 额定电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+130℃
 适用线制: 22~14 AWG
 额定阻抗: 0.4Ω

	pitch dimension			Nominal dimension					—
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	 
	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M2. 5-5-5. 2-5. 2	SPFFA2550A1V	P	碳钢	三价钝化材料	
2	LW3-6. 35-焊脚	5016B0001AV	P	黄铜	镀锡层	
1	LW3M-6. 35-本体	5016M07XXAV	1	PBT		
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	11-06-20	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	 SHEET
APP.		DATE		SCALE	1:1	DWG NO. SP-2-5016005 REV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric Co., Ltd					TITLE	
					LW3MA-6. 35-XXP-1Y-00. LW3MA-6. 35-成品	