

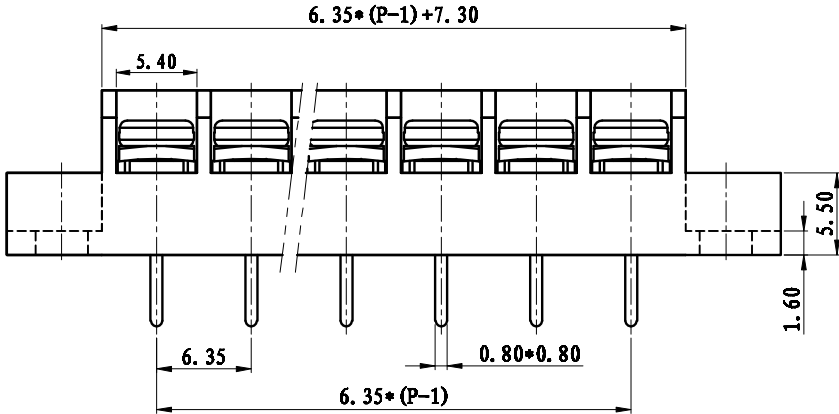
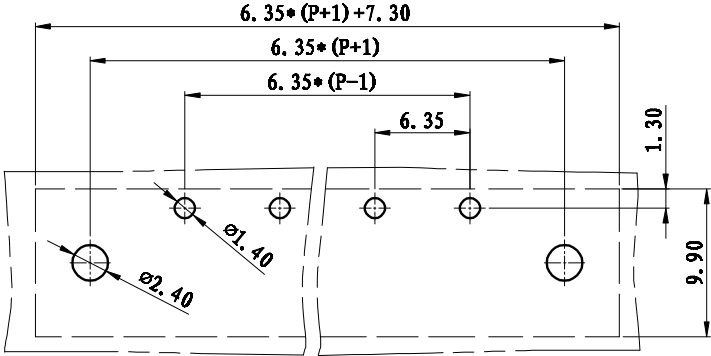


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
0	初版发行		

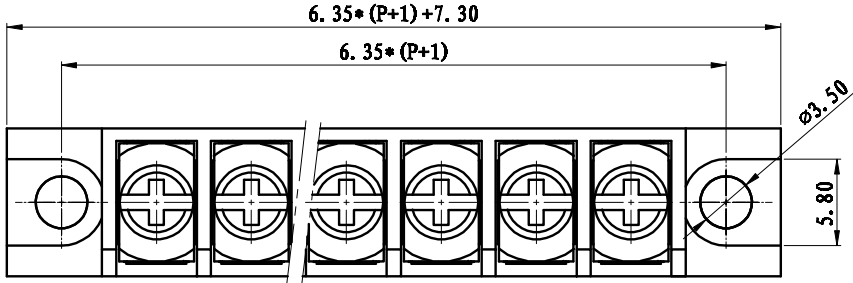

NOTES:
Pitch : 6.35mm
Rated Voltage : 300V
Rated Current : 15A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MQ / DC500V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22~14 AWG
Screw Torque Value : 0.4Nm

技术要求:
间距: 6.35mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MQ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
螺丝扭矩: 0.4Nm

	pitch dimension			Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M2. 5*5-5.2*5.2		SPFFA2550A1V		P	碳钢	三价铬钝化零件	
2	LW3-6.35-焊脚		5016B0001AV		P	黄铜	镀锡层	
1	LW3M-6.35-本体		5016M0YXXAV		1	PBT		
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	11-06-20	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-5016006	REV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric C O.,LTD						TITLE	LW3MB-6.35-XP-1Y-00A	
							LW3MB-6.35-成品	