
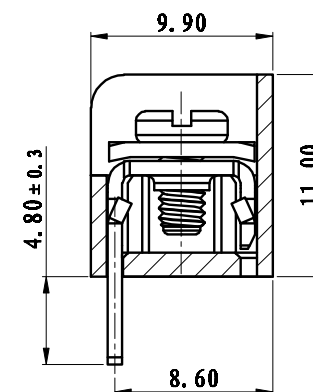
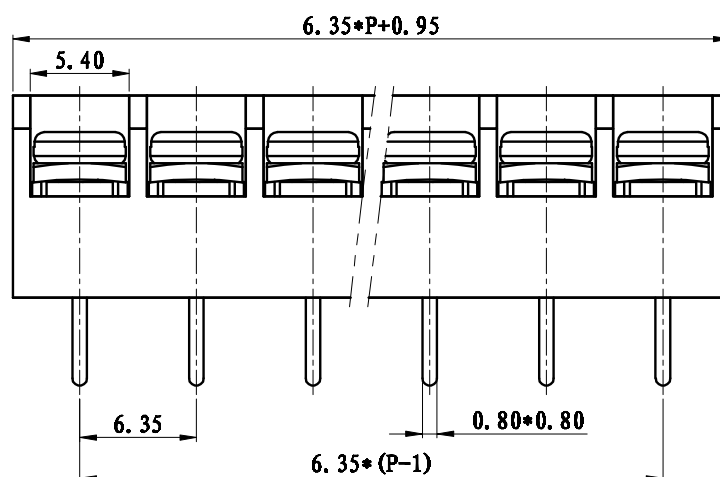




技术要求:
间距: 6.35mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
捆扎扭矩: 0.4Nm

3	M2.5*5-5.2*5.2		SPFFA2550A1V		P	碳钢	三价铬钝化彩锌	
2	LW3-6.35-焊脚		5016B0001AV		P	黄铜	镀雾锡	
1	LW3-6.35-本体		5016A0YXXAV		1	PBT		
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	11-06-20	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-5016003	REV: 00
 上海联捷电气有限公司 Shanghai Bliker Electric Co., LTD						TITLE	LW3A-6.35-XP-1Y-00A	
							LW3A-6.35-成品	