
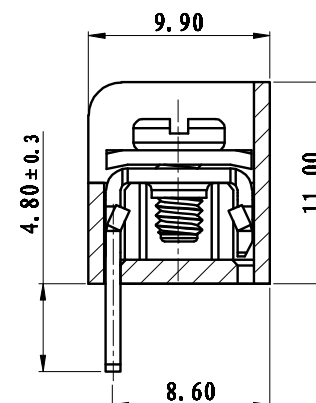
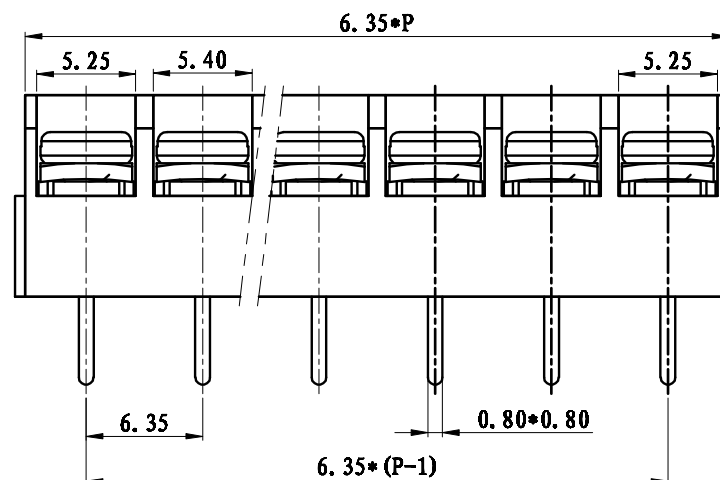




技术要求:
间距: 6.35mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
熔丝规格: 8.4KmA

	pitch dimension			Nominal dimension					—
variable range	over	over	over	over	over	over	over	over	 
	0	6	10	0	30	60	100	150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M2. 5*5-5. 2*5. 2		SPFFA2550A1V		P	碳钢	三价铬钝化彩锌	
2	LW3-6. 35-焊脚		5016B0001AV		P	黄铜	镀镍锡	
1	LW3P-6. 35-本体		5016A0VXXAVP		1	PBT		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	11-06-20	UNITS	MM	THIRD ANGLE PROJECTION	SHEET	
CHK.		DATE		SIZE	A4		1 of 1	
APP.		DATE		SCALE	1: 1	DWG NO.	SP-2-5016001	REV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric C O., LTD						TITLE	LW3PA-6. 35-XP-17-00	
							LW3PA-6. 35-成品	