
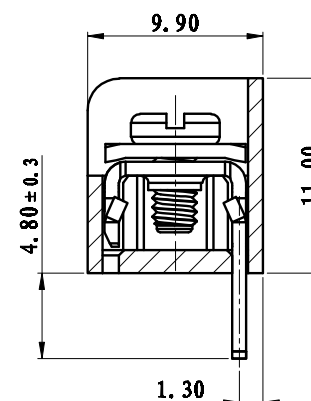
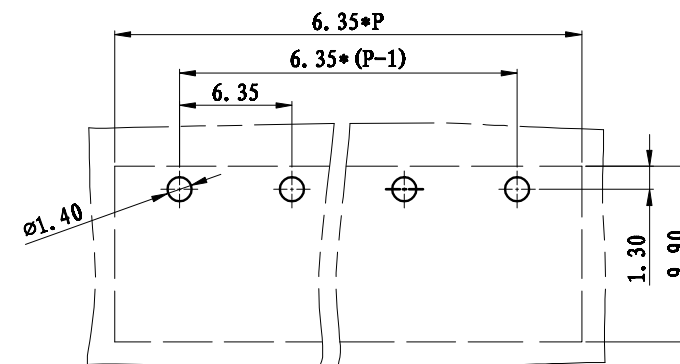
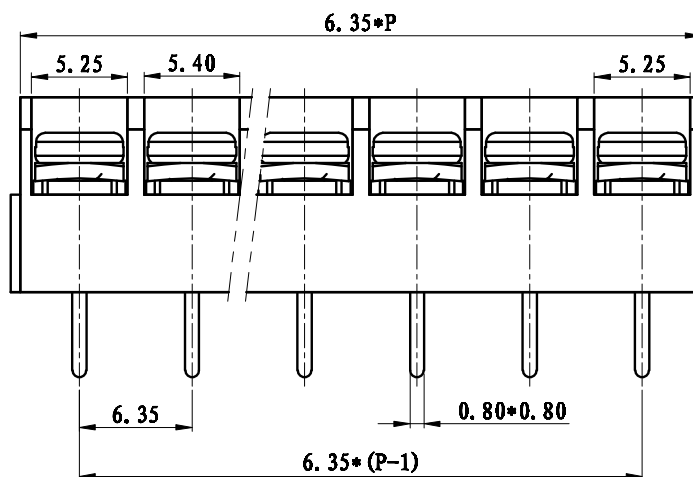



REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
0	初版发行		

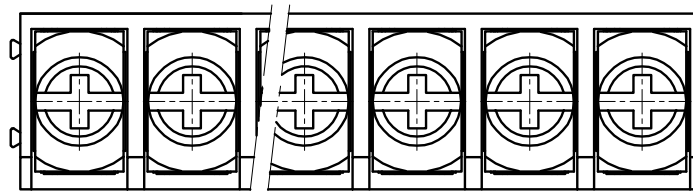

NOTES:
 Pitch: 6.35mm
 Rated Voltage: 300V
 Rated Current: 15A
 Withstand Voltage:
 AC2500V for 1 minute
 Insulation Resistance:
 500MΩ / DC500V
 Using Temperature Range:
 -40℃ ~ +130℃
 Wire range: 22~14 AWG
 Screw Torque Value: 0.4Nm

技术要求:
 间距: 6.35mm
 额定电压: 300V
 额定电流: 15A
 耐压值: AC2500V/min
 绝缘电阻: 500MΩ/DC500V
 使用条件: -40℃~+130℃
 适用线规: 22~14 AWG
 螺丝扭矩: 0.4Nm

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M2. 5*5-5. 2*5. 2		SPFFA2550A1V		P	碳钢	三价铬钝化彩锌	
2	LW3-6. 35-焊脚		5016B0001AV		P	黄铜	镀锡层	
1	LW3P-6. 35-本体		5016A0YXXAVP		1	PBT		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	ARKINE	DATE	11-06-20	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1: 1	DWG NO.	SP-2-5016002	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O., LTD						TITLE	LW3PB-6. 35-XP-1Y-00A	
							LW3PB-6. 35-成品	