



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

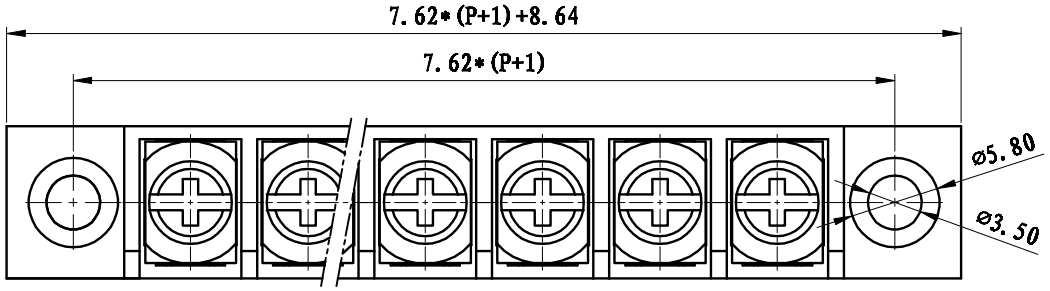

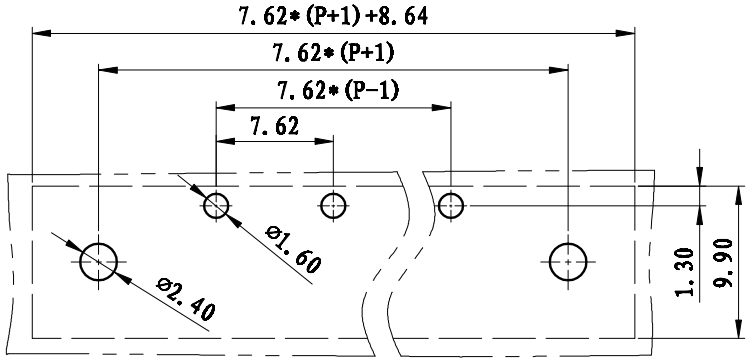

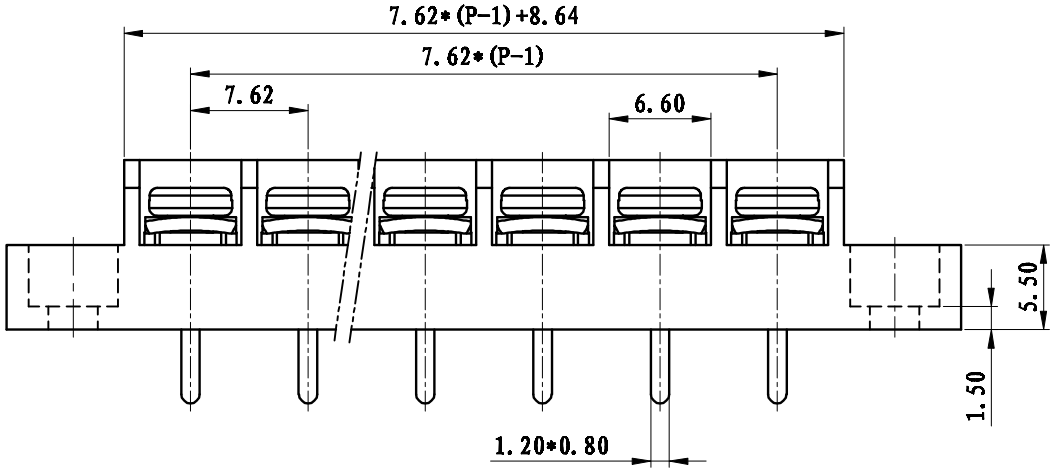

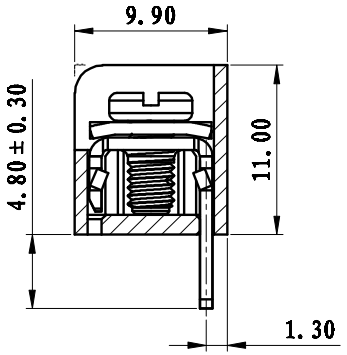

NOTES:
1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 7.62mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance:500MΩ or more at DC500V
5. Using Temperature Range:-40℃ ~+130℃
6. Suitable Electric Wire:AWG 22-14
7. Screw Torque Value: 0.5 N.m

技术要求:
1.额定电压: 300V, 额定电流: 15A
2.间距: 7.62mm
3.耐电压值: AC 2500V/min
4.绝缘阻抗500兆欧
5.使用条件: -40℃- +130℃
6.适用线规: AWG 22-14
7.螺丝扭力: 0.5 N.m

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	— ▱ ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M3*5.6(6*6)		SPFFA305621V		P	碳钢	三价铬钝化彩锌
2	LW3-7.62-焊脚		5015B0001AV		P	黄铜	镀雾锡
1	LW3M-7.62-主体		5015M0YXXAV		1	PBT	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-05-10	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-5015004 REV:V0
上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD						TITLE	LW3MB-7.62-XXP-1Y-00A
							LW3MB-7.62-成品