
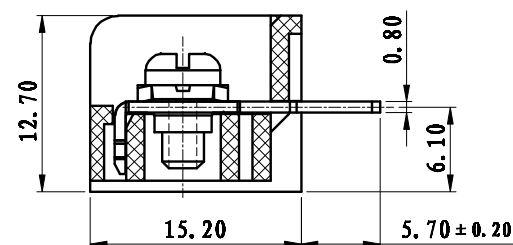
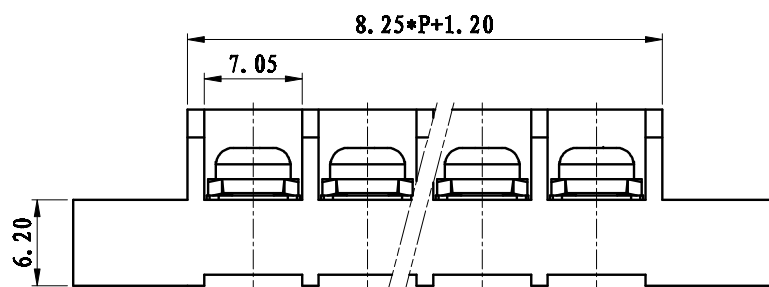
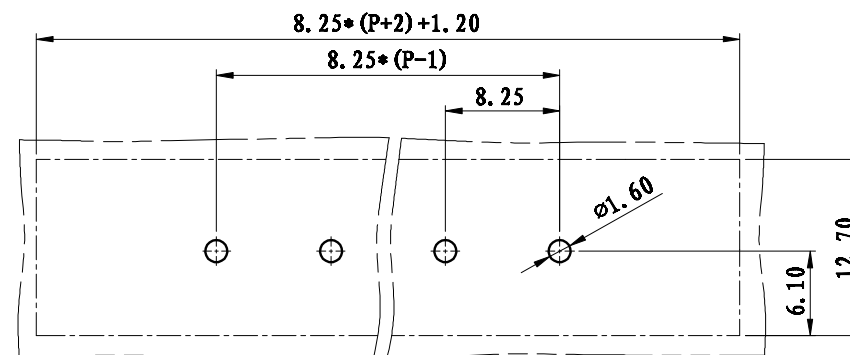


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

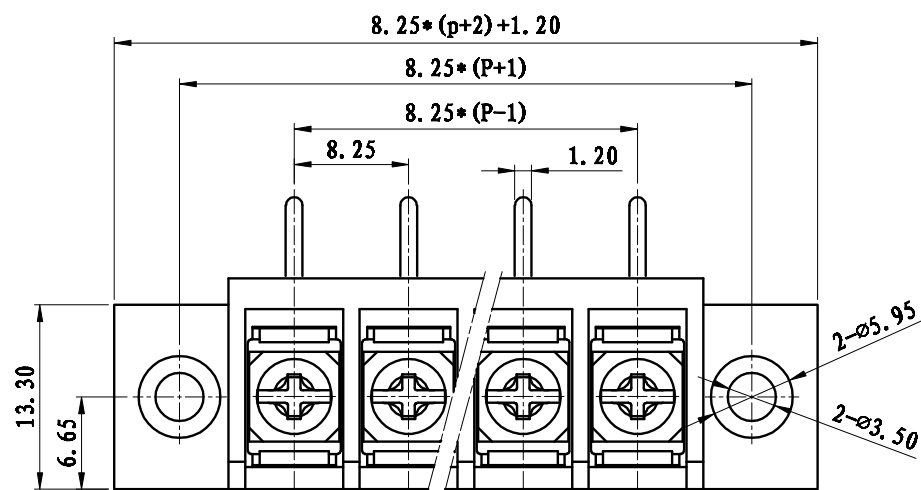

NOTES:
Pitch: 8.25mm
Rated Voltage: 300V
Rated Current: 20 A
Withstand Voltage:
AC2500V for 1 minute
Insulation Resistance:
500M Ω / DC500V
Using Temperature Range:
-40 $^{\circ}$ C ~ +130 $^{\circ}$ C
Wire range: 22-12 AWG
Screw Torque Value: 0.5Nm

技术要求:
间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 500M Ω /DC500V
使用条件: -40 $^{\circ}$ C~+130 $^{\circ}$ C
适用线规: 22-12 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

3.	M3*6 (6.5*6.5)	SPFFA306031V	P	碳钢	三价铬钝化彩锌
2.	LW3R-8.25-焊脚	5001B0002AV	P	黄铜	镀雾锡
1.	LW3M-8.25-本体	5001M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	2010/5/8	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-5001004
				TITLE	LW3MR-8.25-XP-1Y-00A
					LW3MR-8.25-成品



上海联捷电气有限公司
Shanghai Blinker Electric Co., Ltd

TITLE
LW3MR-8.25-XP-1Y-00A
LW3MR-8.25-成品