
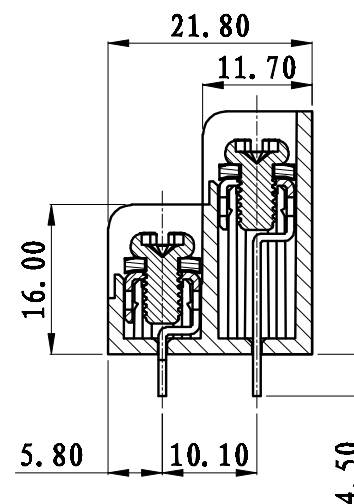
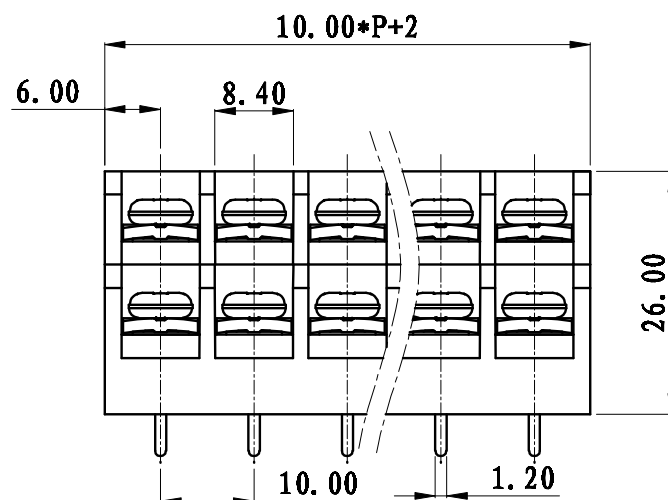
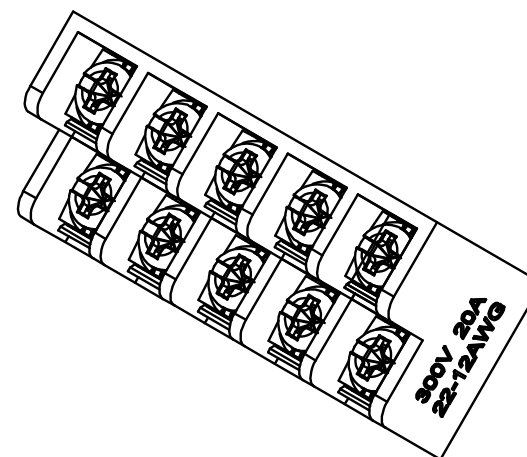


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		

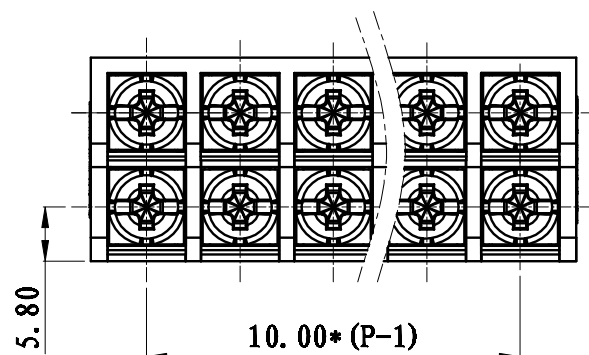

NOTES:
Pitch: 10.0mm
Rated Voltage: 300V
Rated Current: 20 A
Withstand Voltage:
AC2500V for 1 minute
Insulation Resistance:
1000MΩ / DC500V
Using Temperature Range:
-40℃ ~ +130℃
Wire range: 22~12 AWG
Screw Torque Value: 1.2Nm

技术要求:
间距: 10.0mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	M4*7-8*8	SPFPA407053V	P*2	碳钢	三价铬钝化彩锌
3	LW6C-10.0-短焊脚	5029B0001AV	P	黄铜	镀锡
2	LW6C-10.0-长焊脚	5029B0002AV	P	黄铜	镀锡
1	LW6-10.0-主体	5029A0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	ARKINE	DATE 2017/11/16	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE		DWG NO. SP-2-5029001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LW6C-10.0-2*XP-1Y-00A LW6C-10.0-成品