
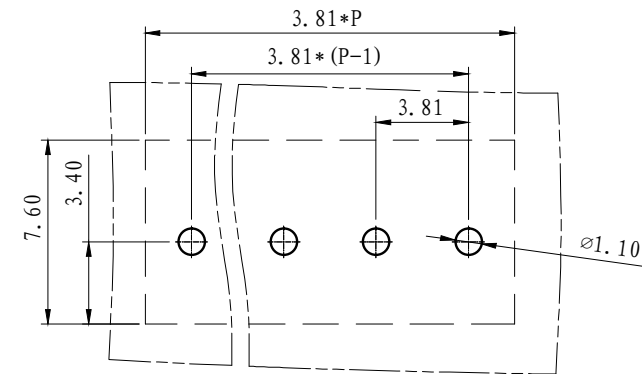
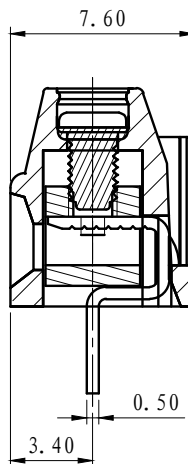
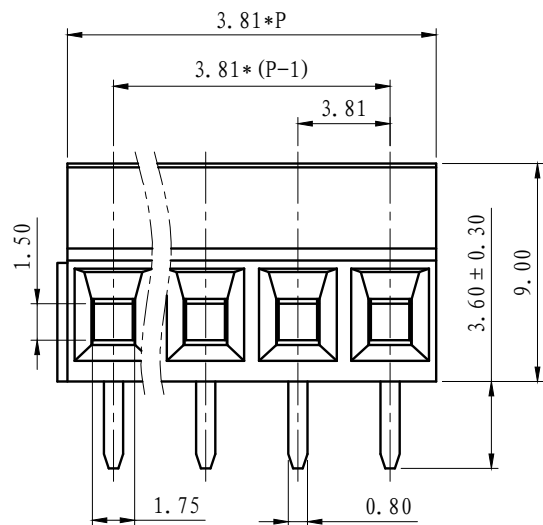


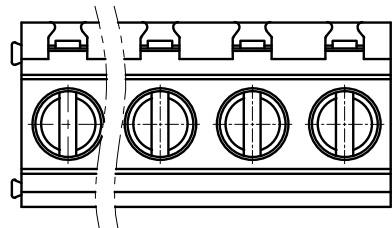

	pitch dimension			Nominal dimension					— ◇ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	出版发行		

NOTES1:

UL Standard:

1. Voltage Rating: 300V, Current Rating: 8A

IEC Standard:

1. Voltage Rating: 200V, Current Rating: 8A

技术要求1:

UL 标准:

1. 额定电压: 300V, 额定电流: 8A

IEC 标准:

1. 额定电压: 200V, 额定电流: 8A

NOTES2:

1. PITCH: 3.81mm

2. Insulation Withstands Voltage: AC2500V/min

3. Insulation Resistance: 500MΩ or more at DC500V

4. Using Temperature Range: -40℃ - +105℃

5. Suitable Electric Wire: 26-16AWG

6. Screw Torque Value: 0.2 N.m

技术要求2:

1. 间距: 3.81mm

2. 耐电压值: AC 2500V/min

3. 绝缘阻抗: 500MΩ/DC500V

4. 使用条件: -40℃ - +105℃

5. 适用线规: 26-16AWG

6. 螺丝扭力: 0.2 N.m

4	LG381-螺丝	SP0YA203301V	P	碳钢	三价铬钝化彩锌
3	LG381-铜方块	F1A0BLG3813V	P	黄铜	镀镍
2	LG381-短焊脚	2036B0001AV	P	黄铜	镀雾锡
1	LG381-3.81-主体	2036A0YXXAVP	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WY	DATE 2021-01-30	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-2036002 REV: V0
				上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD	
				TITLE	LG381V-3.81-XXP-1Y-00A LG381V-3.81-成品