
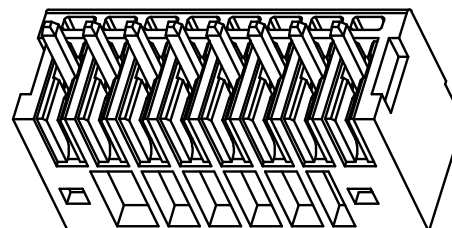


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		



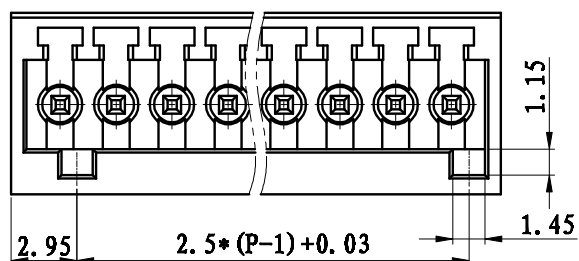


NOTES:

Pitch: 2.5mm
Rated Voltage: 150V
Rated Current: 4A
Withstand Voltage:
AC2000V for 1 minute
Insulation Resistance:
500MΩ / DC500V
Using Temperature Range:
-40℃ ~ +105℃

技术要求:

间距: 2.5mm
额定电压: 150V
额定电流: 4A
耐电压值: AC2000V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃

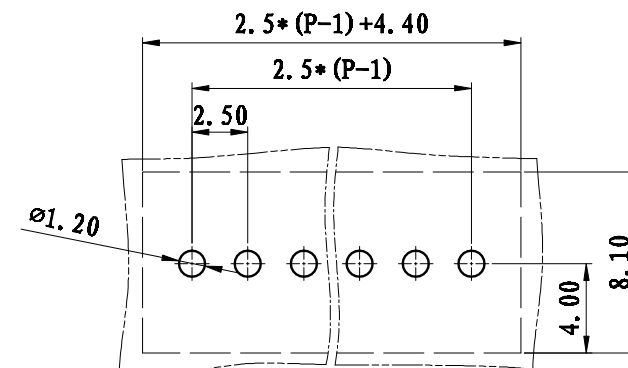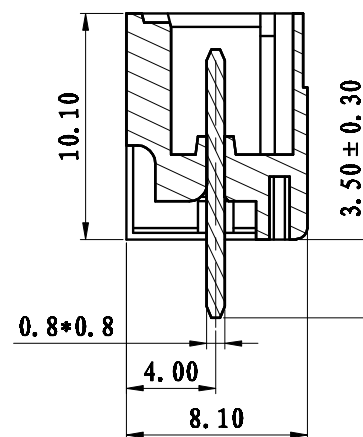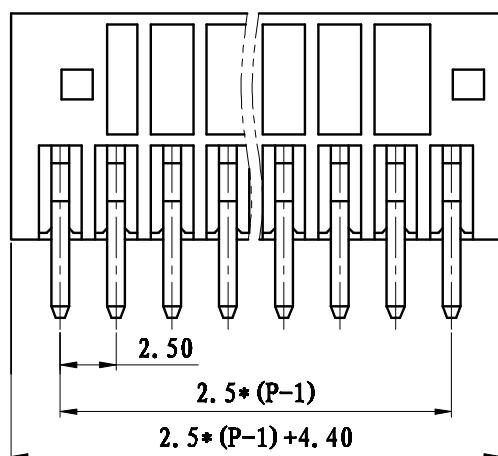

	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ1-3.81-直针四周带齿	1003B0005AV	P	黄铜	镀锡
1	LZ1-2.5-主体	1037A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINB	DATE 2012/4/21	UNITS mm	THIRD ANGLE PROJECTION	SHEET 1 of 1
CHK.		DATE	SIZE A4		
APP.		DATE	SCALE	DWG NO. SP-2-1037002	REV: V0
上海联捷电气有限公司 Shanghai Blinker Electric CO.,LTD				TITLE	LZ1V-2.5-XXP-1Y-00A
					LZ1V-2.5-成品