
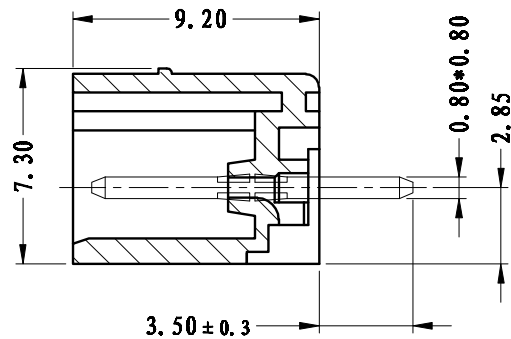



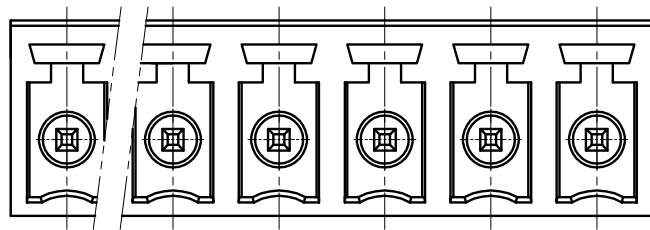


NOTES:

Pitch : 3.96mm
Rated Voltage : 300V
Rated Current : 8 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
-40℃ ~ +105℃

技术要求:

间距: 3.96mm
额定电压: 300V
额定电流: 8A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃

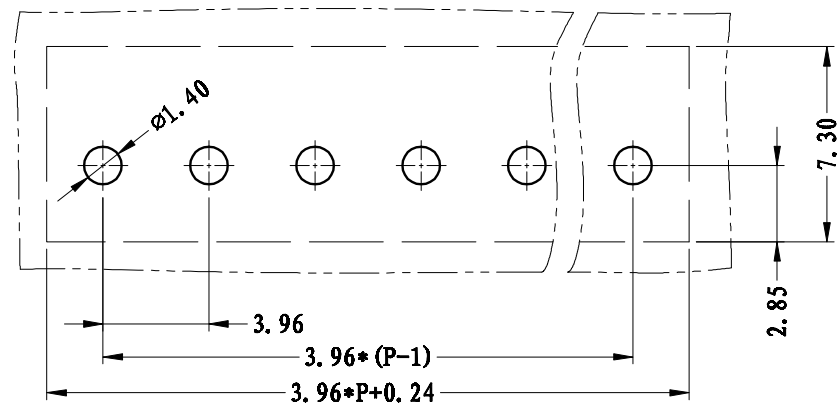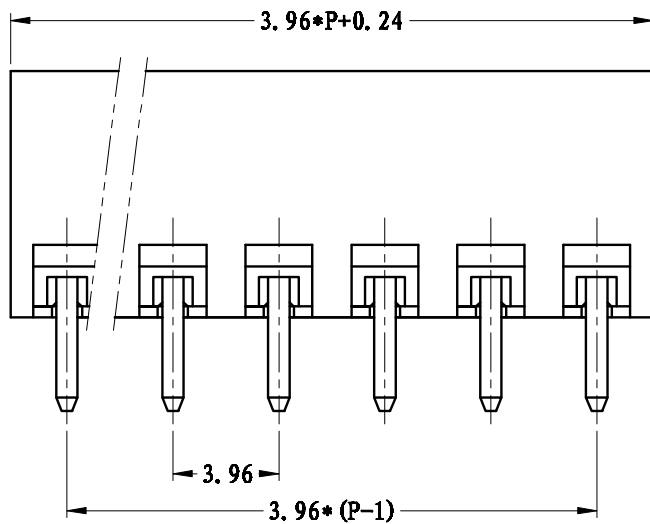

	pitch dimension			Nominal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

2	LZ1-3.96-直针	100300001AV	P	黄铜	镀锡
1	LZ1-3.96-本体	1049A0YXXIV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARINKER	DATE	11-07-5	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LZ1V-3.96-XP-1Y-00A
					LZ1V-3.96-成品