
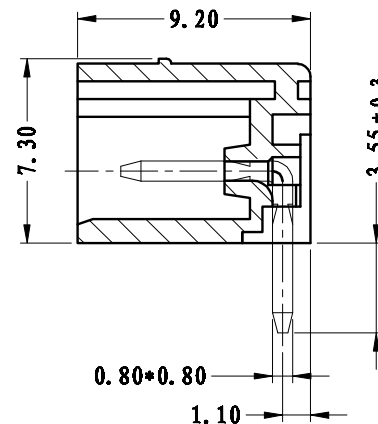


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
①	初版发行		

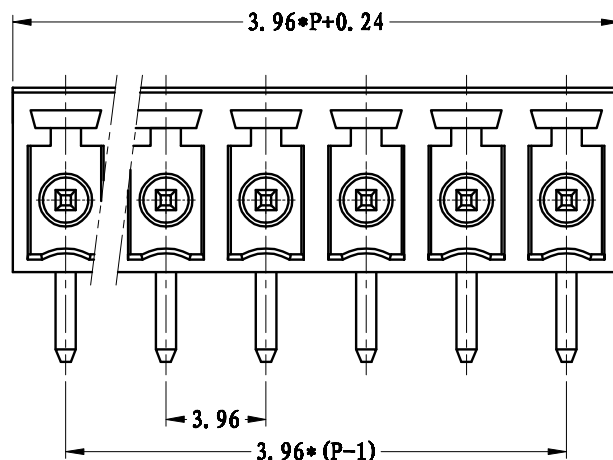

NOTES:

Pitch: 3.96mm

Rated Voltage: 300V

Rated Current: 8A

Withstand Voltage:

AC2500V for 1 minute

Insulation Resistance:

500MΩ / DC500V

Using Temperature Range:

-40℃ ~ +105℃

技术要求:

间距: 3.96mm



额定电压: 300V

额定电流: 8A

耐电压值: AC2500V/min

绝缘阻抗: 500MΩ/DC500V

使用条件: -40℃~+105℃

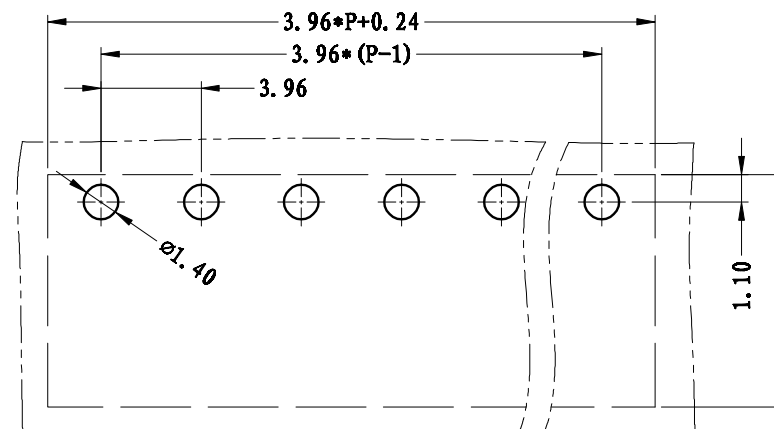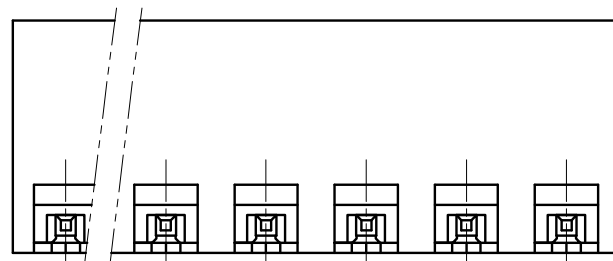

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ1-3.96-弯针	1003B0002AV	P	黄铜	镀锡
1	LZ1-3.96-本体	1049A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARINKER	DATE	11-07-5	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C.O., LTD				TITLE	LZ1R-3.96-XP-1Y-00A
					LZ1R-3.96-成品