
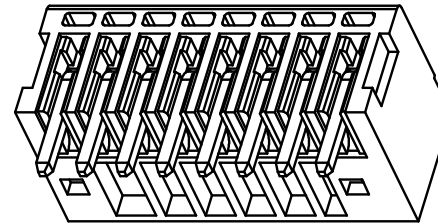


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		



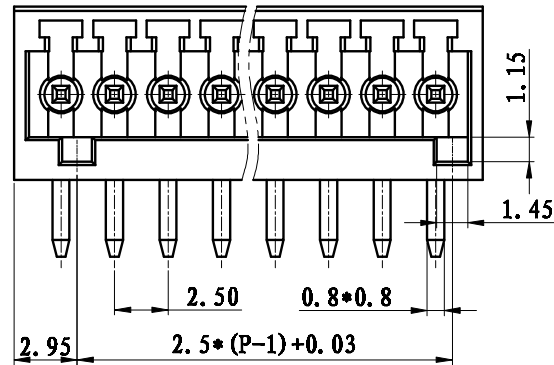


NOTES:

Pitch : 2.5mm
Rated Voltage : 150V
Rated Current : 4 A
Withstand Voltage :
AC2000V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
-40℃ ~ +105℃

技术要求:

间距: 2.5mm
额定电压: 150V
额定电流: 4A
耐电压值: AC2000V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃

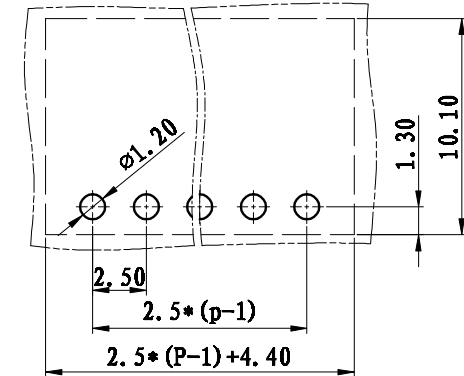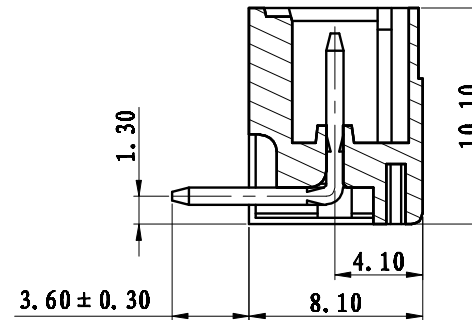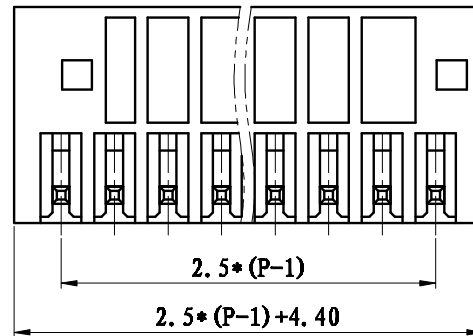

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ1-2.5-弯针	1037B0001AV	P	黄铜	镀锡
1	LZ1-2.5-主体	1037A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	ARKINB	DATE 2012/4/21	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE		DWG NO. SP-2-1037001 RBV: V0
 上海联捷电气有限公司 Shanghai Blinker Electric CO.,LTD				TITLE	
				LZ1R-2.5-成品	