
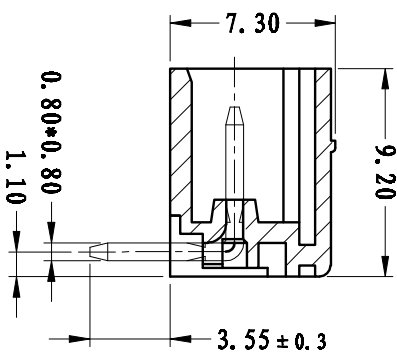




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

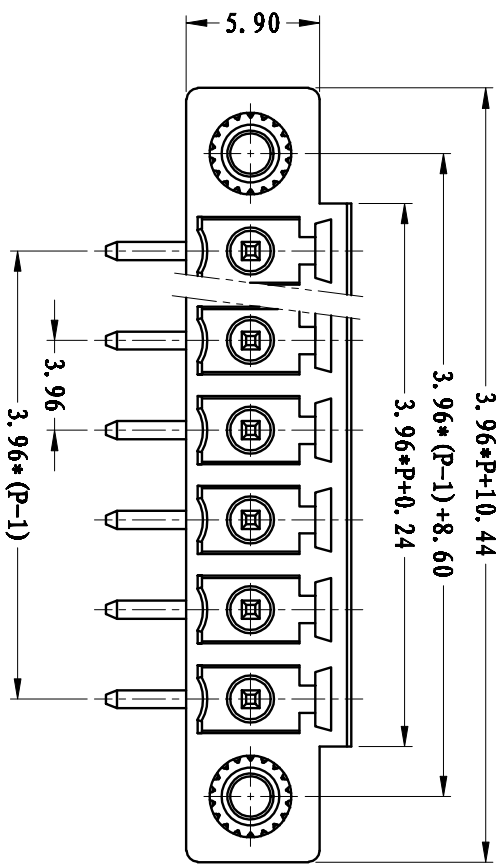

NOTES:

Pitch: 3.96mm
Rated Voltage: 300V
Rated Current: 8A
Withstand Voltage: AC2500V for 1 minute
Insulation Resistance: 500MΩ / DC500V
Using Temperature Range: -40°C ~ +105°C

技术要求:
间距: 3.96mm
额定电压: 300V
额定电流: 8A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ / DC500V
使用条件: -40°C ~ +105°C

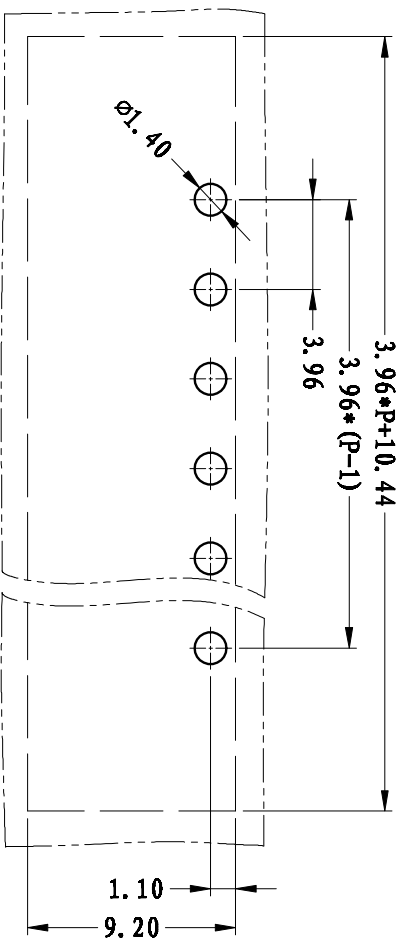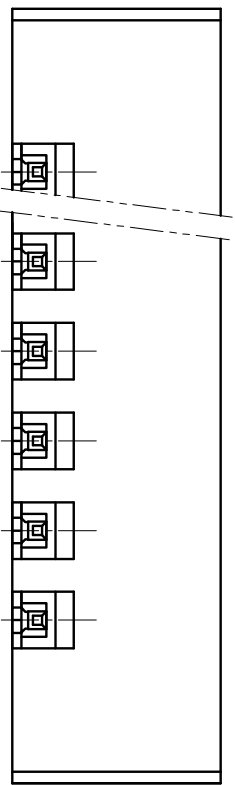

	pitch dimension			Nominal dimension					— □ (
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
								0.05/10	

3	LZ1-耳夹编号	SM008250000V	2	黄铜	
2	LZ1-3-81-螺钉	100380021V	P	黄铜	彼露场
1	LZ1M-3-96-本体	104900V11V	1	PA66-70	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	11-07-5	UNITS	MM	THIRD ANGLE PROJECTION
CHE.	DATE		SIZE	A4	SHEET
APP.	DATE		SCALE	1:1	1 of 1
上海联捷电气有限公司					
Shanghai Blinter Electric C.O.,LTD					
TITLE					
LZ1M-3-96-XP-1Y-00A					
LZ1M-3-96-成品					