

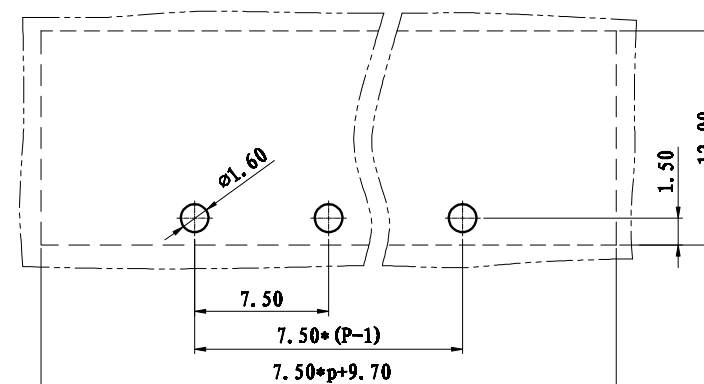
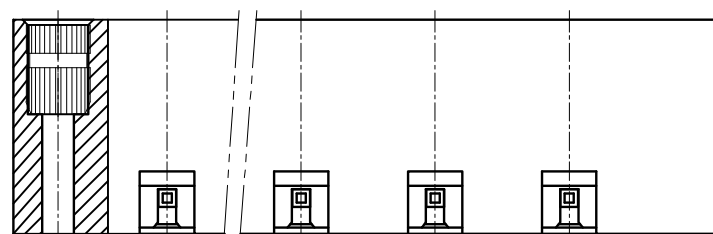


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

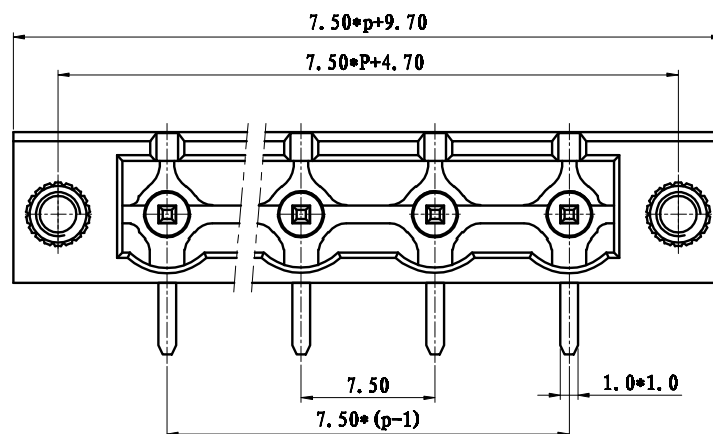

NOTES:

Pitch : 7.5mm
Rated Voltage : 400V
Rated Current : 20A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
-40℃ ~ +105℃





技术要求:

间距: 7.5mm
额定电压: 400V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1-耳朵螺母	SNM0250010V	2	黄铜	—
2	LZ1-5.08-弯针	1015B0001AV	P	黄铜	镀锡
1	LZ1M-7.5-本体	1013M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE 11-04-06	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-1008004 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric Co., Ltd				TITLE	LZ1RM-7.5-XP-1Y-00A
					LZ1RM-7.5-成品

REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		

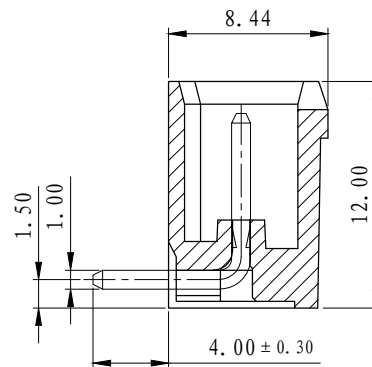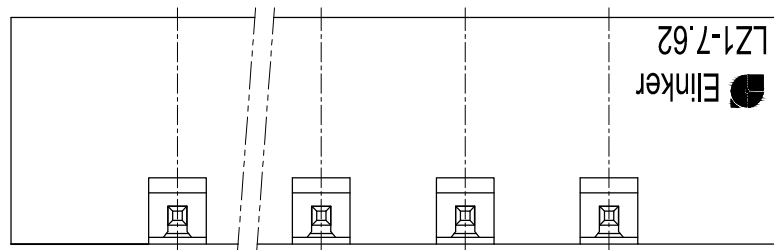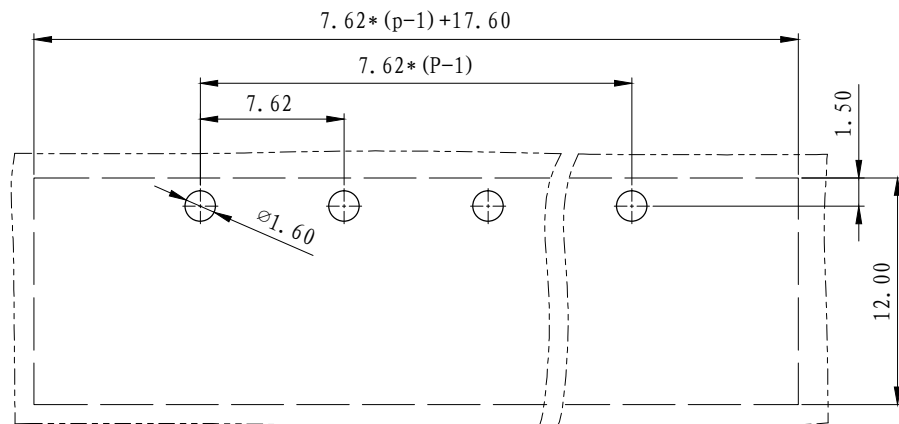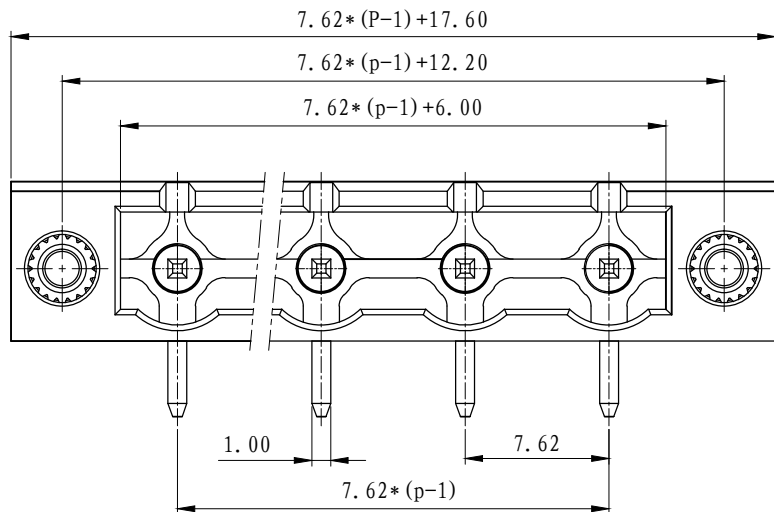

NOTES:

Pitch : 7.62mm
Rated Voltage : 400V
Rated Current : 15 A
Withstand Voltage :
AC2500V for 1 minute
Using Temperature Range :
-40℃ ~ +105℃

技术要求:

间距: 7.62mm
额定电压: 400V
额定电流: 15A
耐电压值: AC2500V/min
使用条件: -40℃~+105℃

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1-耳朵螺母	SM00B250000V	2	黄铜	
2	LZ1-5.08-弯针	1015B0001AV	P	黄铜	镀雾锡
1	LZ1M-7.62-本体	1008M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	24-08-26	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD				TITLE	LZ1RM-7.62-XXP-1Y-00A
					LZ1RM-7.62-成品