
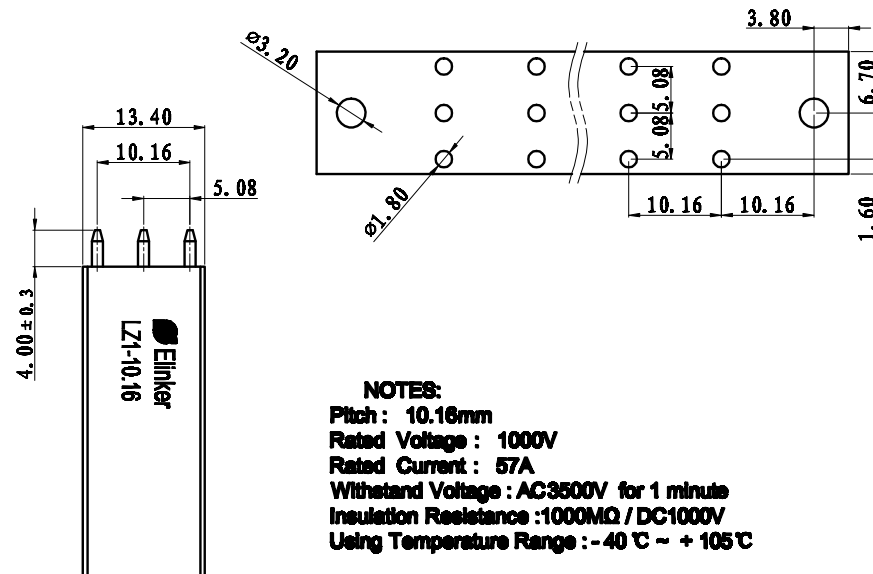


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

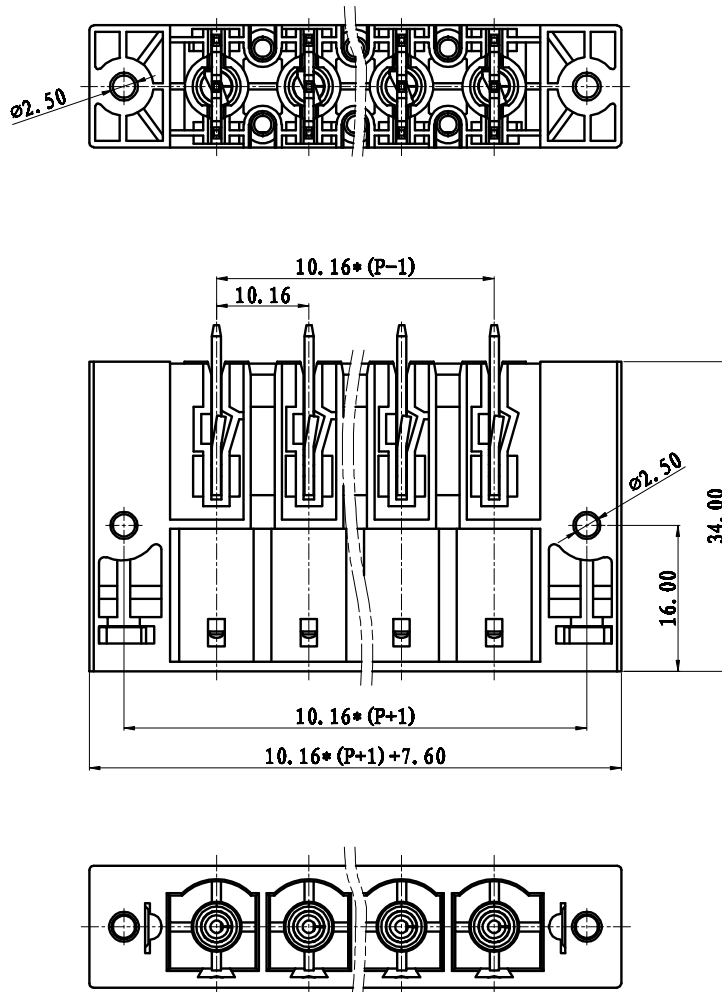

NOTES:
Pitch : 10.16mm
Rated Voltage : 1000V
Rated Current : 57A
Withstand Voltage : AC3500V for 1 minute
Insulation Resistance :1000MQ / DC1000V
Using Temperature Range : -40℃ ~ +105℃

技术要求:
间距: 10.16mm
额定电压: 1000V
额定电流: 57A
耐电压值: AC3500V/min
绝缘阻抗: 1000MQ/DC1000V
使用条件: -40℃~+105℃

	pitch dimension			Naminal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3.	LZ1-10.16-铁片	1147B0003AV	2	碳钢	三价铬钝化彩锌
2.	LZ1V-10.16针	1147B0001AV	P	紫铜	镀银
1.	LZ1-10.16-本体	1147M0YXXAV	1	PA66-V0	绿色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2017/07/14	UNITS	MM
CHK.	DATE			SIZE	A4
APP.	DATE			SCALE	1:1
				DWG NO.	SP-2-1147A001
				REV:	V0
				TITLE	LZ1VM-10.16-XP-1Y-00A
					LZ1VM-10.16-成品



上海联捷电气有限公司
Shanghai Blinker Electric CO.,LTD