

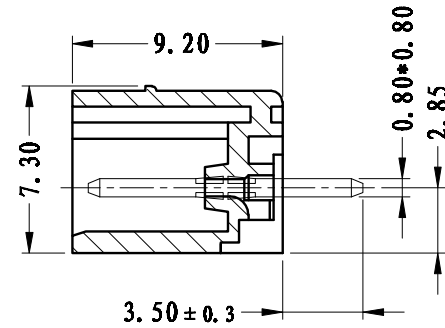
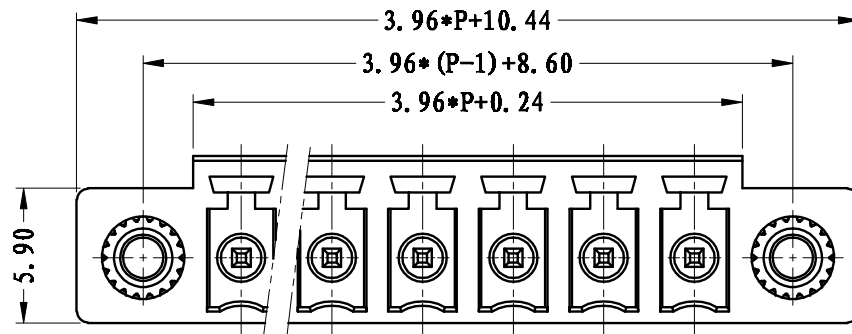


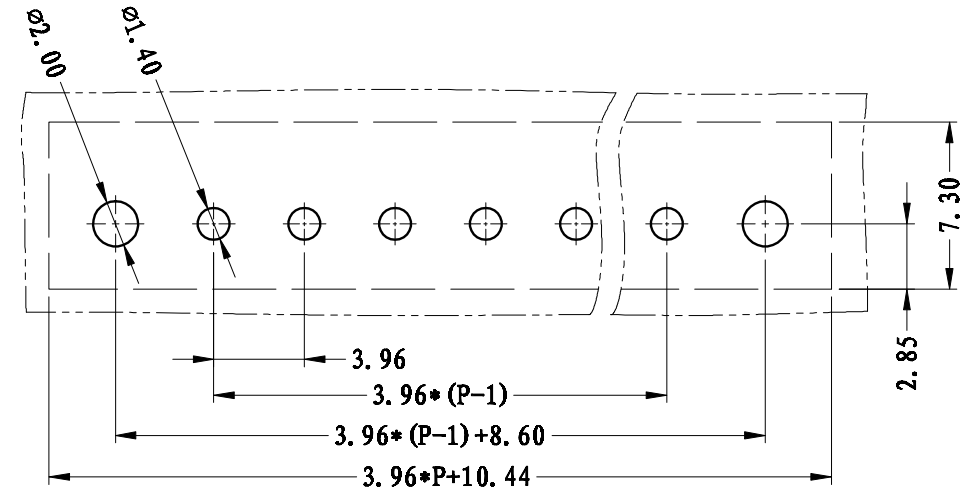

NOTES:
Pitch: 3.96mm
Rated Voltage: 300V
Rated Current: 8A
Withstand Voltage: AC2500V for 1 minute
Insulation Resistance: 500MQ / DC500V
Using Temperature Range: -40℃ ~ +105℃

技术要求:
间距: 3.96mm
额定电压: 300V
额定电流: 8A
耐电压值: AC2500V/min
绝缘阻抗: 500MQ/DC500V
使用条件: -40℃~+105℃

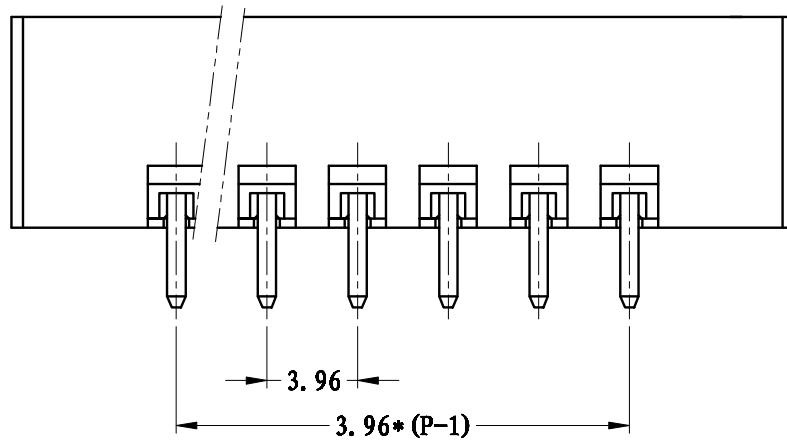

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1-耳夹螺母	SHD08250000V	2	黄铜	
2	LZ1-3.81-直针	1003B0001AV	P	黄铜	绝缘层
1	LZ1M-3.96-本体	1049M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARINKER	DATE	11-07-5	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LZ1VM-3.96-XXP-1Y-00A
					LZ1VM-3.96-成品