
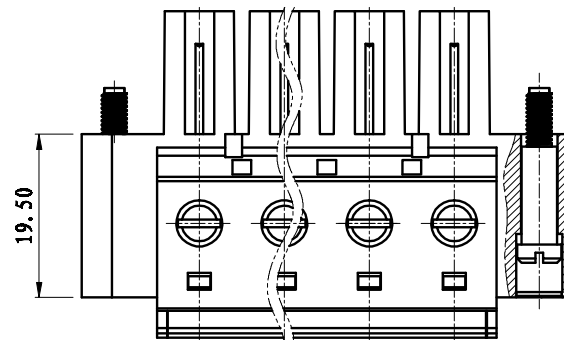


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

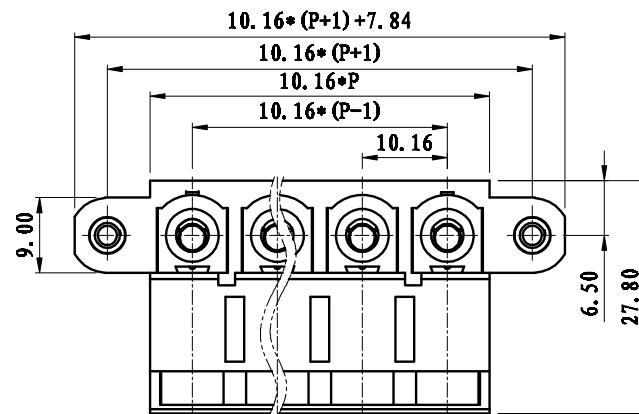


NOTES:

1. Voltage Rating: 1000V, Current Rating: 57A
2. PITCH: 10.16mm
3. Insulation Withstands Voltage: AC3500V/min
4. Insulation Resistance: 1000MΩ or more at DC1000V
5. Using Temperature Range: -40° C ~ +105° C
6. Suitable Electric Wire: 20-6AWG
7. Screw Torque Value: 1.2Nm

技术要求:

1. 额定电压: 1000V, 额定电流: 57A
2. 间距: 10.16mm
3. 耐压值: AC 3500V/min
4. 绝缘电阻: 1000兆欧
5. 使用条件: -40° C ~ +105° C
6. 适用线规: 20-6AWG
7. 螺丝扭力: 1.2Nm

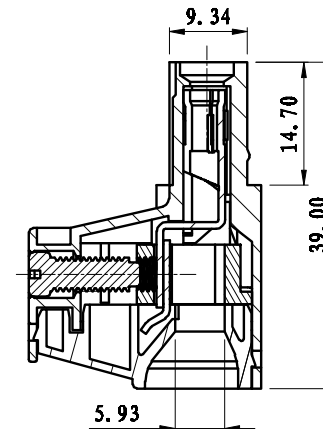

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		◇
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7.	LC1-10.16-耳朵螺母		SPOYA401001V		2	碳钢	三价铬钝化彩锌	
6.	LC1-10.16-弹片		F2A0DLC116BV		P	不锈钢		
5.	LC1-10.16-夹子		1137B0001AY		P	紫铜	镀银	
4.	LC1-10.16-螺丝		SPOYA401001V		P	碳钢	三价铬钝化彩锌	
3.	LC1-10.16-铜方块		F1A0BLC1163V		P	黄铜	镀镍	
2.	LC1-10.16-盖板		1137C0YXXAY		1	PA66		
1.	LC1M-10.16-本体		1137M0YXXAY		1	PA66		
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	ZSH	DATE	2016/03/07	UNITS	MM	THIRD ANGLE PROJECTION	SHEET	
CHK.		DATE		SIZE	A4		1 of 1	
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1137001	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD						TITLE	LC1M-10.16-XXP-1Y-00A	
							LC1M-10.16-成品	