

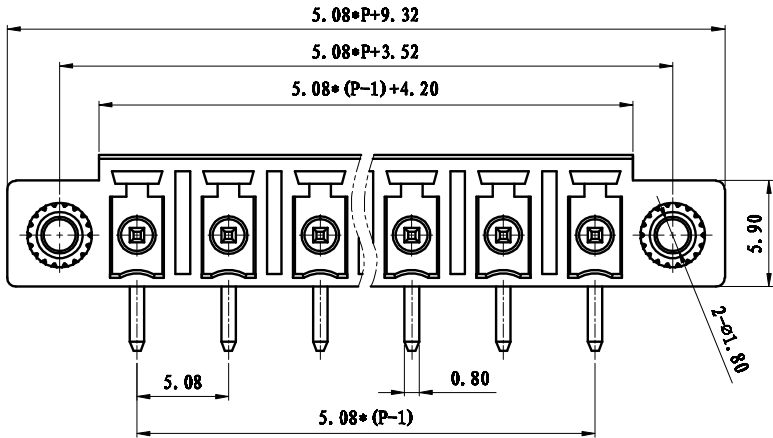
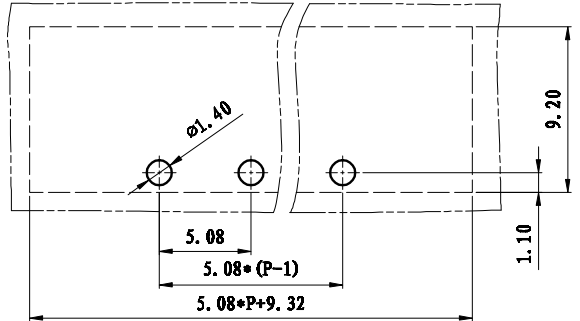


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

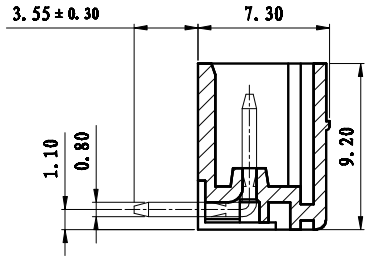

NOTES:
Pitch : 5.08 mm
Rated Voltage : 300V
Rated Current : 8A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃

技术要求:
间距: 5.08mm
额定电压: 300V
额定电流: 8A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃

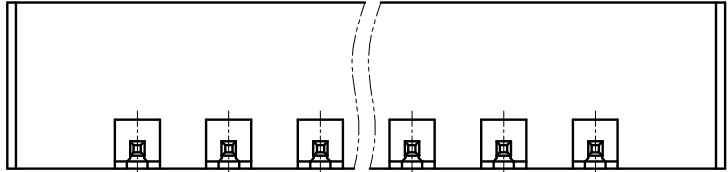

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150 to 200	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1-耳朵螺母	SMO08250000V	2	黄铜	
2	LZ1-3.81-弯针	1003B0002AV	P	黄铜	镀雾锡
1	LZ1XM-5.08-主体	1039M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	ARKINE	DATE	2012/4/25	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				THIRD ANGLE PROJECTION	SHEET
				DWG NO.	1 of 1
				REV: V0	
				TITLE	LZ1XM-5.08-1Y-00A
					LZ1XM-5.08-成品

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD