



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

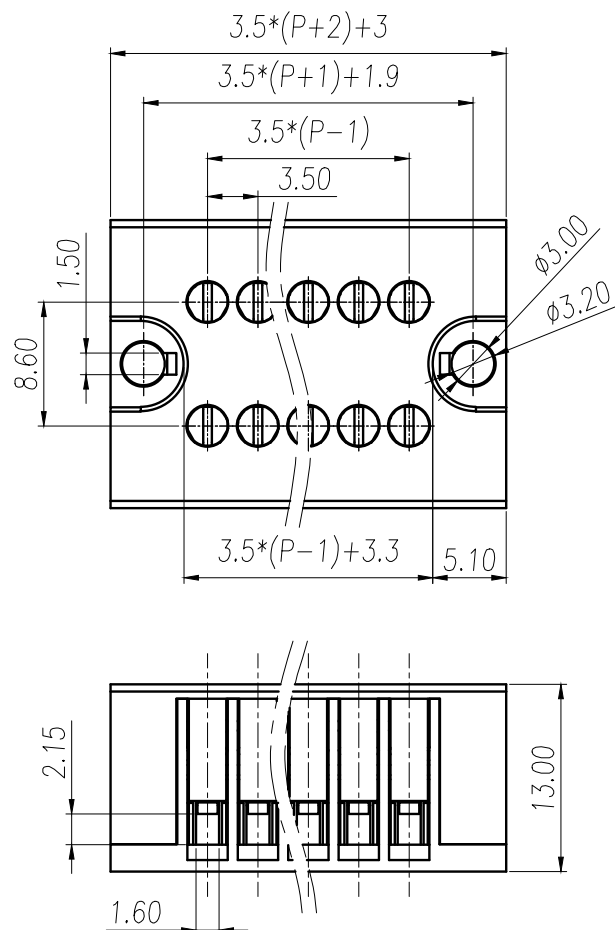

NOTES:
Pitch : 3.5mm
Rated Voltage : 380V
Rated Current : 8A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 24~ 16AWG

技术要求:
间距: 3.5mm
额定电压: 380V
额定电流: 8A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 24~16AWG

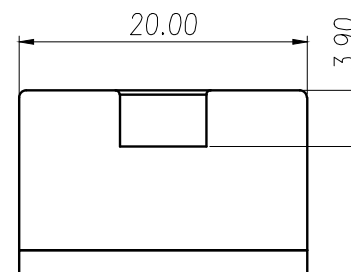

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

	H3800导电件	4020B0001AV	P	黄铜	镀镍
	LC1-3.81-铜方块	F1A0BLC3813V	2P	黄铜	镀镍
3	LC1-3.81-螺丝(一字平头)	SP0YA204801V	2P	碳钢	三价铬钝化彩锌
2	H3800-盖板	4020C0YXXAV	1	PA66-V0	
1	H3800-本体	4020A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WY	DATE	2021/5/11	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric Co., Ltd				TITLE	H3800-XXP-1Y-00A
					H3800-成品