


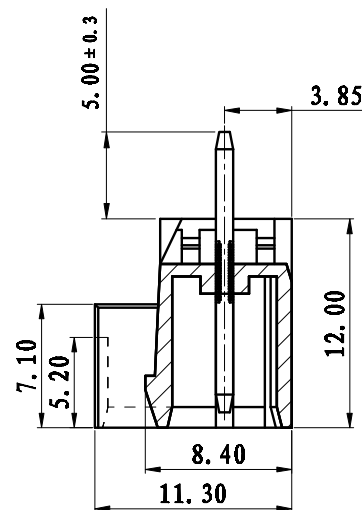
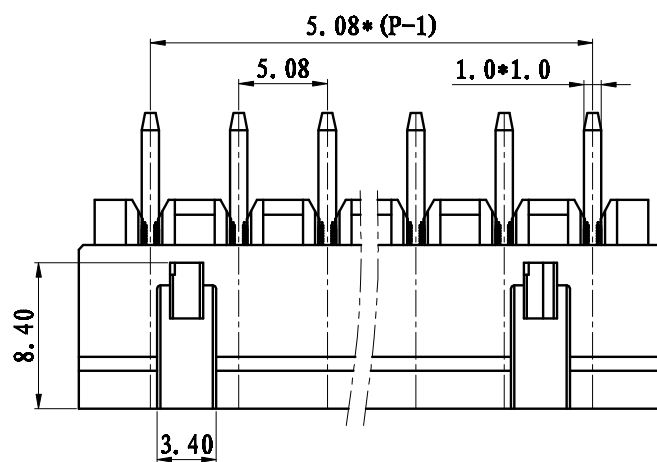
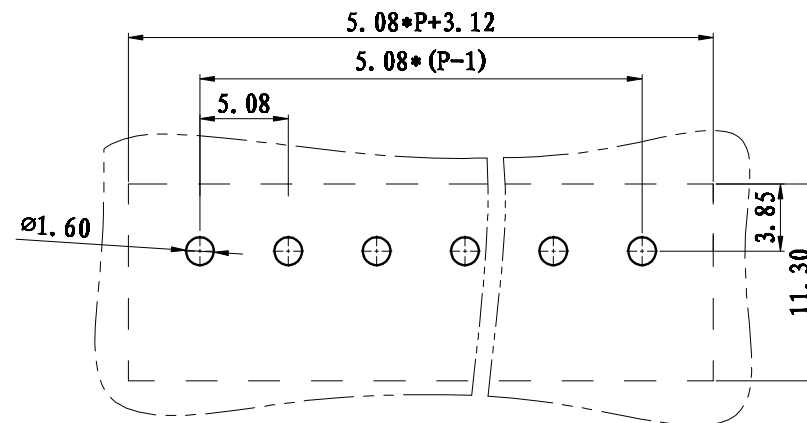


2P

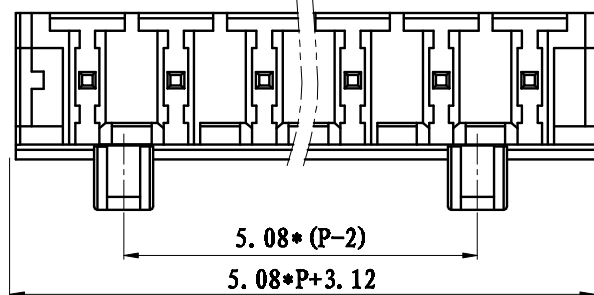

3P



NOTES:

Pitch: 5.08mm

Rated Voltage: 300 V

Rated Current: 15 A

Withstand Voltage:

AC2500V for 1 minute

Insulation Resistance:

500MΩ / DC500V

Using Temperature Range:

-40℃ ~ +105℃

技术要求:

间距: 5.08mm

额定电压: 300V

额定电流: 15A

耐电压值: AC2500V/min

绝缘阻抗: 500MΩ / DC500V

使用条件: -40℃ ~ +105℃

	pitch dimension			Nominal dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

2	LSZ1-5.08-直针		1055B00010V		P	黄铜	镀雾锡
1	LSZ1B-5.08-主体		1060A0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/08/15	UNITS	mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE		DWG NO.	SP-2-1060001 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	LSZ1BV-5.08-XP-1Y-00A
							LSZ1BV-5.08-成品