
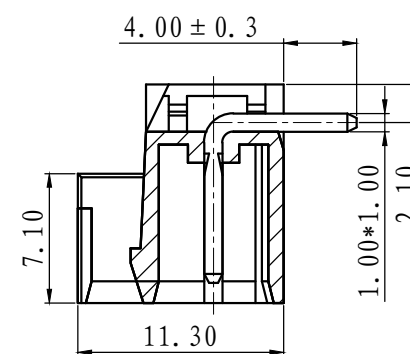
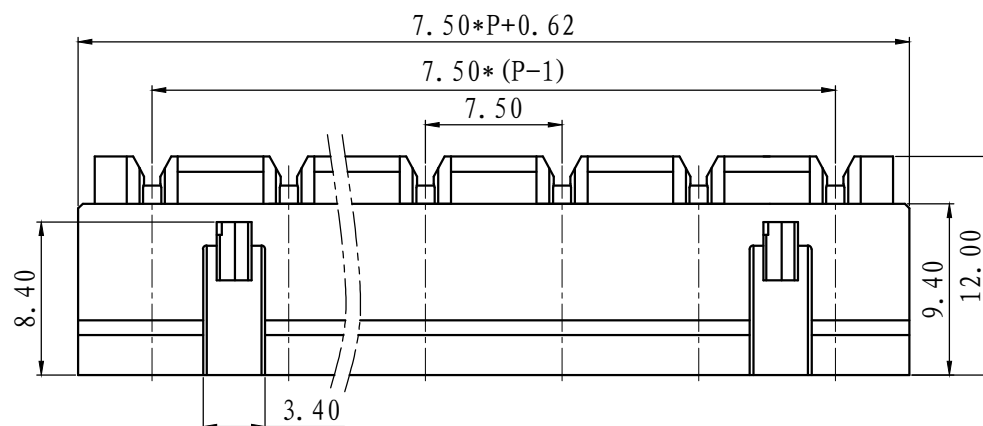
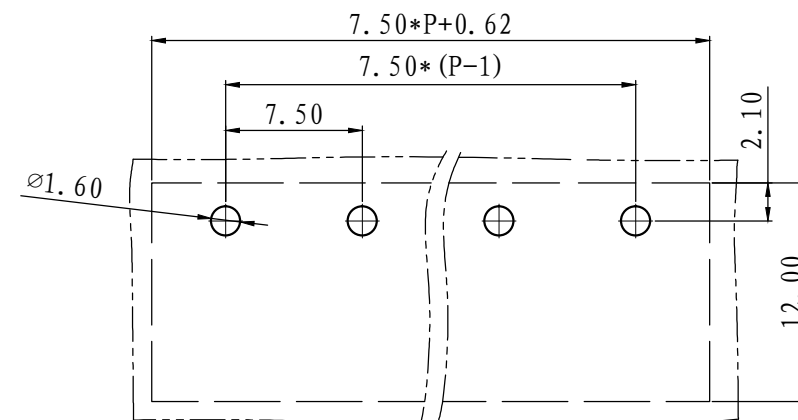


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

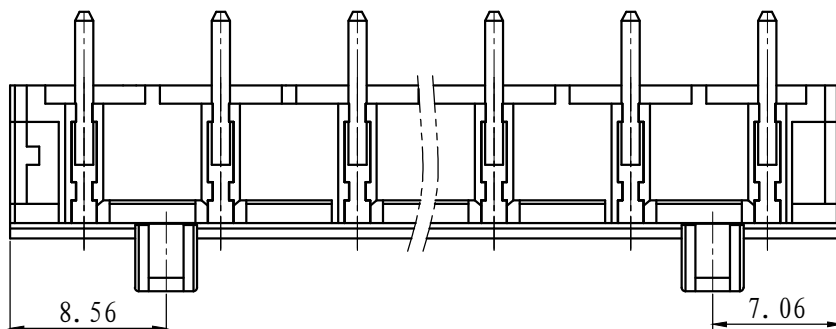

SECTION A-A

NOTES:

1. Voltage Rating: 300V, Current Rating: 15A
2. PITCH: 7.5mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40°C- +105°C
5. Pole: 2-12P

技术要求:

1. 额定电压: 300V, 额定电流: 15A
2. 间距: 7.5mm
3. 耐压值: AC 2500V/min
4. 使用条件: -40°C- +105°C
5. 极数: 2-12P

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— □ ○
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LSZ1-5.08-弯针	1055B0002AV	P	黄铜	镀雾锡
1	LSZ1B-7.5-主体	1093A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/15	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4	⊗	1 of 1
APP.		DATE	SCALE 1: 1	DWG NO.	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LSZ1BR-7.5-XXP-1Y-00A LSZ1BR-7.5-成品