

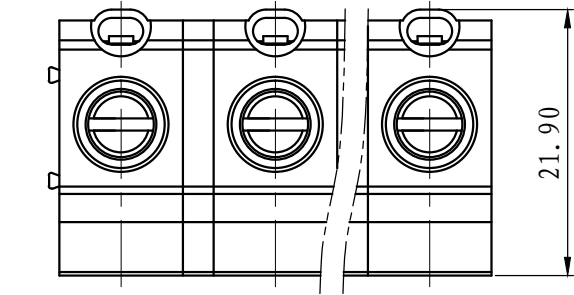
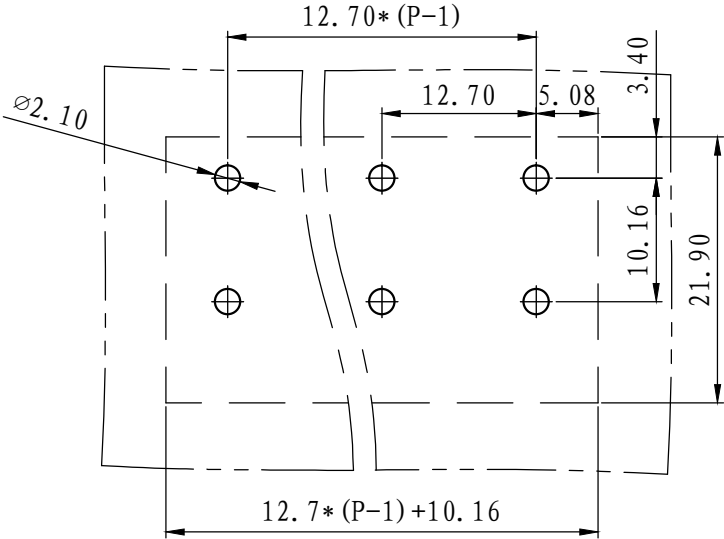


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

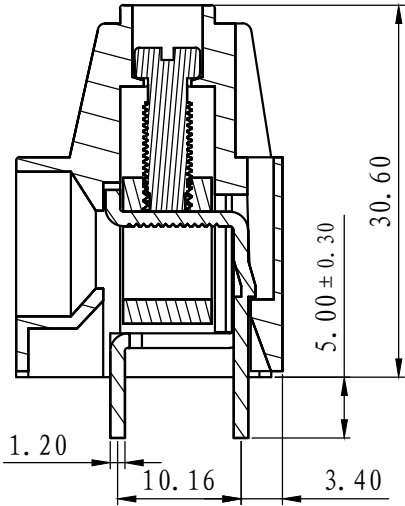

技术要求:
 间距: 12.70mm
 额定电压: 1000V
 额定电流: 57A
 耐电压值: AC3500V/min
 绝缘阻抗: 1000MΩ/DC1000V
 使用条件: -40℃ ~ +105℃
 适用线规: 20~6 AWG
 螺丝扭矩: 1.2N.m

NOTES:
 Pitch : 12.70mm
 Rated Voltage : 1000V
 Rated Current : 57A
 Withstand Voltage :
 AC3500V for 1 minute
 Insulation Resistance :
 1000MΩ / DC1000V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range :20 ~6 AWG
 Screw Torque Value : 1.2N.m

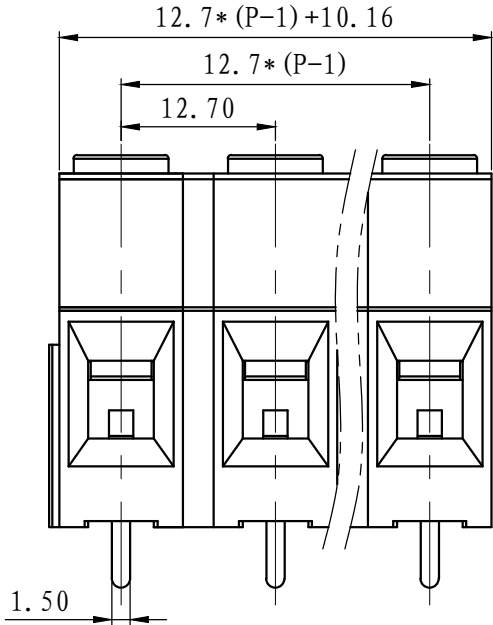

	pitch dimension			Naminal dimension					— ▧ ⌒
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LG1016A-2.54-隔板	2069H0YXXAV	P-1	PA66	
4	LG1016-螺丝	SP0YA401101V	P	碳钢	镀镍
3	LG1016-方块	F1A0BLG1163V	P	黄铜	镀镍
2	LG1016-焊脚	2069B00010V	P	黄铜	镀雾锡
1	LG1016A-10.16-主体	2069A0Y01AV	P	PA66	UL94V-0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 13/01/28	UNITS	mm	THIRD ANGLE PROJECTION SHEET
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-1-2069A02 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LG1270-12.7-XXP-1Y-00A LG1270-12.7-成品