

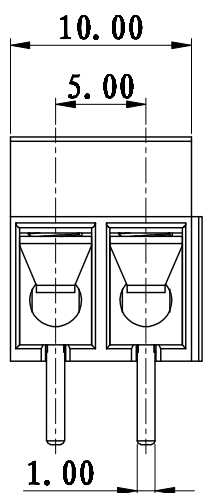





REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		



2P

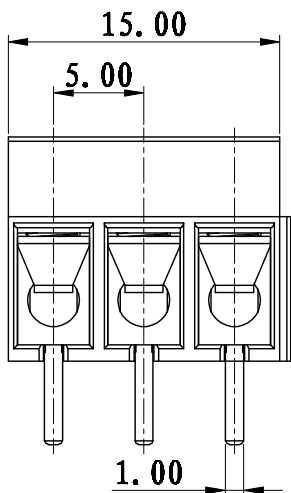

3P

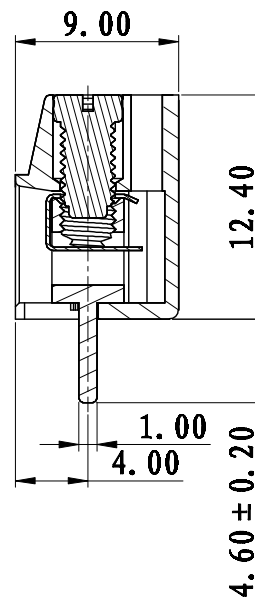


NOTES:

1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500MΩ or more at DC500V
5. Using Temperature Range: -30° C - +120° C
6. Suitable Electric Wire: 22-14AWG
7. Screw Torque Value: 0.5Nm

技术要求:

1. 额定电压: 300V, 额定电流: 10A
2. 间距: 5.0mm
3. 耐电压值: AC 2500V/min
4. 绝缘阻抗: 500兆欧/DC500V
5. 使用条件: -30° C - +120° C
6. 适用线规: 22-14AWG
7. 螺丝扭力: 0.5Nm

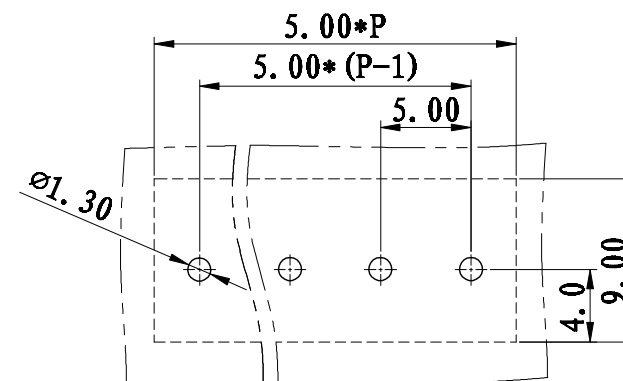

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LG300-5.0-螺丝	SP0YA305301V-1	P	碳钢	三价铬钝化彩锌
3	LG300-5.0-弹片	F2A0DLG300BV	P	不锈钢	
2	LG300V-5.0-方针	2071B0001AV	P	黄铜	镀锡
1	LG300V-5.0-主体	2071A0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WL	DATE	2013/02/20	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1: 1
DWG NO.				SP-2-2071001	REV: V0
TITLE				LG300V-5.0-XXP-1Y-00A	
				LG300V-5.0-成品	



上海联捷电气有限公司
Shanghai Hlinker Electric Co., Ltd