

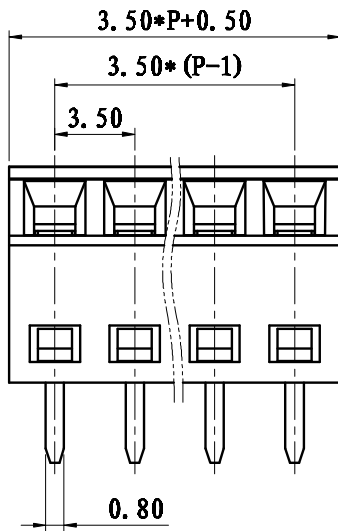




NOTES:
Pitch : 3.5mm
Rated Voltage : 300V
Rated Current : 10A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MQ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range :26~16 AWG
Screw Torque Value : 0.2Nm

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

技术要求:
间距: 3.5mm
额定电压: 300V
额定电流: 10A
耐电压值: AC2500V/min
绝缘阻抗: 500MQ/DC500V
使用条件: -40℃~+105℃
适用线规: 26~16 AWG
螺丝扭矩: 0.2Nm

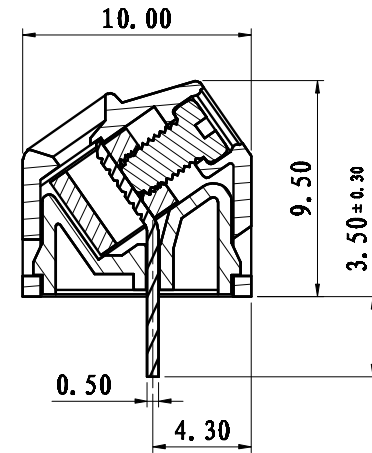

	pitch dimension			Naminl dimension					— ◇ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LG350D-3.5焊脚	2056B00010V	P	黄铜	镀雾锡
4	LG381-螺丝	SP0YA203301V	P	碳钢	三价格钝化彩锌
3	LG381-铜方块	F1A0BLG3813V	P	黄铜	镀镍
2	LG350D-3.5盖板	2056C0YXXAV	1	PA66	
1	LG350D-3.5本体	2056A0YXXAV	1	PA66	
NO. NAME OF PART		NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE 2012/06/26	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO.	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LG350D-3.5-XXP-1Y-00A
					LG350D-3.5-成品