

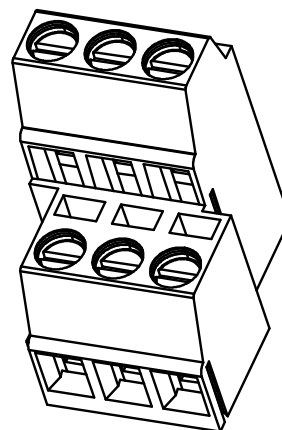

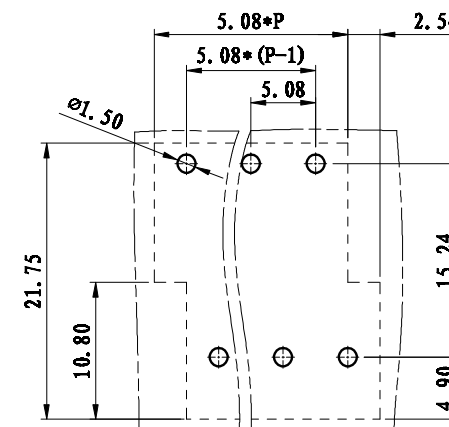


| REVISION RECORD |         |      |      |
|-----------------|---------|------|------|
| REV.            | CONTENT | MOD. | DATE |
| △               | 初版发行    |      |      |

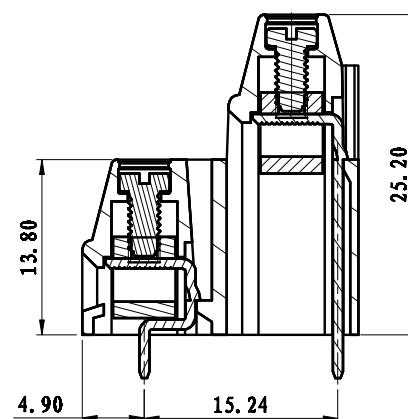

**NOTES:**  
 Pitch : 5.0mm  
 Rated Voltage : 300 V  
 Rated Current : 10A  
 Withstand Voltage : AC2500V for 1 minute  
 Insulation Resistance : 500MΩ / DC500V  
 Using Temperature Range : -40 ℃ ~ +105 ℃  
 Wire range : 26 ~14 AWG  
 Screw Torque Value : 0.4Nm

**技术要求:**  
 间距: 5.0mm  
 额定电压: 300V  
 额定电流: 10A  
 耐电压值: AC2500V/min  
 绝缘阻抗: 500MΩ/DC500V  
 使用条件: -40℃ ~+105℃  
 适用线规: 26 ~ 14AWG  
 螺丝扭矩: 0.4Nm

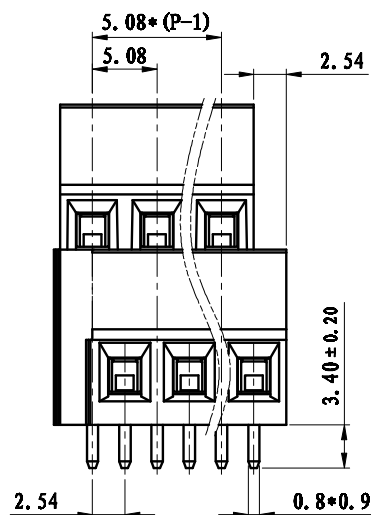

|                | pitch dimension |       |       | Nominal dimension |      |      |      |      | —       |
|----------------|-----------------|-------|-------|-------------------|------|------|------|------|---------|
|                | over            | over  | over  | over              | over | over | over | over |         |
| variable range | 0               | 6     | 10    | 0                 | 30   | 60   | 100  | 150  | □       |
|                | to              | to    | to    | to                | to   | to   | to   |      |         |
|                | 6               | 10    | 24    | 30                | 60   | 100  | 150  |      | ○       |
| Tolerance      | ±0.1            | ±0.15 | ±0.25 | ±0.2              | ±0.3 | ±0.5 | ±0.7 | ±1.0 | 0.05/10 |

| 5                                               | LC-耳朵螺丝          | SP0YA255101V    | 2P        | 碳钢                     | 三价铬钝化彩锌                                        |
|-------------------------------------------------|------------------|-----------------|-----------|------------------------|------------------------------------------------|
| 4                                               | LG128-铜方块        | F1A0BLG1283V    | 2P        | 黄铜                     | 镀镍                                             |
| 3                                               | LG500-中焊脚        | 2042B0002AV     | P         | 黄铜                     | 镀雾锡                                            |
| 2                                               | LG128-V焊脚        | 2013B0001AV     | P         | 黄铜                     | 镀雾锡                                            |
| 1                                               | LG500BZL-5.08-主体 | 2049A0YXXAV     | 1         | PA66                   |                                                |
| NO.                                             | NAME OF PART     | NO. OF PART     | Q'TY      | MATERIAL               | NOTES                                          |
| DES.                                            | ARKINE           | DATE 2011/10/23 | UNITS mm  | THIRD ANGLE PROJECTION | SHEET                                          |
| CHK.                                            |                  | DATE            | SIZE A4   | ⊗                      | 1 of 1                                         |
| APP.                                            |                  | DATE            | SCALE 1:1 | DWG NO. SP-2-2049001   | REV: Y0                                        |
| 上海联捷电气有限公司<br>Shanghai Elinker Electric CO.,LTD |                  |                 |           | TITLE                  | LG500BZL-5.08-2*XXP-1Y-00A<br>LG500BZL-5.08-成品 |