
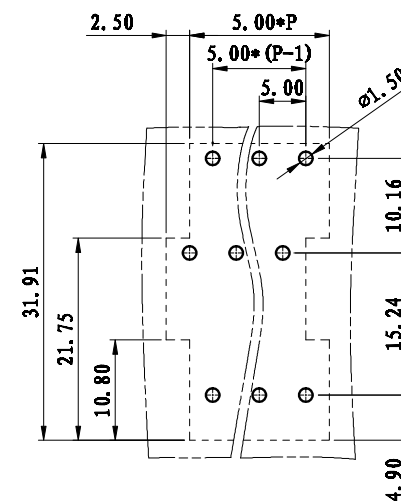


--	--	--	--

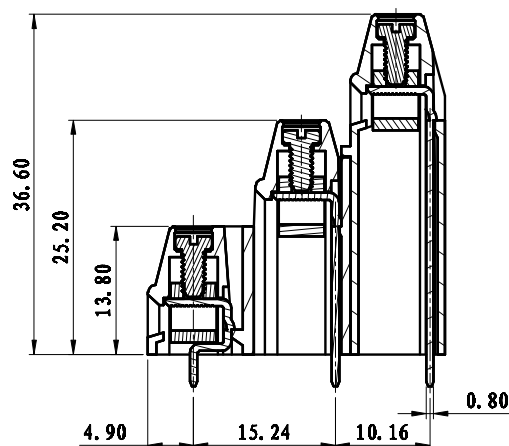

螺丝扭矩: 0.4Nm

[illegible]






REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:

Pitch : 5.0mm
Rated Voltage : 300 V
Rated Current : 10A
Withstand Voltage : AC2500V for 1 minute
Insulation Resistance :500MΩ / DC500V
Using Temperature Range : - 40℃ ~ + 105℃
Wire range :26 ~14 AWG
Screw Torque Value : 0.4Nm

技术要求:

间距: 5.0mm
额定电压: 300V
额定电流: 10A
耐压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 26~ 14AWG
螺丝扭矩: 0.4Nm

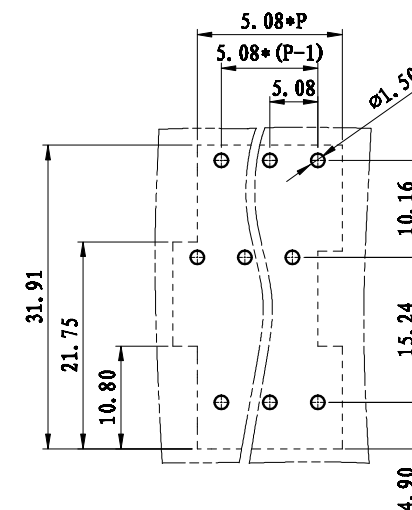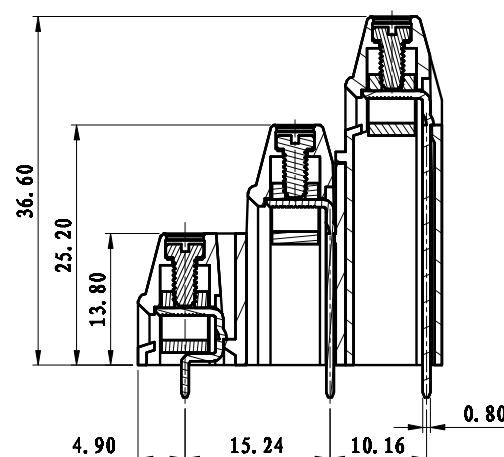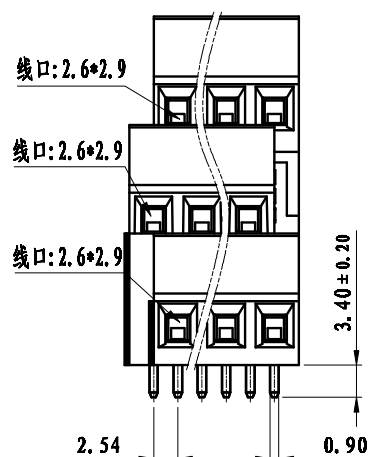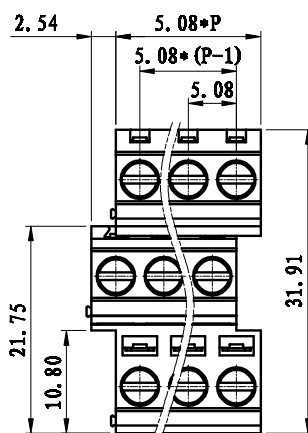

	pitch dimension			Naminl dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		▱ ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LC-耳朵螺丝	SP0YA255101V	3P	碳钢	三价铬钝化彩锌
6	LG128-铜方块	F1A0BLG1283V	3P	黄铜	镀镍
5	LG500-长焊脚	2044B0001AV	P	黄铜	镀雾锡
4	LG500-中焊脚	2042B0002AV	P	黄铜	镀雾锡
3	LG128-Y焊脚	2013B0001AV	P	黄铜	镀雾锡
2	LG500HH-5.08-主体	2055A0YXXAV	1	PA66	
1	LG500BZL-5.08-主体	2049A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE 2011/10/23	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1: 1	DWG NO.	REV: V0
上海联捷电气有限公司 Shanghai Blinker Electric CO.,LTD				TITLE	LG500BZL-5.08-3*XXP-1Y-00A LG500BZL-5.08-成品