
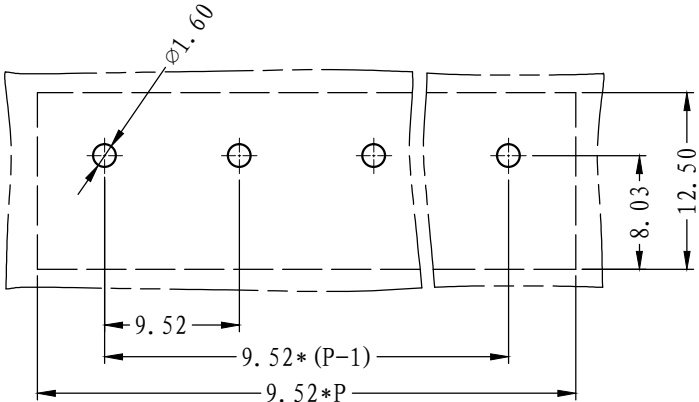
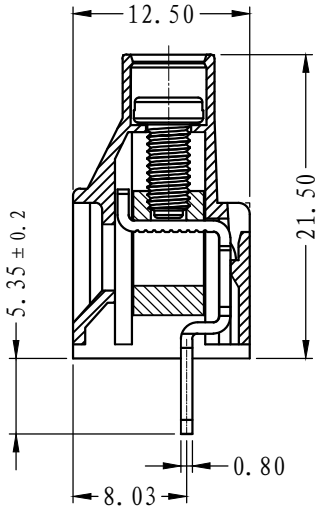
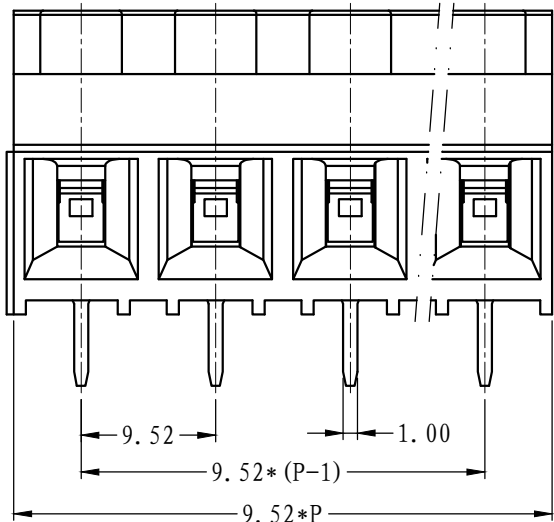


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

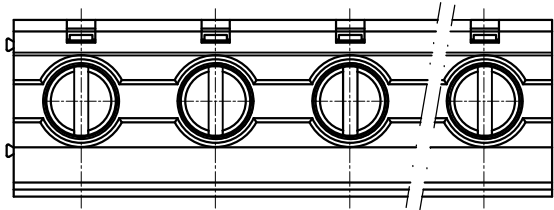

NOTES:

Pitch : 9.52mm
Rated Voltage : 300V
Rated Current : 30 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 24~10 AWG
Screw Torque Value : 0.5Nm

技术要求:

间距: 9.52mm
额定电压: 300V
额定电流: 30A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 24~10 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⌒
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LG636-铜方块	F1A0BLG6363V	P	黄铜	镀镍
3	M3*6.6(一字)	SPOYA306601V	P	碳钢	三价铬钝化彩锌
2	LG636-焊脚	2003B0001AV	P	黄铜	镀雾锡
1	LG952-9.52-主体(带拼接)	2019A0YXXAVP	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE 11-04-19	UNITS	MM	THIRD ANGLE PROJECTION SHEET
CHK.		DATE	SIZE	A4	1 of 1
APP.		DATE	SCALE	1:1	DWG NO. SP-2-2019001 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LG952-9.52-XXP-1Y-00A LG952-9.52-成品(带拼接)