
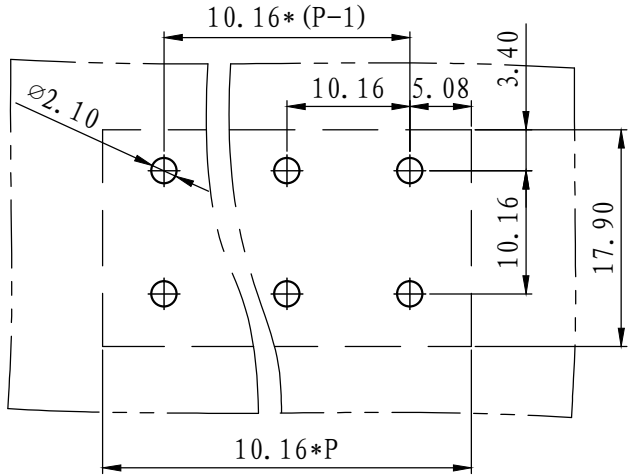
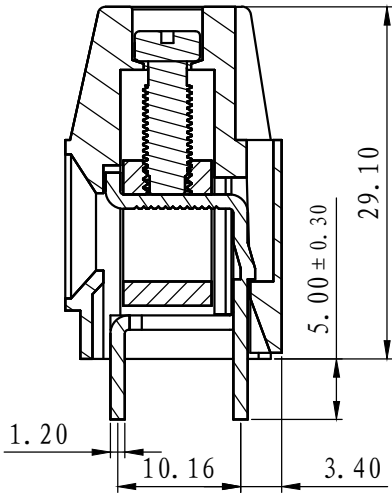
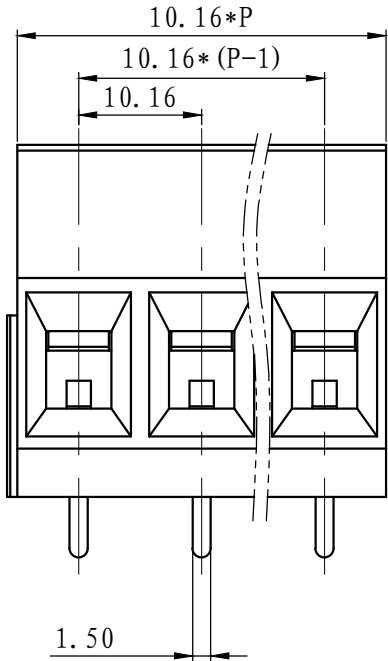


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

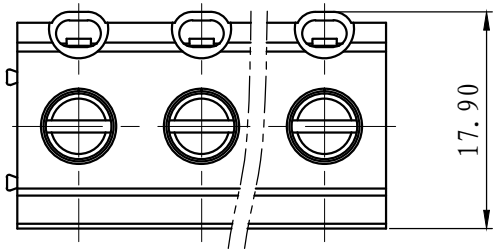

技术要求:
 间距: 10.16mm
 额定电压: 1000V
 额定电流: 57A
 耐压值: AC3500V/min
 绝缘阻抗: 1000MΩ/DC1000V
 使用条件: -40℃~+105℃
 适用线规: 20~6 AWG
 螺丝扭矩: 1.2N.m

NOTES:
 Pitch : 10.16mm
 Rated Voltage : 1000V
 Rated Current : 57A
 Withstand Voltage :
 AC3500V for 1 minute
 Insulation Resistance :
 1000MΩ / DC1000V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range :20 ~6 AWG
 Screw Torque Value : 1.2N.m

	pitch dimension			Nominal dimension					— ◇ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LG1016-螺丝	SP0YA401101V	P	碳钢	镀镍
3	LG1016-方块	F1A0BLG1163V	P	黄铜	镀镍
2	LG1016-焊脚	2069B00010V	P	黄铜	镀锡
1	LG1016B-10.16-主体	2070A0YXXAV	1	PA66	UL94V-0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2013/01/28	UNITS mm	THIRD ANGLE PROJECTION	SHEET
CHK.	DATE	SIZE A4			1 of 1
APP.	DATE	SCALE 1:1	DWG NO.	SP-1-2070A01	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O.,LTD				TITLE	LG1016B-10.16-XXP-1Y-00A LG1016B-10.16-成品