

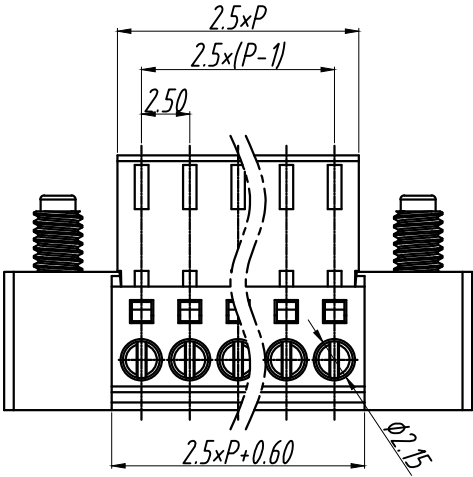


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		

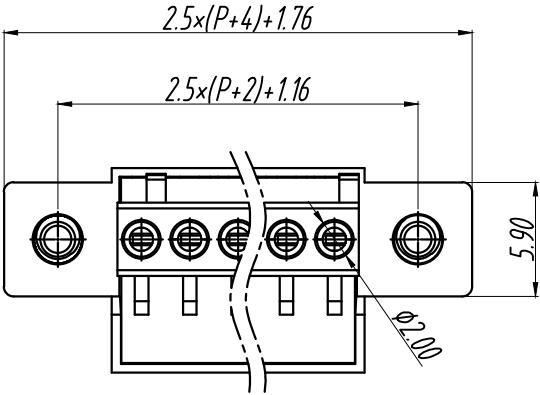

- NOTES:
1. Voltage Rating: 150V, Current Rating: 6A
 2. PITCH: 2.50mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Using Temperature Range: -40℃ ~+105℃
 5. Suitable Electric Wire: 26~18AWG
 6. Screw Torque Value: 0.1 N.m以上

- 技术要求:
1. 额定电压: 150V, 额定电流: 6A
 2. 间距: 2.50mm
 3. 耐电压值: AC 2500V/min
 4. 使用条件: -40℃ ~+105℃
 5. 适用线规: 26~18AWG
 6. 螺丝扭力: 0.1 N.m以上

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		≠ short angle sid	≡	—	□	//	⊥			
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	to 6	over 6 to 10	to 10 to 50	over 50 to 120	all	to 5 to 30	over 30 to 120	over 120 to 120				
Tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.3	0.025	0.06	0.12	0.4

6.	LC1-耳朵螺丝	SP0YA255302V	2	碳钢	三价铬钝化彩锌
5.	LC1-2.5-夹子	1263B0001AV	P	紫铜	镀亮锡
4.	LG254-2.54-铜方块	F1A0BLC2543V	P	黄铜	镀镍
3.	LG254-2.54-螺丝	SP0YA163001V	P	碳钢	三价铬钝化彩锌
2.	LC6-2.5-盖子	1023C0YXXAV	1	PA66-V0	
1.	LC1M-2.5-主体	1261M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WYY	DATE	24/9/14	UNITS	MM
CHK.	DATE		SIZE	A4	THIRD ANGLE PROJECTION
APP.	DATE		SCALE	1:1	DWG NO. SP-2-1001002
 上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LC1M-2.5-XXP-1Y-00A
					LC1M-2.5-成品