
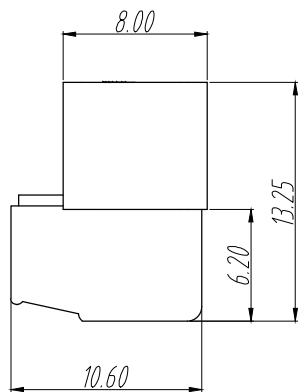
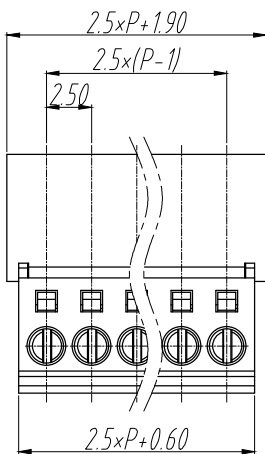


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	初版发行		

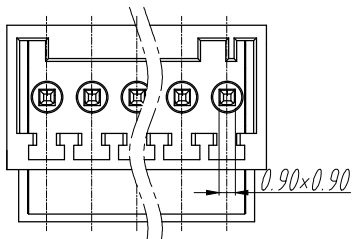

NOTES:

- 1. Voltage Rating: 150V, Current Rating: 6A
- 2. PITCH: 2.50mm
- 3. Insulation Withstands Voltage: AC2500V/min
- 4. Using Temperature Range: -40℃~+105℃
- 5. Suitable Electric Wire: 26~18AWG
- 6. Screw Torque Value: 0.1 N.m

技术要求:

- 1. 额定电压: 150V, 额定电流: 6A
- 2. 间距: 2.50mm
- 3. 耐电压值: AC 2500V/min
- 4. 使用条件: -40℃~+105℃
- 5. 适用线规: 26~18AWG
- 6. 螺丝扭力: 0.1 N.m

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5.	LC10-2.5-针		1263B0001AV		P	紫铜	镀亮锡
4.	LG254-2.54-铜方块		F1A0BLC2543V		P	黄铜	镀镍
3.	LG254-2.54-螺丝		SP0YA163001V		P	碳钢	三价铬钝化彩锌
2.	LC60-2.5-盖板		2090C0YXXAV		1	PA66-V0	
1.	LC1M-2.5-主体		1261M0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	WYY	DATE	24/9/14	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO. SP-2-1001002	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	LC10-2.5-XXP-1Y-00A
							LC10-2.5-成品