



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

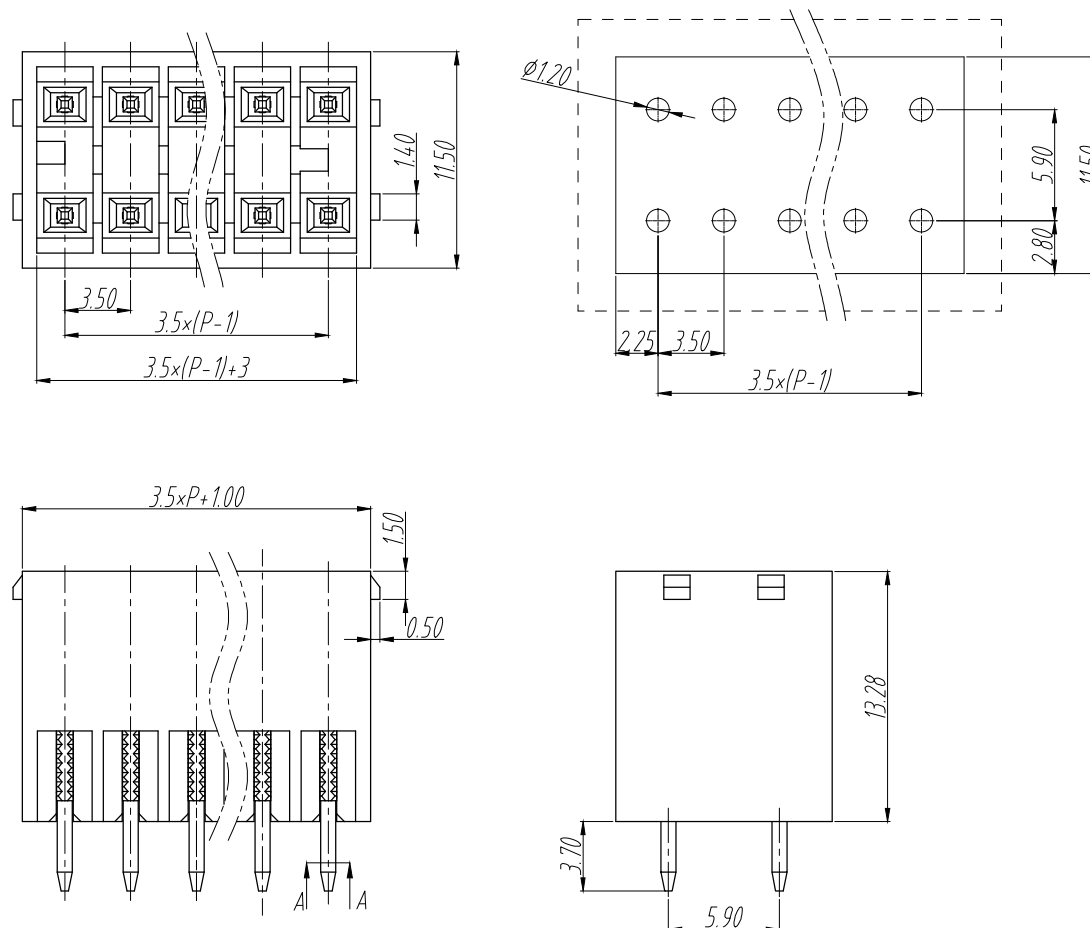

技术要求:

1. 额定电压: 300V, 额定电流: 9.5A
2. 间距: 3.5mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40℃ ~ +105℃
5. 适用线规: 28-16AWG


NOTES:

1. Voltage Rating: 300V, Current Rating: 9.5A
2. PITCH: 3.5mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40℃ ~ +105℃
5. Suitable Electric Wire: 28-16AWG

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⌒
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ4-3.5直针	1189B0001AV	2P	黄铜	
1	LZ4-3.5主体	1210A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 25/02/05	UNITS mm	THIRD ANGLE PROJECTION	
CHK.	HH	DATE 25/02/05	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1169001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ4V-3.5-2*XXP-1Y-00A
					LZ4V-3.5-成品

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

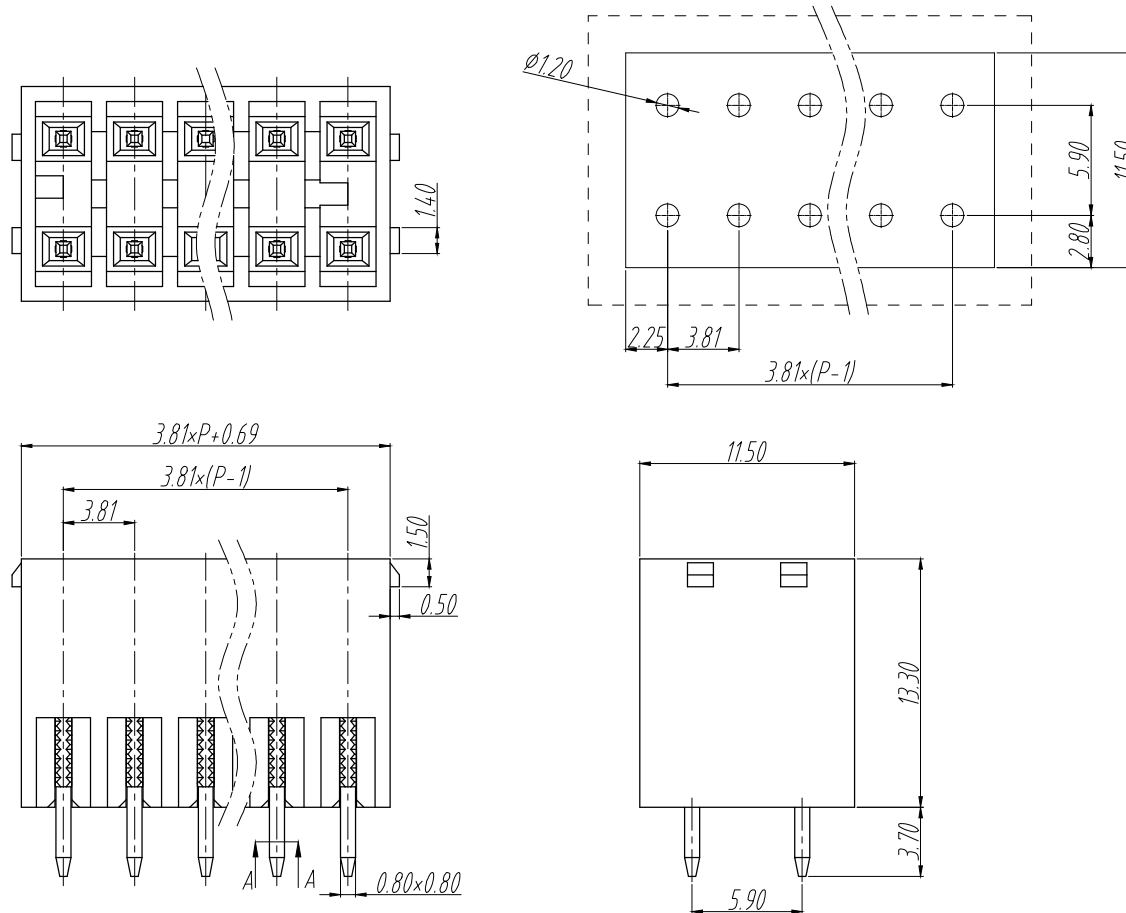

技术要求:

1. 额定电压: 300V, 额定电流: 9.5A
2. 间距: 3.81mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40℃ ~ +105℃
5. 适用线规: 28-16AWG

NOTES:

1. Voltage Rating: 300V, Current Rating: 9.5A
2. PITCH: 3.81mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40℃ ~ +105℃
5. Suitable Electric Wire: 28-16AWG

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ⌒
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

2	LZ4-3.5直针	1189B0001AV	2P	黄铜	
1	LZ4-3.81-主体	1191M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE 25/02/05	UNITS mm	THIRD ANGLE PROJECTION	
CHK.	HH	DATE 25/02/05	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1169001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LZ4V-3.81-2*XXP-1Y-00A LZ4V-3.81-成品