


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		






NOTES:

1. Voltage Rating: 150V, Current Rating: 6A
2. PITCH: 2.54mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40° C
5. Suitable Electric Wire: 26-18AWG
6. Screw Torque Value: 0.1 N.m
7. Pole: 2-24P

技术要求:

1. 额定电压: 150V, 额定电流: 6A
2. 间距: 2.54mm
3. 耐电压值: AC 2000V/min
5. 使用条件: -40° - +105°
6. 适用线规: 26-18AWG
7. 螺丝扭力: 0.1 N.m
8. 线数: 2-24P

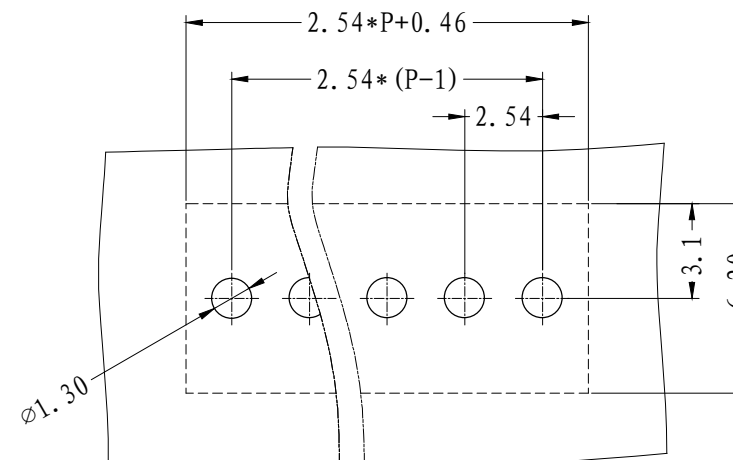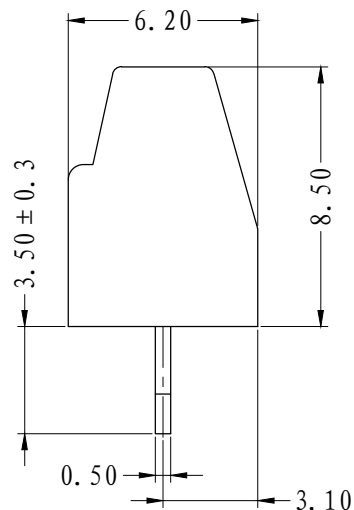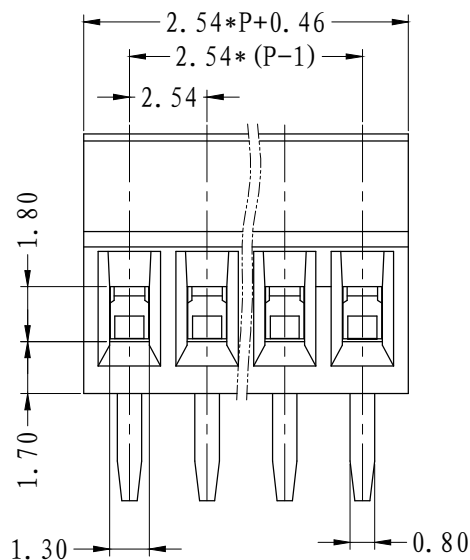

	pitch dimension			Nominal dimension					— ◇ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	M1.6*3.0	SP0YA163001V	P	碳钢	三价铬钝化彩锌
3	LG254-2.54铜方块	F1A0BLG2543V	P	黄铜	镀镍
2	LG254-2.54焊脚	2064B00010V	P	黄铜	镀锡
1	LG254-2.54-本体	2064A40XXAV	1	PA66-V0	PA66-V0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	24.12.27	UNITS	mm
CHK.	HH	DATE	24.12.27	SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LG254-2.54-XXP-1Y-00A
					LG254-2.54-成品